

Flex sockets 3/8", metric

47



Product no. 02040012
GTIN 4018754002481
Model 47 12



Label. 3/8 " Flex socket Wrench size 12mm L.48mm


Technologies and features.



High Performance Quality (HPQ®)

Our HPQ® tool is made of wear-resistant high-performance steel, yet is thin-walled and lightweight. It withstands high torques and is ideal for work in confined spaces such as turbines.

Technical Drawing.

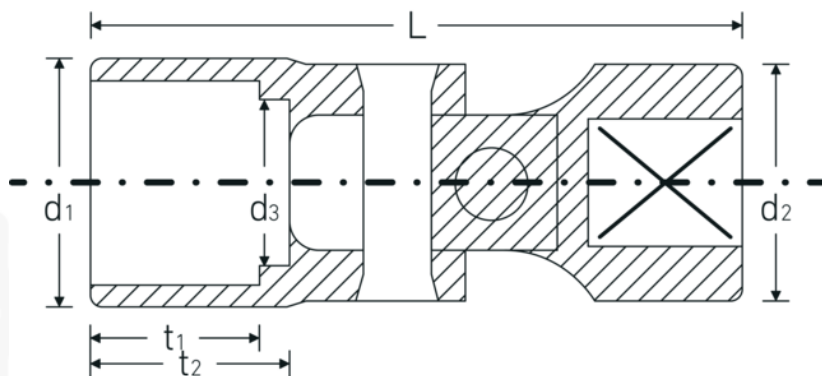

Technical Attributes.

Drive profile	bi-hex AS-Drive®
Internal square drive (inch)	3/8 "
d1	16,9 mm
d2	17,5 mm
d3	11 mm
Length mm (L)	48 mm
Width across flats [mm]	12 mm
t1	11 mm
t2	14,5 mm

Logistics data.

Depth mm (IFS)	45
Width mm (IFS)	19
Height mm (IFS)	19
Length (packed, mm)	45
Width (packed, mm)	19
Height (packed, mm)	19
Volume (packed, dm3)	0.016245 dm3
Product no.	02040012
Weight (gross, kg)	0,057
Weight PAP (kg)	0,000
Weight PVC (kg)	0,002
GTIN	4018754002481
Country of origin	GERMANY
Region of origin	Nordrhein-Westfalen
WEEE/ElektroG	nicht ear-pflichtig
Customs tariff no.	82042000
Packing standard	1
Weight	54 g

Variants.

Product no.	Model no. (ERP)	Description	GTIN
02040010	47 10	3/8 " Flex socket Wrench size 10mm L.45,5mm	4018754002467
02040011	47 11	3/8 " Flex socket Wrench size 11mm L.47,5mm	4018754002474
02040012	47 12	3/8 " Flex socket Wrench size 12mm L.48mm	4018754002481
02040013	47 13	3/8 " Flex socket Wrench size 13mm L.48mm	4018754002498
02040014	47 14	3/8 " Flex socket Wrench size 14mm L.48,5mm	4018754002504
02040015	47 15	3/8 " Flex socket Wrench size 15mm L.48,5mm	4018754002511
02040016	47 16	3/8 " Flex socket Wrench size 16mm L.51,5mm	4018754002528
02040017	47 17	3/8 " Flex socket Wrench size 17mm L.53,5mm	4018754002535
02040018	47 18	3/8 " Flex socket Wrench size 18mm L.54,5mm	4018754002542
02040019	47 19	3/8 " Flex socket Wrench size 19mm L.57mm	4018754002559

GTIN-Code.

