

Standard MANOSKOP® torque wrenches w. permanently installed ratchet

721/30 Quick



Product no.	50204030
GTIN	4018754268948
Model	721/30 QUICK



Label.

Torque wrench MANOSKOP® 721/30 Quick 60-300N·m 1/2" L. 553mm

Features.

- click-type
- the measuring element is only under load while force is being applied, no need for manual reset to zero
- rapid setting thanks to easy-action locking lever in the handle
- ergonomically designed, non-slip adjuster with a thumb recess
- dual stop signal
- twin scales N·m/ft·lb
- optimised convex handle for strain-free working
- any force applied to the tool after the 'click' or applied in the opposite direction to the current function – e.g. forcible loosening of a jammed screw - does not act on the trigger mechanism and cannot cause damage to it
- all the sensitive components are protected by the sturdy tubular steel housing
- calibration using perfectControl® calibrating unit No 7794 or calibration system No 7706. Readjustment does not require disassembly
- certificate in accordance with DIN EN ISO 6789-2:2017
- **display deviation value ± 4%**

Advantages.

Made in Germany – STAHLWILLE release torque wrench, ratchet with punch square, length 553 mm, with calibration certificate (DIN EN ISO 6789-2:2017), 50204030.

Lightning-fast and precise torque adjustment.

Patented, low-wear release system with bending rod.

Continued loading after release or loading in the opposite functional direction will not damage the torque wrench.

Product highlights.



Fast.

Rapid setting thanks to the easy-action locking lever in the handle. Ergonomically designed, non-slip adjuster with a thumb recess for fast, safe setting of the slider.



Adjustment does not require disassembly.

Quick adjustment from outside, no disassembly of the torque wrench required, with two adjustment points for the maximum & minimum values.

Technologies and features.



Factory calibration certificate (ISO calibration)


Our torque tools, transducers and test equipment are delivered with a factory calibration certificate in accordance with DIN EN ISO 6789-2 and based on DKD-R 10-8 for traceability of the measuring equipment.



2-component handle

Our 2-component handle is non-slip and ergonomically designed. It is resistant to the most common oils, greases, fuels, brake fluids and Skydrol. The arrow markings on the handle indicate the direction of operation.

Technical Drawing.

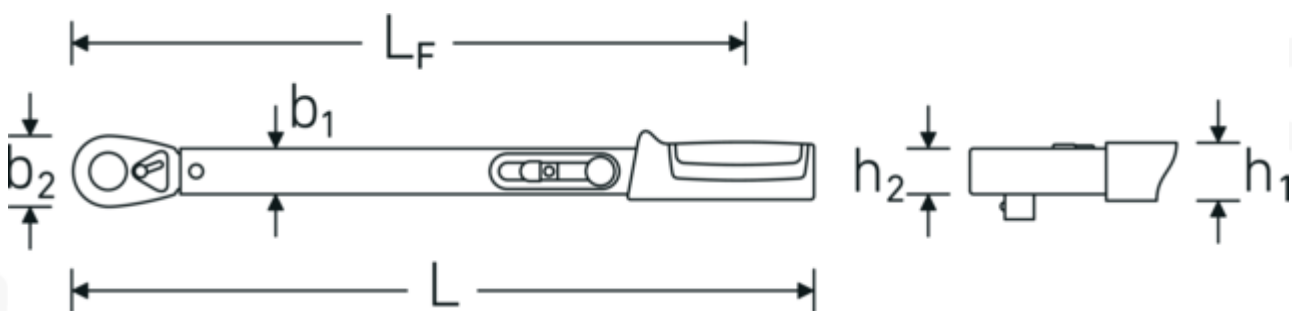

Technical Attributes.

Scale division ft-lb	10 ft-lb
Scale division N-m	10 N-m
Measuring range N-m	60-300 N-m

Logistics data.

Depth mm (IFS)	555
Width mm (IFS)	46
Height mm (IFS)	30

Measuring range ft·lb	50-220 ft·lb	Length (packed, mm)	580
External square drive (inch)	1/2	Width (packed, mm)	46
Number of teeth	36	Height (packed, mm)	45
b1	28 mm	Volume (packed, dm ³)	1.2006 dm ³
b2	44 mm	Product no.	50204030
DIN	DIN EN ISO 6789-2:2017	Weight (gross, kg)	1,810
Size	30	Weight PAP (kg)	0,000
Height mm (h1)	23 mm	Weight PVC (kg)	0,114
Height mm (h2)	27,5 mm	GTIN	4018754268948
Length mm (L)	553 mm	Country of origin AWR	GERMANY
LF	486 mm	Region of origin	Nordrhein-Westfalen
MA N·m	60 N·m	WEEE/ElektroG	nicht ear-pflichtig
Nominal value N·m	300 N·m	Customs tariff no.	82041100
		Packing standard	1
		Weight	1646 g

Variants.

Product no.	Model no. (ERP)	Description	GTIN
50204005	721/5 QUICK	Torque wrench MANOSKOP® 721/5 Quick 6-50N·m 3/8" L. 352mm	4018754268917
50204015	721/15 QUICK	Torque wrench MANOSKOP® 721/15 Quick 30-150N·m 1/2" L. 452mm	4018754268924
50204020	721/20 QUICK	Torque wrench MANOSKOP® 721/20 Quick 40-200N·m 1/2" L. 483mm	4018754268931
50204030	721/30 QUICK	Torque wrench MANOSKOP® 721/30 Quick 60-300N·m 1/2" L. 553mm	4018754268948

GTIN-Code.



Spare parts/spare part for.



59191030
Ratchet spare parts
sets for torque
wrenches No.721

Images.



STAHLWILLE Eduard Wille GmbH & Co. KG

Lindenallee 27 · 42349 Wuppertal · Germany · Phone: +49 202 4791-0 · Fax: +49 202 4791-200
info@stahlwille.de · www.stahlwille.com · Copyright by STAHLWILLE Eduard Wille GmbH & Co. KG, Wuppertal
Copyright by STAHLWILLE Eduard Wille GmbH & Co. KG, Wuppertal