



# Standard MANOSKOP® torque wrenches w.permanently installed ratchet

#### 721/5 Quick

Product no. 50204005

GTIN **4018754268917** Model **721/5 QUICK** 





Label.

Torque wrench MANOSKOP® 721/5 Quick 6-50N·m 3/8" L. 352mm

Features.

- click-type
- the measuring element is only under load while force is being applied, no need for manual reset to zero
- · rapid setting thanks to easy-action locking lever in the handle
- ergonomically designed, non-slip adjuster with a thumb recess
- dual stop signal
- twin scales N·m/ft·lb
- · optimised convex handle for strain-free working
- any force applied to the tool after the 'click' or applied in the opposite direction to the current function – e.g. forcible loosening of a jammed screw - does not act on the trigger mechanism and cannot cause damage to it
- all the sensitive components are protected by the sturdy tubular steel housing
- calibration using perfectControl® calibrating unit No 7794 or calibration system No 7706. Readjustment does not require disassembly
- certificate in accordance with DIN EN ISO 6789-2:2017
- display deviation value ± 4%

### Advantages.

Made in Germany – STAHLWILLE release torque wrench, ratchet with punch square, length 352 mm, with calibration certificate (DIN EN ISO 6789-2:2017), 50204005.

Patented, low-wear release system with bending rod.

Lightning-fast and precise torque adjustment.

Continued loading after release or loading in the opposite functional direction will not damage the torque wrench.

### Product highlights.



#### Fast.

Rapid setting thanks to the easy-action locking lever in the handle. Ergonomically designed, non-slip adjuster with a thumb recess for fast, safe setting of the slider.



#### Adjustment does not require disassembly.

Quick adjustment from outside, no disassembly of the torque wrench required, with two adjustment points for the maximum & minimum values.

# Technologies and features.



#### Factory calibration certificate (ISO calibration)


Our torque tools, transducers and test equipment are delivered with a factory calibration certificate in accordance with DIN EN ISO 6789-2 and based on DKD-R 10-8 for traceability of the measuring equipment.



#### 2-component handle

Our 2-component handle is non-slip and ergonomically designed. It is resistant to the most common oils, greases, fuels, brake fluids and Skydrol. The arrow markings on the handle indicate the direction of operation.

### Technical Drawing.

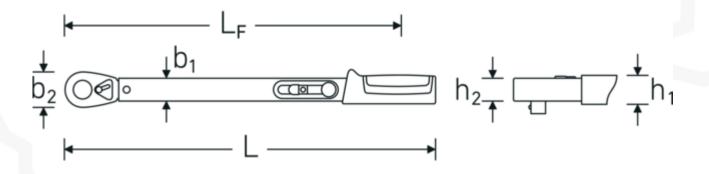

### **Technical Attributes.**

### Logistics data.

Scale division ft·lb	1 ft·lb	Depth mm (IFS)	352
Scale division N·m	2 N·m	Width mm (IFS)	40
Measuring range N·m	6-50 N·m	Height mm (IFS)	50

			13.11.2024
Measuring range ft-lb	5-36 ft·lb	Length (packed, mm)	370
External square drive	3/8	Width (packed, mm)	45
(inch)		Height (packed, mm)	50
Number of teeth	30	Volume (packed, dm3)	0.8325 dm3
b1	28 mm	Product no.	50204005
b2	27,5 mm	Weight (gross, kg)	0,960
DIN	DIN EN ISO 6789-2:2017	Weight PAP (kg)	0,000
Size	5	Weight PVC (kg)	0,000
Height mm (h1)	23 mm	GTIN	4018754268917
Height mm (h2)	14,5 mm	Country of origin AWR	GERMANY
Length mm (L)	352 mm	Region of origin	Nordrhein-Westfalen
LF	293 mm	WEEE/ElektroG	nicht ear-pflichtig
MA N·m	6 N·m	Customs tariff no.	82041100
Nominal value N·m	50 N·m	Packing standard	1
		Weight	880 g
		Weight	000 g

## Variants.

Product no.	Model no. (ERP)	Description	GTIN
50204005	721/5 QUICK	Torque wrench MANOSKOP® 721/5 Quick 6-50N·m 3/8" L. 352mm	4018754268917
50204015	721/15 QUICK	Torque wrench MANOSKOP® 721/15 Quick 30-150N·m 1/2" L. 452mm	4018754268924
50204020	721/20 QUICK	Torque wrench MANOSKOP® 721/20 Quick 40-200N·m 1/2" L. 483mm	4018754268931
50204030	721/30 QUICK	Torque wrench MANOSKOP® 721/30 Quick 60-300N·m 1/2" L. 553mm	4018754268948

# GTIN-Code.



# Spare parts/spare part for.



59191005 Ratchet spare parts sets for torque wrenches No.721

### Images.

