

Service MANOSKOP® torque wrenches w. permanently installed fine-tooth ratchet

730NR/40 FK



Product no. **96502140**
GTIN **4018754180523**
Model **730NR/40 FK**



Label. Torque wrench service MANOSKOP® 730NR/40 FK 60-300ft·lb 3/4 L. 657mm

Features.

- in sturdy plastic box (size 65 in steel box)
- **deviation of indication $\pm 4\%$**

Advantages.

Display deviation $\pm 4\%$.

Product highlights.



Adjustment does not require disassembly.

Quick adjustment from outside, no disassembly of the torque wrench required, with two adjustment points for the maximum & minimum values.



Clear fine adjustment.

The easy-to-use and easy-to-read double scale in N·m/ft·lb allows precise and easy target torque adjustment for reliable and accurate application.



Triggering dual stop signal.

When the target torque is reached, MANOSKOP® 730N provides a noticeable tactile dual stop signal.

Technologies and features.



Factory calibration certificate (ISO calibration)

Our torque tools, transducers and test equipment are delivered with a factory calibration certificate in accordance with DIN EN ISO 6789-2 and based on DKD-R 10-8 for traceability of the measuring equipment.



Low-wear flexible rod system

Our torque wrench is equipped with a low-wear trigger system with a bending beam. Unlike conventional torque wrenches with coiled springs, the flexible rod is not preloaded in unloaded state, which means that the "spring" does not need to be reset to "0" after use.



QuickRelease


The QuickRelease safety lock prevents unintentional loss of insert tools. These click securely into place, and are only released again at the push of a button for a quick tool change.



2-component handle

Our 2-component handle is non-slip and ergonomically designed. It is resistant to the most common oils, greases, fuels, brake fluids and Skydrol. The arrow markings on the handle indicate the direction of operation.

Technical Drawing.

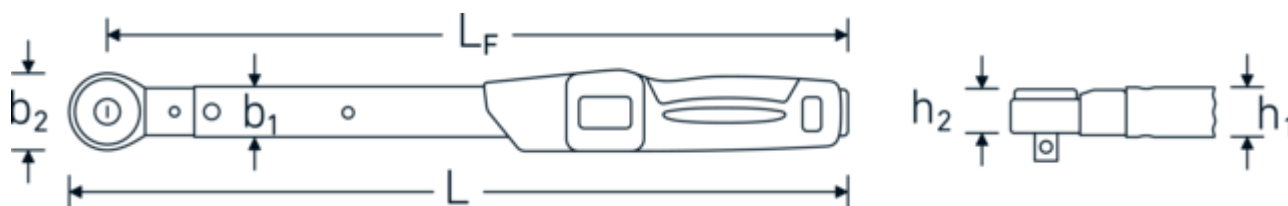

Technical Attributes.

Scale division ft·lb	10 ft·lb
Scale division N·m	20 N·m
Measuring range N·m	80-400 N·m
Measuring range ft·lb	60-300 ft·lb
External square drive (inch)	3/4

Logistics data.

Depth mm (IFS)	685
Width mm (IFS)	92
Height mm (IFS)	70
Length (packed, mm)	685
Width (packed, mm)	92
Height (packed, mm)	70

b1	28 mm	Volume (packed, dm3)	4.4114 dm3
b2	50 mm	Product no.	96502140
Width mm (b)	92 mm	Weight (gross, kg)	2,910
DIN	DIN EN ISO 6789-2:2017	Weight PAP (kg)	0,130
Fine scale division	2 N·m	Weight PVC (kg)	0,000
Weight with box	2657 g	GTIN	4018754180523
Size	40 FK	Country of origin AWR	GERMANY
Height mm (h)	70 mm	Region of origin	Nordrhein-Westfalen
Height mm (h1)	23 mm	WEEE/ElektroG	nicht ear-pflichtig
Height mm (h2)	31,5 mm	Customs tariff no.	82041100
Length mm (L)	657 mm	Packing standard	1
LF	564,5 mm	Weight	2122 g

Parts list.



81370003
Plastic case, empty



83071002
Insert for plastic box

Variants.

Product no.	Model no. (ERP)	Description	GTIN
96503105	730NR / 5FK	Torque wrench service MANOSKOP® 730NR/5 FK 7-37ft·lb 3/8 L. 364mm	4018754229376
96503110	730NR / 10FK	Torque wrench service MANOSKOP® 730NR/10 FK 15-75ft·lb 1/2 L. 420mm	4018754229383
96503120	730NR / 20FK	Torque wrench service MANOSKOP® 730NR/20 FK 30-150ft·lb 1/2 L. 513,5mm	4018754229390
96502140	730NR/40 FK	Torque wrench service MANOSKOP® 730NR/40 FK 60-300ft·lb 3/4 L. 657mm	4018754180523
96502265	730NR/65 FK-HD	Torque wrench service MANOSKOP® 730NR/65 FK-HD 100-480ft·lb 3/4 L. 944mm	4018754221554

GTIN-Code.



STAHLWILLE Eduard Wille GmbH & Co. KG

Lindenallee 27 · 42349 Wuppertal · Germany · Phone: +49 202 4791-0 · Fax: +49 202 4791-200
info@stahlwille.de · www.stahlwille.com · Copyright by STAHLWILLE Eduard Wille GmbH & Co. KG, Wuppertal
Copyright by STAHLWILLE Eduard Wille GmbH & Co. KG, Wuppertal