



Standard MANOSKOP® torque wrench w. permanently installed QuickRelease ratchet

721QR/15 Quick



Product no.	50204115
GTIN	4018754268955
Model	721QR/15 QUICK



Label.

Torque wrench MANOSKOP® 721QR/15 Quick 30-150N·m 1/2" L. 452,5mm

Features.

- Triggering
- Flash adjustment by easy-to-operate clamping lever in the handle
- ergonomically shaped, non-slip adjustment element with thumb recess
- integrated magnifying glass in the reading window
- optimised ball handle for fatigue-free working
- double stop signal
- double scale N·m/ft·lb
- no resetting to "0" required, since the measuring element is only loaded during the tightening process
- Continued loading after release or loads in the opposite direction to the functional direction, e.g. in the case of stuck bolts.
- Continued load after triggering or loads against the functional direction, e.g. with stuck screws, do not act on the trigger mechanism, which is thus protected against damage.
- Protection of all sensitive parts by the robust steel tube housing
- Calibration with the perfectControl calibration device no. 7794 or the calibration system no. 7706. If necessary, readjustment without disassembly.
- Display deviation $\pm 4\%$
- With certificate

Advantages.

Fast setting with easy-to-operate clamping lever in the handle, integrated lens for better readability of the set value

Ergonomically shaped, non-slip adjustment element with thumb recess and optimised ball handle for fatigue-free work

Efficient. No reset to "0" necessary, as measuring element is only strained during the tightening process

Releasing torque wrench with permanently installed 1/2" QuickRelease ratchet, double stop signal (tactile and audible), left-hand tightening by turning over the plug-in tools

With calibration certificate, display deviation $\pm 4\%$

Product highlights.



Fast.

Rapid setting thanks to the easy-action locking lever in the handle. Ergonomically designed, non-slip adjuster with a thumb recess for fast, safe setting of the slider.



Adjustment does not require disassembly.

Quick adjustment from outside, no disassembly of the torque wrench required, with two adjustment points for the maximum & minimum values.

Technologies and features.



QuickRelease

The QuickRelease safety lock prevents unintentional loss of insert tools. These click securely into place, and are only released again at the push of a button for a quick tool change.



**DIN EN
ISO 6789-2**

Factory calibration certificate (ISO calibration)

Our torque tools, transducers and test equipment are delivered with a factory calibration certificate in accordance with DIN EN ISO 6789-2 and based on DKD-R 10-8 for traceability of the measuring equipment.





2K

2-component handle

Our 2-component handle is non-slip and ergonomically designed. It is resistant to the most common oils, greases, fuels, brake fluids and Skydrol. The arrow markings on the handle indicate the direction of operation.

Technical Drawing.

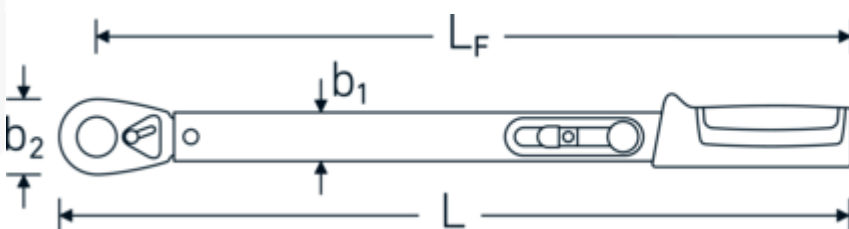

Technical Attributes.

Scale division ft·lb	5 ft·lb
Scale division N·m	5 N·m
Measuring range N·m	30-150 N·m
Measuring range ft·lb	25-110 ft·lb
External square drive (inch)	1/2
b1	28 mm
b2	41 mm
DIN	DIN EN ISO 6789-2:2017
Size	15
Height mm (h1)	23 mm
Height mm (h2)	18 mm
Length mm (L)	452,5 mm
LF	387 mm
MA N·m	30 N·m
Nominal value N·m	150 N·m

Logistics data.

Depth mm (IFS)	455
Width mm (IFS)	43
Height mm (IFS)	40
Length (packed, mm)	475
Width (packed, mm)	45
Height (packed, mm)	45
Volume (packed, dm ³)	0.961875 dm ³
Product no.	50204115
Weight (gross, kg)	1,378
Weight PAP (kg)	0,000
Weight PVC (kg)	0,011
GTIN	4018754268955
Country of origin AWR	GERMANY
Region of origin	Nordrhein-Westfalen
WEEE/ElektroG	nicht ear-pflichtig
Customs tariff no.	82041100
Packing standard	1
Weight	1268 g

Variants.

Product no.	Model no. (ERP)	Description	GTIN
50204115	721QR/15 QUICK	Torque wrench MANOSKOP® 721QR/15 Quick 30-150N·m 1/2" L. 452,5mm	4018754268955
50204120	721QR/20 QUICK	Torque wrench MANOSKOP® 721QR/20 Quick 40-200N·m 1/2" L. 482mm	4018754268962

GTIN-Code.



Images.





STAHLWILLE Eduard Wille GmbH & Co. KG

Lindenallee 27 · 42349 Wuppertal · Germany · Phone: +49 202 4791-0 · Fax: +49 202 4791-200
info@stahlwille.de · www.stahlwille.com · Copyright by STAHLWILLE Eduard Wille GmbH & Co. KG, Wuppertal
Copyright by STAHLWILLE Eduard Wille GmbH & Co. KG, Wuppertal