



## Torque wrench service MANOSKOP® (N·m/in·lb)

### 730a Quick



Product no. **50584012**  
GTIN **4018754268993**  
Model **730A/12 QUICK**



#### Label.

Torque wrench service MANOSKOP® 730a Quick 25-130N·m 14 x 18 mm L. 410mm



#### Product highlights.



##### **Adjustment does not require disassembly.**

Quick adjustment from outside, no disassembly of the torque wrench required, with two adjustment points for the maximum & minimum values.



## Technologies and features.



### QuickRelease

The QuickRelease safety lock prevents unintentional loss of insert tools. These click securely into place and are only released again at the push of a button for a quick tool change.



### Factory calibration certificate (ISO calibration)

Our torque tools, transducers and test equipment are delivered with a factory calibration certificate in accordance with DIN EN ISO 6789-2 and based on DKD-R 10-8 for traceability of the measuring equipment.



### Low-wear flexible rod system


Our torque wrench is equipped with a low-wear trigger system with a bending beam. Unlike conventional torque wrenches with coiled springs, the flexible rod is not preloaded in unloaded state, which means that the 'spring' does not need to be reset to "0" after use.



### 2-component handle

Our 2-component handle is non-slip and ergonomically designed. It is resistant to the most common oils, greases, fuels, brake fluids and Skydrol. The arrow markings on the handle indicate the direction of operation.

## Technical Drawing.

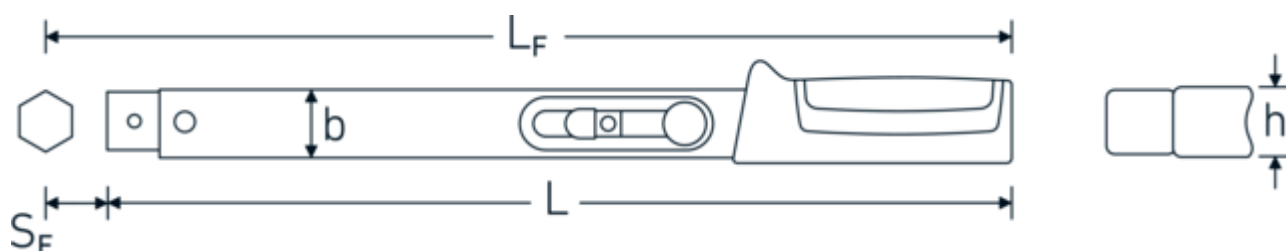

## Technical Attributes.

Scale division in·lb	25 in·lb
Scale division N·m	2,5 N·m
Measuring range N·m	25-130 N·m
Measuring range in·lb	225-1150 in·lb
Width mm (b)	28 mm

## Logistics data.

Depth mm (IFS)	405
Width mm (IFS)	50
Height mm (IFS)	40
WEEE/ElektroG	nicht ear-pflichtig
Length (packed, mm)	435

<b>DIN</b>	DIN EN ISO 6789-2:2017	<b>Width (packed, mm)</b>	50
<b>Size</b>	a/12	<b>Height (packed, mm)</b>	50
<b>Size tool holder [internal square drive]</b>	14 x 18 mm	<b>Volume (packed, dm3)</b>	1.0875 dm3
<b>Height mm (h)</b>	23 mm	<b>Product no.</b>	50584012
<b>Length mm (L)</b>	410 mm	<b>Weight (gross, kg)</b>	1,186
<b>LF</b>	390 mm	<b>Weight PAP (kg)</b>	0,000
<b>SF</b>	25 mm	<b>Weight PVC (kg)</b>	0,110
		<b>GTIN</b>	4018754268993
		<b>Country of origin AWR</b>	GERMANY
		<b>Region of origin</b>	Nordrhein-Westfalen
		<b>Customs tariff no.</b>	82041100
		<b>Packing standard</b>	1
		<b>Weight</b>	1076 g

## Variants.

Product no.	Model no. (ERP)	Description	GTIN
50584005	730A/5 QUICK	Torque wrench service MANOSKOP® 730a Quick 6-50N·m 9 x 12 mm L. 315mm	4018754268979
50584010	730A/10 QUICK	Torque wrench service MANOSKOP® 730a Quick 20-100N·m 9 x 12 mm L. 370mm	4018754268986
50584012	730A/12 QUICK	Torque wrench service MANOSKOP® 730a Quick 25-130N·m 14 x 18 mm L. 410mm	4018754268993
50584020	730A/20 QUICK	Torque wrench service MANOSKOP® 730a Quick 40-200N·m 14 x 18 mm L. 455mm	4018754269006

## GTIN-Code.



## Images.



