



## Torque wrench service MANOSKOP® (in·lb)

### 730a Quick



Product no. **50584002**  
GTIN **4018754292684**  
Model **730A/2 QUICK**



#### Label.

Torque wrench service MANOSKOP® (in·lb) 730a Quick 30-175in lb 9 x 12 mm L.  
179mm

## Product highlights.



#### Adjustment does not require disassembly.

Quick adjustment from outside, no disassembly of the torque wrench required, with two adjustment points for the maximum & minimum values.



## Technologies and features.



#### QuickRelease

The QuickRelease safety lock prevents unintentional loss of insert tools. These click securely into place and are only released again at the push of a button for a quick tool change.



### Tool Control System

The intelligent modular insert system protects and organizes the tools in tool boxes, workshop trolleys and workshop benches. Two-color foam inlays make checking the completeness of the tools quick and easy.



### Factory calibration certificate (ISO calibration)

Our torque tools, transducers and test equipment are delivered with a factory calibration certificate in accordance with DIN EN ISO 6789-2 and based on DKD-R 10-8 for traceability of the measuring equipment.



### Low-wear flexible rod system


Our torque wrench is equipped with a low-wear trigger system with a bending beam. Unlike conventional torque wrenches with coiled springs, the flexible rod is not preloaded in unloaded state, which means that the 'spring' does not need to be reset to "0" after use.



### 2-component handle

Our 2-component handle is non-slip and ergonomically designed. It is resistant to the most common oils, greases, fuels, brake fluids and Skydrol. The arrow markings on the handle indicate the direction of operation.

## Technical Drawing.

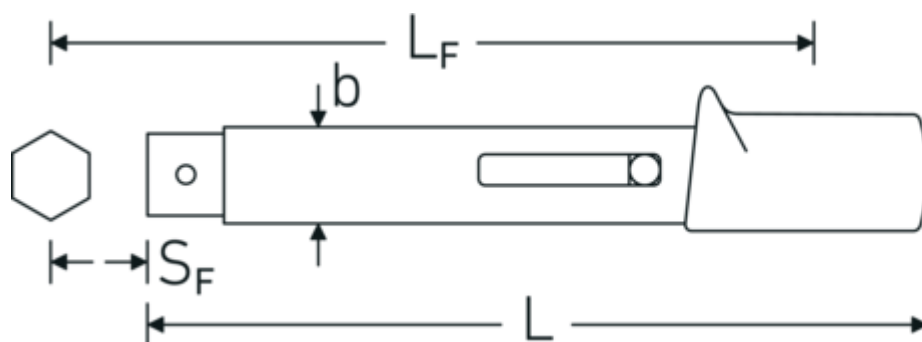

## Technical Attributes.

Scale division in-lb	5 in-lb
Measuring range in-lb	30-175 in-lb
Width mm (b)	27.5 mm
Size	a/2
Size tool holder [internal square drive]	9 x 12 mm
Height mm (h)	23,6 mm

## Logistics data.

Depth mm (IFS)	180
Width mm (IFS)	40
Height mm (IFS)	30
WEEE/ElektroG	nicht ear-pflichtig
Length (packed, mm)	220
Width (packed, mm)	60
Height (packed, mm)	60

Length mm (L)	179 mm	Volume (packed, dm3)	0.792 dm3
LF	157,2 mm	Product no.	50584002
SF	17,5 mm	Weight (gross, kg)	0,396
		Weight PAP (kg)	0,000
		Weight PVC (kg)	0,006
		GTIN	4018754292684
		Country of origin AWR	GERMANY
		Region of origin	Nordrhein-Westfalen
		Customs tariff no.	82041100
		Packing standard	1
		Weight	315 g

**Variants.**

Product no.	Model no. (ERP)	Description	GTIN
50584001	730A/2-1 QUICK	Torque wrench service MANOSKOP® (in·lb) 730a Quick 17,5-87,5in lb 9 x 12 mm L. 179mm	4018754292677
50584002	730A/2 QUICK	Torque wrench service MANOSKOP® (in·lb) 730a Quick 30-175in lb 9 x 12 mm L. 179mm	4018754292684
50584004	730A/4 QUICK	Torque wrench service MANOSKOP® (in·lb) 730a Quick 70-350in lb 9 x 12 mm L. 223mm	4018754292691

**GTIN-Code.**

