



Torque wrench service MANOSKOP® (N·m/ft·lb)

730 Quick



Product no. **50184012**
GTIN **4018754268863**
Model **730/12 QUICK**



Label.

Torque wrench service MANOSKOP® 730 Quick 25-130N·m 14 x 18 mm L. 410mm



Product highlights.



Adjustment does not require disassembly.

Quick adjustment from outside, no disassembly of the torque wrench required, with two adjustment points for the maximum & minimum values.



Technologies and features.



QuickRelease

The QuickRelease safety lock prevents unintentional loss of insert tools. These click securely into place and are only released again at the push of a button for a quick tool change.



Factory calibration certificate (ISO calibration)

Our torque tools, transducers and test equipment are delivered with a factory calibration certificate in accordance with DIN EN ISO 6789-2 and based on DKD-R 10-8 for traceability of the measuring equipment.



Low-wear flexible rod system


Our torque wrench is equipped with a low-wear trigger system with a bending beam. Unlike conventional torque wrenches with coiled springs, the flexible rod is not preloaded in unloaded state, which means that the 'spring' does not need to be reset to "0" after use.



2-component handle

Our 2-component handle is non-slip and ergonomically designed. It is resistant to the most common oils, greases, fuels, brake fluids and Skydrol. The arrow markings on the handle indicate the direction of operation.

Technical Drawing.

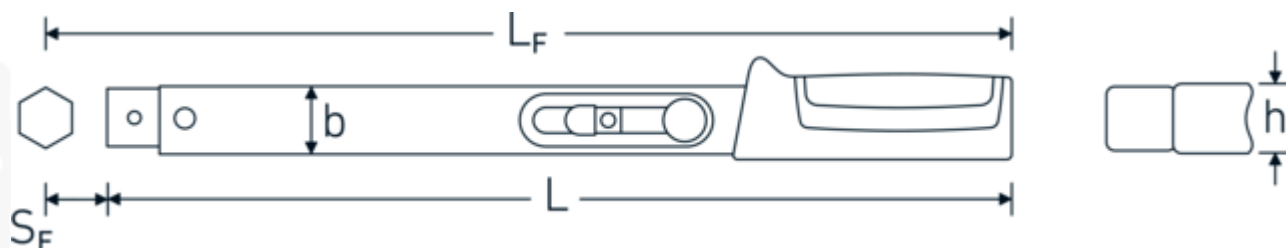

Technical Attributes.

Scale division ft·lb	2,5 ft·lb
Scale division N·m	2,5 N·m
Measuring range N·m	25-130 N·m
Measuring range ft·lb	20-95 ft·lb
Width mm (b)	28 mm
DIN	DIN EN ISO 6789-2:2017
Size	12
Size tool holder [internal square drive]	14 x 18 mm
Height mm (h)	23 mm
Length mm (L)	410 mm
LF	390 mm
SF	25 mm

Logistics data.

Depth mm (IFS)	406
Width mm (IFS)	42
Height mm (IFS)	34
WEEE/ElektroG	nicht ear-pflichtig
Length (packed, mm)	434
Width (packed, mm)	51
Height (packed, mm)	51
Volume (packed, dm3)	1.128834 dm3
Product no.	50184012
Weight (gross, kg)	1,210
Weight PAP (kg)	0,000
Weight PVC (kg)	0,110
GTIN	4018754268863
Country of origin AWR	GERMANY
Region of origin	Nordrhein-Westfalen
Customs tariff no.	82041100
Packing standard	1
Weight	1074 g

Variants.

Product no.	Model no. (ERP)	Description	GTIN
50184005	730/5 QUICK	Torque wrench service MANOSKOP® 730 Quick 6-50N·m 9 x 12 mm L. 315mm	4018754268856
50184010	730/10 QUICK	Torque wrench service MANOSKOP® 730 Quick 20-100N·m 9 x 12 mm L. 370mm	4018754266203
50184012	730/12 QUICK	Torque wrench service MANOSKOP® 730 Quick 25-130N·m 14 x 18 mm L. 410mm	4018754268863
50184020	730/20 QUICK	Torque wrench service MANOSKOP® 730 Quick 40-200N·m 14 x 18 mm L. 455mm	4018754268870
50184030	730/30 QUICK	Torque wrench service MANOSKOP® 730 Quick 60-300N·m 14 x 18 mm L. 520mm	4018754324071
50184040	730/40 QUICK	Torque wrench service MANOSKOP® 730 Quick 80-400N·m 14 x 18 mm L. 590mm	4018754268887

50184065	730/65 QUICK	Torque wrench service MANOSKOP® 730 Quick 130-650N·m 14 x 18 mm L. 875mm	4018754268894
50184565	730II/65 QUICK	Torque wrench service MANOSKOP® 730 Quick 130-650N·m 22 x 28 mm L. 897mm	4018754268900

GTIN-Code.



Images.

