



## Electronic angle and torque wrench SENSOTORK®

713R



Product no. 96501606  
GTIN 4018754156504  
Model 713R/6



**Label.** Electron.angle and torque wrench SENSOTORK® 713R 3-60N·m 3/8" L. 378mm

### Product highlights.



**Accuracy counts - uncertainty is reduced to a minimum to guarantee accurate readings.**



#### Multisensory.

The torque achieved is indicated by visual, audible and tactile signals - with a multicoloured backlit LED display, acoustic signal and vibration.

### Technologies and features.



#### Factory calibration certificate (ISO calibration)


Our torque tools, transducers and test equipment are delivered with a factory calibration certificate in accordance with DIN EN ISO 6789-2 and based on DKD-R 10-8 for traceability of the measuring equipment.



### QuickRelease

The QuickRelease safety lock prevents unintentional loss of insert tools. These click securely into place and are only released again at the push of a button for a quick tool change.

## Technical Drawing.

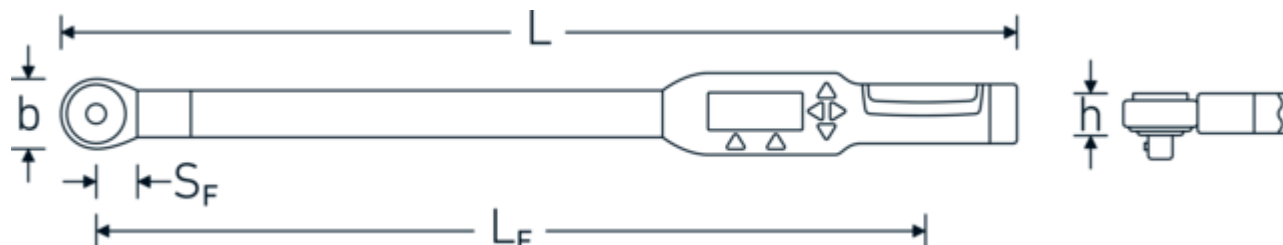

## Technical Attributes.

|  |                        |
|--|------------------------|
| Measuring range N·m                      | 3-60 N·m               |
| Measuring range ft·lb                    | 2,5-44 ft·lb           |
| External square drive (inch)             | 3/8                    |
| Number of teeth                          | 60                     |
| Battery type                             | Mignon (AA) 1,5V       |
| Width mm (b)                             | 33 mm                  |
| DIN                                      | DIN EN ISO 6789-2:2017 |
| Weight with box                          | 1500 g                 |
| Size                                     | 6                      |
| Size tool holder [internal square drive] | 9 x 12 mm              |
| Height mm (h)                            | 24 mm                  |
| Length mm (L)                            | 378 mm                 |
| LF                                       | 299 mm                 |
| SF                                       | 17,5 mm                |

## Logistics data.

|                                   |                       |
|-----------------------------------|-----------------------|
| Depth mm (IFS)                    | 560                   |
| Width mm (IFS)                    | 93                    |
| Height mm (IFS)                   | 75                    |
| WEEE/ElektroG                     | Kleingeräte B2C       |
| Length (packed, mm)               | 560                   |
| Width (packed, mm)                | 93                    |
| Height (packed, mm)               | 75                    |
| Volume (packed, dm <sup>3</sup> ) | 3.906 dm <sup>3</sup> |
| Product no.                       | 96501606              |
| Weight (gross, kg)                | 1,460                 |
| Weight PAP (kg)                   | 0,095                 |
| Weight PVC (kg)                   | 0,000                 |
| GTIN                              | 4018754156504         |
| Country of origin AWR             | GERMANY               |
| Region of origin                  | Nordrhein-Westfalen   |
| Customs tariff no.                | 82041100              |
| Packing standard                  | 1                     |
| Weight                            | 856 g                 |

## Parts list.



81370002  
Plastic box, empty



83071006  
Insert

## Variants.

| Product no. | Model no. (ERP) | Description  | GTIN          |
|-------------|-----------------|--|---------------|
| 96501606    | 713R/6          | Electron.angle and torque wrench<br>SENSOTORK® 713R 3-60N·m 3/8" L.<br>378mm   | 4018754156504 |
| 96501620    | 713R/20         | Electron.angle and torque wrench<br>SENSOTORK® 713R 10-200N·m 1/2" L.<br>608mm | 4018754156511 |
| 96501640    | 713R/40         | Electron.angle and torque wrench<br>SENSOTORK® 713R 20-400N·m 3/4" L.<br>838mm | 4018754156528 |

## GTIN-Code.



# Images.

