



130a



Product no. 40572020

GTIN **4018754020645**

Model 130a 5/16











Label.

Combination spanner Spanner size 5/16 " L.115mm

Features.

- Fed. Spec. GGG-W-636 E
- · HPQ® heavy-duty steel, chrome-plated

Advantages.

Made in Germany – STAHLWILLE Combination spanner, inch , open end 15 $^\circ$ angled, length 115 mm, Fed. Spec. GGG-W-636 E, , 40572020

The double-T profile gives the spanner outstanding bending strength.

Special manufacturing process makes thin-walled rings possible – perfect for screwdriving in places that are difficult to access.

The distinctive STAHLWILLE rounded finish gives the spanner a non-slip and pleasant feel for safe working, even with oil-smeared hands.

Product highlights.



A solution for every situation.

Our combination spanners are available in different versions (metric, imperial, long, with Spline-Drive profile) and as sets in textile bags, roll-up tool pouches or TCS inserts.

Technologies and features.



High Performance Quality (HPQ®)

Our HPQ® tool is made of wear-resistant high-performance steel, yet is thin-walled and lightweight. It withstands high torques and is ideal for work in confined spaces such as turbines.



Anti-Slip-Drive

The special AS-Drive profile makes high force transmission to the flats of screws and bolts possible without damaging them. This also prevents stripping of the screw head.



Double-T profile

Our combination and ring spanners have an additional recess in the middle of the tool. Similar to the principle of a double T-beam, this provides a tremendous load capacity and maximum strength whilst reducing weight.



Thin-walled rings


The thin wall diameter of our rings makes it easier to work in confined spaces. The ring sides are taller than standard nuts, which prevents jamming.



Offset Shaft Design

Our spanners are specially designed with additional reinforcement in the load zones where the greatest amount of force is transmitted - namely where the jaw meets the shank - in order to prevent deformation.

Technical Drawing.

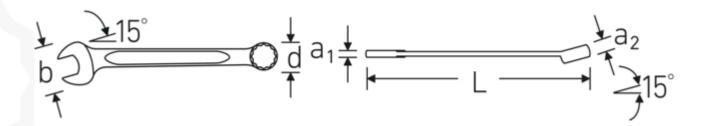

Technical Attributes.

a1	4,5 mm
a2	7 mm
Width mm (b)	17 mm
d	12 mm
DIN	Fed. Spec. GGG- W-636 E
Length mm (L)	115 mm
Jaw angle	15 °
Ring position	15 °
Spanner size 1 [inch]	5/16 "
Spanner size 2 [inch]	5/16 "

Logistics data.

Depth mm (IFS)	114
Width mm (IFS)	17
Height mm (IFS)	10
Length (packed, mm)	120
Width (packed, mm)	30
Height (packed, mm)	35
Volume (packed, dm3)	0.126 dm3
Product no.	40572020
Weight (gross, kg)	0,200
Weight PAP (kg)	0,000
Weight PVC (kg)	0,003
GTIN	4018754020645
Country of origin AWR	GERMANY
Region of origin	Nordrhein-Westfalen
WEEE/ElektroG	nicht ear-pflichtig
Customs tariff no.	82041100
Packing standard	10
Weight	20 g

Variants.

Product no.	Model no. (ERP)	Description	GTIN
40571616	130a 1/4	Combination spanner Spanner size 1/4 "L.105mm	4018754020621
40571818	130a 9/32	Combination spanner Spanner size 9/32 " L.110mm	4018754020638
40572020	130a 5/16	Combination spanner Spanner size 5/16 " L.115mm	4018754020645
40572222	130a 11/32	Combination spanner Spanner size 11/32 " L.120mm	4018754020652
40572424	130a 3/8	Combination spanner Spanner size 3/8 " L.125mm	4018754020669
40572828	130a 7/16	Combination spanner Spanner size 7/16 " L.135mm	4018754020676
40573232	130a 1/2	Combination spanner Spanner size 1/2 " L.150mm	4018754020683
40573434	130a 9/16	Combination spanner Spanner size 9/16 " L.165mm	4018754020690

GTIN-Code.

