

■ \$\int \text{STAHLWILLE} \times \text{\text{MANOSKOP}} \\
\text{MANOSKOP} \\
\text{330a/10 Quick} \\
\text{Manoskops} \\
\text{180-880 ir} \\
\text{180-880 ir}

Torque wrench service MANOSKOP® (N·m/in·lb)

730a Quick

Product no. 50584010

GTIN 4018754268986 Model 730A/10 QUICK











Torque wrench service MANOSKOP® 730a Quick 20-100N·m 9 x 12 mm L. 370mm







Product highlights.





Adjustment does not require disassembly.

Quick adjustment from outside, no disassembly of the torque wrench required, with two adjustment points for the maximum & minimum values.

Technologies and features.



QuickRelease

The QuickRelease safety lock prevents unintentional loss of insert tools. These click securely into place and are only released again at the push of a button for a quick tool change.



Factory calibration certificate (ISO calibration)

Our torque tools, transducers and test equipment are delivered with a factory calibration certificate in accordance with DIN EN ISO 6789-2 and based on DKD-R 10-8 for traceability of the measuring equipment.



Low-wear flexible rod system


Our torque wrench is equipped with a low-wear trigger system with a bending beam. Unlike conventional torque wrenches with coiled springs, the flexible rod is not preloaded in unloaded state, which means that the 'spring' does not need to be reset to "0" after use.



2-component handle

Our 2-component handle is non-slip and ergonomically designed. It is resistant to the most common oils, greases, fuels, brake fluids and Skydrol. The arrow markings on the handle indicate the direction of operation.

Technical Drawing.

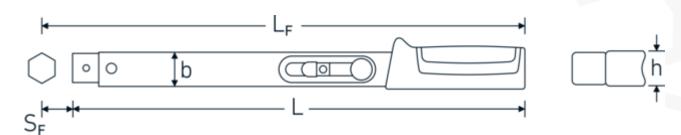

Technical Attributes.

Logistics data.

Scale division in·lb	20 in·lb	Depth mm (IFS)	371
Scale division N·m	2,5 N·m	Width mm (IFS)	50
Measuring range N·m	20-100 N·m	Height mm (IFS)	35
Measuring range in·lb	180-880 in·lb	WEEE/ElektroG	nicht ear-pflichtig
Width mm (b)	28 mm	Length (packed, mm)	400

DIN	DIN EN ISO 6789-2:2017	Width (packed, mm)	50
Size	a/10	Height (packed, mm)	45
Size tool holder [internal	9 x 12 mm	Volume (packed, dm3)	0.9 dm3
square drive]		Product no.	50584010
Height mm (h)	23 mm	Weight (gross, kg)	1,044
Length mm (L)	370 mm	Weight PAP (kg)	0,000
LF	343 mm	Weight PVC (kg)	0,011
SF	17,5 mm	GTIN	4018754268986
		Country of origin AWR	GERMANY
		Region of origin	Nordrhein-Westfalen
		Customs tariff no.	82041100
		Packing standard	1
		Weight	934 g

Variants.

	Product no.	Model no. (ERP)	Description	GTIN
	50584005	730A/5 QUICK	Torque wrench service MANOSKOP® 730a Quick 6-50N·m 9 x 12 mm L. 315mm	4018754268979
•	50584010	730A/10 QUICK	Torque wrench service MANOSKOP® 730a Quick 20-100N·m 9 x 12 mm L. 370mm	4018754268986
•	50584012	730A/12 QUICK	Torque wrench service MANOSKOP® 730a Quick 25-130N·m 14 x 18 mm L. 410mm	4018754268993
•	50584020	730A/20 QUICK	Torque wrench service MANOSKOP® 730a Quick 40-200N·m 14 x 18 mm L. 455mm	4018754269006

GTIN-Code.



Images.

