

STAHLWILLE ***

Torque wrench service MANOSKOP®

730/80

 Product no.
 50180080

 GTIN
 4018754114764

 Model
 730/80



Label.

Torque wrench service MANOSKOP® 730/80 160-800N·m L. 970mm

Product highlights.



Adjustment does not require disassembly.

Quick adjustment from outside, no disassembly of the torque wrench required, with two adjustment points for the maximum & minimum values.

Technologies and features.




Factory calibration certificate (ISO calibration)

Our torque tools, transducers and test equipment are delivered with a factory calibration certificate in accordance with DIN EN ISO 6789-2 and based on DKD-R 10-8 for traceability of the measuring equipment.

Low-wear flexible rod system

Our torque wrench is equipped with a low-wear trigger system with a bending beam. Unlike conventional torque wrenches with coiled springs, the flexible rod is not preloaded in unloaded state, which means that the 'spring' does not need to be reset to "0" after use.

Technical Drawing.

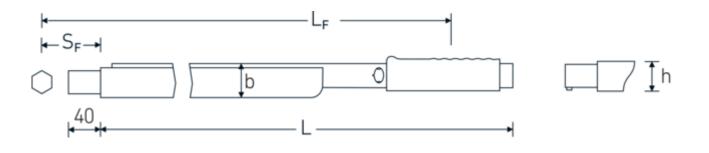

Technical Attributes.

Logistics data.

Scale division ft·lb	20 ft·lb	Depth mm (IFS)	1010
Scale division N·m	20 N·m	Width mm (IFS)	43
Measuring range N·m	160-800 N·m	Height mm (IFS)	55
Measuring range ft·lb	120-600 ft·lb	WEEE/ElektroG	nicht ear-pflichtig
External square drive (mm)	24,5 x 28 mm	Length (packed, mm)	1140
Width mm (b)	46 mm	Width (packed, mm)	150
Height mm (h)	43 mm	Height (packed, mm)	65
Length mm (L)	970 mm	Volume (packed, dm3)	11.115 dm3
LF	990 mm	Product no.	50180080
SF	95 mm	Weight (gross, kg)	5,796
		Weight PAP (kg)	0,000
		Weight PVC (kg)	0,040
		GTIN	4018754114764
		Country of origin AWR	GERMANY
		Region of origin	Nordrhein-Westfalen
		Customs tariff no.	82041100
		Packing standard	1
		Weight	4925 g

Variants.

Product no.	Model no. (ERP)	Description	GTIN
50180080	730/80	Torque wrench service MANOSKOP® 730/80 160-800N∙m L. 970mm	4018754114764

GTIN-Code.



Copyright by STAHLWILLE Eduard Wille GmbH & Co. KG, Wuppertal