



Torque wrench

750NR



Product no.	50021004
GTIN	4018754348350
Model	750NR/200



Label.

Torque wrench 750NR 40-200N·m 1/2" L. 526,7mm

Features.

- fixed, reversible fine-tooth ratchet with square drive
- resilient, long-lasting spring mechanism
- triggering with audible and palpable "click" (dual stop signal)
- quick adjustment of the target torque thanks to easy-to-operate rotary knob in the handle (Quick-Select)
- fixing of the specified torque via an anti-twist lock
- double scale N·m/ft·lb
- ready for operation again immediately after release
- for controlled clockwise tightening
- trigger mechanism resilient to further and counter-loading
- safe handling through the ergonomically shaped, 2-component handle (resistant to oils, greases, fuels, brake fluids and Skydrol)
- with calibration certificate in accordance with DIN EN ISO 6789-2:2017
- **display deviation $\pm 4\%$**

Advantages.

Adjustable, triggering and low-maintenance torque wrench with fixed fine-tooth ratchet for manufacturing industry, trades and DIY enthusiasts.

Quick, effortless and precise adjustment and fixing of the target torque is carried out via a rotary knob at the end of the handle.

Ergonomically shaped, non-slip 2-component handle with hand stop ensures fatigue-free work.

When triggered, a strong haptic and acoustic "click" is generated (dual stop signal).

Easy-to-read double scale (N·m/lb·ft) with additional fine scale prevents reading errors during torque adjustment.



Product highlights.



The fast one.

Target torque adjustment takes place in steps of 10 N·m per revolution. This saves valuable time, especially in situations where the torque needs to be changed frequently. With this feature, the 750NR sets new standards in speed and ease of use.



Minimum installation space requirements.

Our torque wrench is equipped with a fine-toothed, reversible ratchet that allows a minimum working angle of only 6° with 60 teeth. This significantly reduces the required swivel arc and supports freer use of the tool. For effortless and precise bolted joints, even in hard-to-reach areas.



Reliability and flexibility.

The reversible ratchet allows quick and easy switching between right-handed and left-handed use. The square drive with a ball lock supports the safe and flexible use of different sockets for individual applications.



Clear fine adjustment.

The easy-to-use and easy-to-read double scale in N·m/ft·lb allows precise and easy target torque adjustment for reliable and accurate application.



STAHLWILLE quality.

STAHLWILLE on it, STAHLWILLE in it: Quality "Made in Germany" - Robust and durable. Made of high-quality steel with a special matt finish! The torque wrench's durable and low-maintenance design ensures a long service life and reliable performance, even in challenging conditions.

Technologies and features.



2-component handle

Our 2-component handle is non-slip and ergonomically designed. It is resistant to the most common oils, greases, fuels, brake fluids and Skydrol.

**QuickSelect**

Lightning-fast target value setting: Unlock the adjustment knob, set the value and lock the knob again.

**Spring mechanism with the "click"**

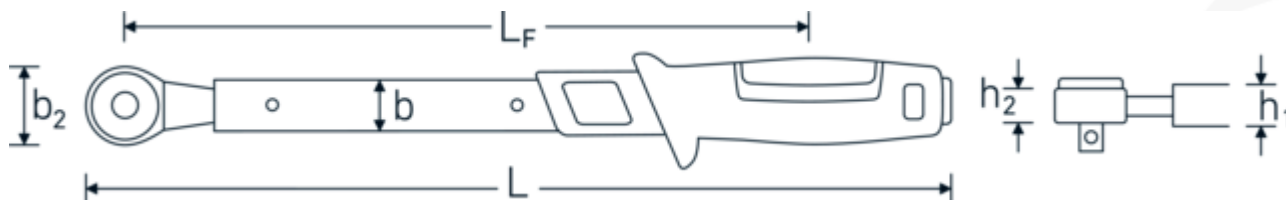
Our torque wrench uses a toggle lever as the switching mechanism. When the set torque is reached (click-type), the spring force is exceeded, causing the mechanism to slip and strike. This produces a clearly audible and perceptible "click".

**Factory calibration certificate (ISO calibration)**

Our torque tools, transducers and test equipment are delivered with a factory calibration certificate in accordance with DIN EN ISO 6789-2 and based on DKD-R 10-8 for traceability of the measuring equipment.

**2-component handle**

Our 2-component handle is non-slip and ergonomically designed. It is resistant to the most common oils, greases, fuels, brake fluids and Skydrol. The arrow markings on the handle indicate the direction of operation.

Technical Drawing.**Technical Attributes.**

Scale division ft·lb	20 ft·lb
Scale division N·m	10 N·m
Measuring range N·m	40-200 N·m
Measuring range ft·lb	30-145 ft·lb
External square drive (inch)	1/2
b1	28 mm
b2	43 mm
Fine scale division	0,5
Height mm (h1)	23 mm
Height mm (h2)	16 mm

Logistics data.

WEEE/ElektroG	nicht ear-pflichtig
Volume (packed, dm3)	0 dm3
Product no.	50021004
Weight (gross, kg)	0,000
Weight PAP (kg)	0,000
Weight PVC (kg)	0,000
GTIN	4018754348350
Country of origin AWR	GERMANY
Region of origin	Nordrhein-Westfalen
Customs tariff no.	82041100

Length mm (L)	526,7 mm	Packing standard	1
LF	464 mm	Weight	1460 g
MA N·m	40 N·m		
Nominal value N·m	200 N·m		

Variants.

Product no.	Model no. (ERP)	Description	GTIN
50021003	750NR/100	Torque wrench 750NR 20-100N·m 3/8" L. 443mm	4018754348343
50021004	750NR/200	Torque wrench 750NR 40-200N·m 1/2" L. 526,7mm	4018754348350
50021006	750NR/400	Torque wrench 750NR 80-400N·m 3/4" L. 678,7mm	4018754348374

GTIN-Code.



Images.



