



Torque wrench service MANOSKOP®

730 Fix



Product no. **96503005**
GTIN **4018754269433**
Model **730/5 FIX**



Label.

Torque wrench service MANOSKOP® 730 Fix 10-50N·m 9 x 12 mm L. 330mm

Product highlights.



Adjustment does not require disassembly.

Quick adjustment from outside, no disassembly of the torque wrench required, with two adjustment points for the maximum & minimum values.



Clear fine adjustment.

The easy-to-use and easy-to-read double scale in N·m/ft·lb allows precise and easy target torque adjustment for reliable and accurate application.

Technologies and features.



Value Lock (Tamper Resistant)

The target torque can be quickly adjusted using the adjustment knob. The knob can then be removed to prevent subsequent adjustment. The supplied locking screw and an adhesive seal provide additional protection against tampering.

**DIN EN
ISO 6789-2**

Factory calibration certificate (ISO calibration)

Our torque tools, transducers and test equipment are delivered with a factory calibration certificate in accordance with DIN EN ISO 6789-2 and based on DKD-R 10-8 for traceability of the measuring equipment.

Low-wear flexible rod system

Our torque wrench is equipped with a low-wear trigger system with a bending beam. Unlike conventional torque wrenches with coiled springs, the flexible rod is not preloaded in unloaded state, which means that the 'spring' does not need to be reset to "0" after use.


QuickRelease

The QuickRelease safety lock prevents unintentional loss of insert tools. These click securely into place and are only released again at the push of a button for a quick tool change.

2-component handle

Our 2-component handle is non-slip and ergonomically designed. It is resistant to the most common oils, greases, fuels, brake fluids and Skydrol. The arrow markings on the handle indicate the direction of operation.

Technical Drawing.

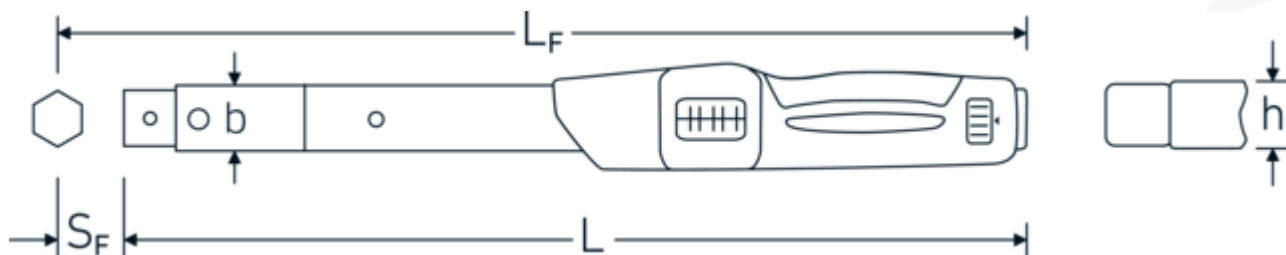

Technical Attributes.

Scale division ft·lb	1 ft·lb
Scale division N·m	5 N·m
Measuring range N·m	10-50 N·m
Measuring range ft·lb	7-37 ft·lb
Width mm (b)	28 mm
DIN	DIN EN ISO 6789-2:2017
Fine scale division	0,25 N·m
Weight with box	1632 g

Logistics data.

Depth mm (IFS)	555
Width mm (IFS)	95
Height mm (IFS)	70
WEEE/ElektroG	nicht ear-pflichtig
Length (packed, mm)	555
Width (packed, mm)	95
Height (packed, mm)	70
Volume (packed, dm ³)	3.69075 dm ³

Size	5	Product no.	96503005
Size tool holder [internal square drive]	9 x 12 mm	Weight (gross, kg)	1,420
Height mm (h)	23 mm	Weight PAP (kg)	0,095
Length mm (L)	330 mm	Weight PVC (kg)	0,000
LF	280,5 mm	GTIN	4018754269433
MA N·m	10 N·m	Country of origin AWR	GERMANY
Nominal value N·m	50 N·m	Region of origin	Nordrhein-Westfalen
SF	17,5 mm	Customs tariff no.	82041100
		Packing standard	1
		Weight	828 g

Parts list.



50183005
Torque wrench service
MANOSKOP®



81370002
Plastic box, empty



83071004
Insert for plastic box



08160030
Bit screwdriver socket



83825018
Labelling plate



19060001
Spare part

Variants.

Product no.	Model no. (ERP)	Description	GTIN
96503005	730/5 FIX	Torque wrench service MANOSKOP® 730 Fix 10-50N·m 9 x 12 mm L. 330mm	4018754269433
96503010	730/10 FIX	Torque wrench service MANOSKOP® 730 Fix 20-100N·m 9 x 12 mm L. 386mm	4018754269440
96503012	730/12 FIX	Torque wrench service MANOSKOP® 730 Fix 25-130N·m 14 x 18 mm L. 421mm	4018754269457
96503020	730/20 FIX	Torque wrench service MANOSKOP® 730 Fix 40-200N·m 14 x 18 mm L. 467mm	4018754269464

96503040	730/40 FIX	Torque wrench service MANOSKOP® 730 Fix 80-400N·m 14 x 18 mm L. 607mm	4018754269471
96503065	730/65 FIX	Torque wrench service MANOSKOP® 730 Fix 130-650N·m 14 x 18 mm L. 890mm	4018754269655
96503465	730NII/65 FIX	Torque wrench service MANOSKOP® 730 Fix 130-650N·m 22 x 28 mm L. 911mm	4018754269778
96503080	730/80 FIX	Torque wrench service MANOSKOP® 730 Fix 160-800N·m 22 x 28 mm L. 1178mm	4018754269662
96503100	730/100 FIX	Torque wrench service MANOSKOP® 730 Fix 200-1000N·m 22 x 28 mm L. 1363mm	4018754269679

GTIN-Code.

