



## StahlwilleSTABIL® 8



Art. no. 42010065  
GTIN 4018754023257  
Model 8 65




**Label.** Stl. 65 mm L.325mm

**Features.** kStahlwilleSTABIL®  
• kromlegerat stål, grönlackerade



### Technical Drawing.

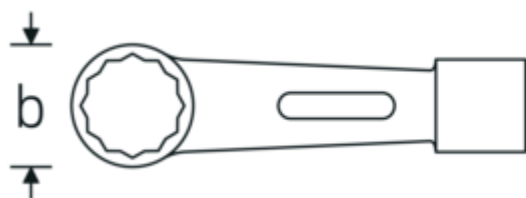

### Technical Attributes.

a	45 mm
Bredd mm (b)	90.5 mm
Längd mm (L)	325 mm
Nyckelstorlek 1 [mm]	65 mm

### Logistics data.

Djup mm (IFS)	329
Bredd mm (IFS)	92
Höjd mm (IFS)	45
Längd (packad, mm)	329

<b>Bredd (packad, mm)</b>	92
<b>Höjd (packad, mm)</b>	45
<b>Volym (förpackad, dm3)</b>	1.36206 dm3
<b>Art. no.</b>	42010065
<b>Vikt (brutto, kg)</b>	3,075
<b>Vikt PAP (kg)</b>	0,000
<b>Vikt PVC (kg)</b>	0,000
<b>GTIN</b>	4018754023257
<b>Ursprungsland AWR</b>	GERMANY
<b>Ursprungsregion</b>	Nordrhein-Westfalen
<b>WEEE/ElektroG</b>	nicht ear-pflichtig
<b>Tulltaxa nr.</b>	82041100
<b>Förpackningsstandard</b>	1
<b>Vikt (g)</b>	3209 g

## Variants.

Art. no.	Modell no. (ERP)	Beteckning	GTIN
42010032	8 32	Stl. 32 mm L.195mm	4018754023141
42010036	8 36	Stl. 36 mm L.195mm	4018754023165
42010041	8 41	Stl. 41 mm L.200mm	4018754023172
42010046	8 46	Stl. 46 mm L.250mm	4018754023189
42010050	8 50	Stl. 50 mm L.280mm	4018754023196
42010055	8 55	Stl. 55 mm L.300mm	4018754023219
42010060	8 60	Stl. 60 mm L.300mm	4018754023233
42010065	8 65	Stl. 65 mm L.325mm	4018754023257
42010070	8 70	Stl. 70 mm L.355mm	4018754023264
42010075	8 75	Stl. 75 mm L.360mm	4018754023271
42010080	8 80	Stl. 80 mm L.440mm	4018754023295
42010085	8 85	Stl. 85 mm L.440mm	4018754023318
42010090	8 90	Stl. 90 mm L.445mm	4018754023325
42010095	8 95	Stl. 95 mm L.450mm	4018754023332
42010100	8 100	Stl. 100 mm L.455mm	4018754023349
42010105	8 105	Stl. 105 mm L.460mm	4018754023356
42010110	8 110	Stl. 110 mm L.500mm	4018754023363
42010115	8 115	Stl. 115 mm L.505mm	4018754023370
42010120	8 120	Stl. 120 mm L.510mm	4018754023387

## GTIN-Code.

