



Torque wrench service MANOSKOP® (N·m)

730 Quick



Product no. **50184002**
GTIN **4018754292653**
Model **730/2 QUICK**



Label.

Torque wrench service MANOSKOP® (N·m) 730 Quick 4-20N·m 9 x 12 mm L. 179mm

Product highlights.



Adjustment does not require disassembly.

Quick adjustment from outside, no disassembly of the torque wrench required, with two adjustment points for the maximum & minimum values.



Technologies and features.



Factory calibration certificate (ISO calibration)

Our torque tools, transducers and test equipment are delivered with a factory calibration certificate in accordance with DIN EN ISO 6789-2 and based on DKD-R 10-8 for traceability of the measuring equipment.



Low-wear flexible rod system

Our torque wrench is equipped with a low-wear trigger system with a bending beam. Unlike conventional torque wrenches with coiled springs, the flexible rod is not preloaded in unloaded state, which means that the 'spring' does not need to be reset to "0" after use.



QuickRelease


The QuickRelease safety lock prevents unintentional loss of insert tools. These click securely into place and are only released again at the push of a button for a quick tool change.



2-component handle

Our 2-component handle is non-slip and ergonomically designed. It is resistant to the most common oils, greases, fuels, brake fluids and Skydrol. The arrow markings on the handle indicate the direction of operation.

Technical Drawing.

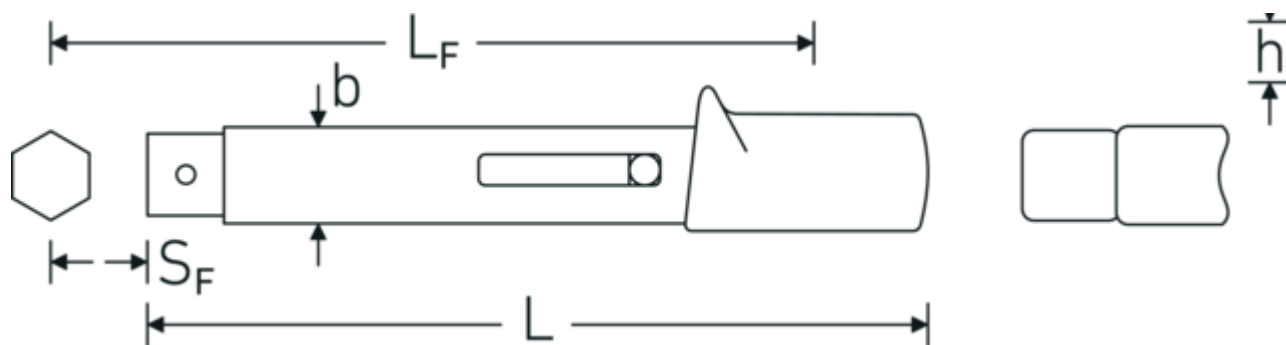

Technical Attributes.

| | |
|--|-----------|
| Scale division N·m | 0,5 N·m |
| Measuring range N·m | 4-20 N·m |
| Width mm (b) | 27.5 mm |
| Size | 2 |
| Size tool holder [internal square drive] | 9 x 12 mm |
| Height mm (h) | 23,6 mm |
| Length mm (L) | 179 mm |
| LF | 157,2 mm |
| SF | 17,5 mm |

Logistics data.

| | |
|-----------------------------------|-------------------------|
| Depth mm (IFS) | 182 |
| Width mm (IFS) | 45 |
| Height mm (IFS) | 30 |
| WEEE/ElektroG | nicht ear-pflichtig |
| Length (packed, mm) | 250 |
| Width (packed, mm) | 55 |
| Height (packed, mm) | 55 |
| Volume (packed, dm ³) | 0.75625 dm ³ |
| Product no. | 50184002 |
| Weight (gross, kg) | 0,400 |
| Weight PAP (kg) | 0,000 |
| Weight PVC (kg) | 0,066 |

| | |
|------------------------------|---------------------|
| GTIN | 4018754292653 |
| Country of origin AWR | GERMANY |
| Region of origin | Nordrhein-Westfalen |
| Customs tariff no. | 82041100 |
| Packing standard | 1 |
| Weight | 315 g |

Variants.

| Product no. | Model no. (ERP) | Description | GTIN |
|-------------|------------------|--|---------------|
| 91381054 | 730/2-1 BW QUICK | Torque wrench service MANOSKOP® (N·m) 730 Quick 2-10N·m 9 x 12 mm L. 179mm | 4018754320325 |
| 50184001 | 730/2-1 QUICK | Torque wrench service MANOSKOP® (N·m) 730 Quick 2-10N·m 9 x 12 mm L. 179mm | 4018754359035 |
| 50184002 | 730/2 QUICK | Torque wrench service MANOSKOP® (N·m) 730 Quick 4-20N·m 9 x 12 mm L. 179mm | 4018754292653 |
| 50184004 | 730/4 QUICK | Torque wrench service MANOSKOP® (N·m) 730 Quick 8-40N·m 9 x 12 mm L. 223mm | 4018754292660 |

GTIN-Code.

