



Combination wrench OPEN BOX, metric

OPEN BOX 16



Product no. **40093232**
GTIN **4018754019083**
Model **OPEN BOX 16 3,2**



Label.

Combination wrench Wrench size 3.2 mm L.75mm

Product highlights.



PRODUCT IMAGE
IN PROGRESS

Optimum power transmission.

Every wrench guarantees consistently excellent quality due to minimal manufacturing tolerances and highly reproducible precision. The jaws and ring always sit firmly on the bolt, thus ensuring optimal power transmission.



PRODUCT IMAGE
IN PROGRESS

Non-slip surface.

STHLWILLE wrenches have a high-quality surface finish with good grip, making it possible to work safely and efficiently, even with greasy hands. The non-slip property improves control during handling.



A solution for every situation.

Our combination wrenches are available in different versions (metric, imperial, long, with Spline-Drive profile) and as sets in textile bags, roll-up tool bags or TCS inserts.



PRODUCT IMAGE
IN PROGRESS

Outstanding craftsmanship.

The wrench is made from high-quality forged chrome alloy steel, making it extremely robust and durable, even during continuous use. It also has a corrosion-resistant chrome-plated finish.

Technologies and features.



Double-T profile

Our combination and ring wrenches have an additional recess in the middle of the tool. Similar to the principle of a double-T beam, this provides a tremendous load capacity and maximum strength whilst reducing weight.



Thin-walled rings


The thin wall diameter of our rings makes it easier to work in confined spaces. The ring sides are taller than standard nuts, which prevents jamming.



Offset Shaft Design

Our wrenches are specially designed with additional reinforcement in the load zones where the greatest amount of force is transmitted - namely where the jaw meets the shank - in order to prevent deformation.

Technical Drawing.

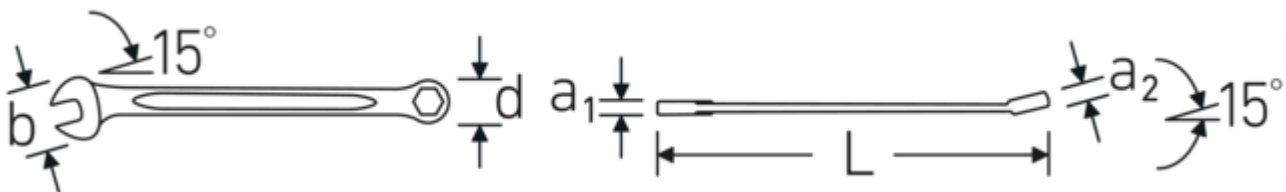

Technical Attributes.

| | |
|---------------------|----------|
| a1 | 3 mm |
| a2 | 3,2 mm |
| Width mm (b) | 10 mm |
| d | 6,6 mm |
| DIN | ISO 3318 |
| Length mm (L) | 75 mm |
| Jaw angle | 15 ° |
| Wrench width 1 [mm] | 3.2 mm |
| Ring position | 15 ° |
| Wrench width 2 [mm] | 3.2 mm |

Logistics data.

| | |
|-----------------------------------|-------------------------|
| Depth mm (IFS) | 76 |
| Width mm (IFS) | 10 |
| Height mm (IFS) | 4 |
| Length (packed, mm) | 80 |
| Width (packed, mm) | 23 |
| Height (packed, mm) | 12 |
| Volume (packed, dm ³) | 0.02208 dm ³ |
| Product no. | 40093232 |
| Weight (gross, kg) | 0,063 |
| Weight PAP (kg) | 0,000 |
| Weight PVC (kg) | 0,002 |

| | |
|------------------------------|---------------------|
| GTIN | 4018754019083 |
| Country of origin AWR | GERMANY |
| Region of origin | Nordrhein-Westfalen |
| WEEE/ElektroG | nicht ear-pflichtig |
| Customs tariff no. | 82041100 |
| Packing standard | 10 |
| Weight | 6 g |

Variants.

| Product no. | Model no. (ERP) | Description | GTIN |
|-------------|-----------------|--|---------------|
| 40093232 | OPEN BOX 16 3,2 | Combination wrench Wrench size 3.2 mm L.75mm | 4018754019083 |
| 40093535 | OPEN BOX 16 3,5 | Combination wrench Wrench size 3.5 mm L.75mm | 4018754019090 |
| 40094040 | OPEN BOX 16 4 | Combination wrench Wrench size 4 mm L.85mm | 4018754019106 |
| 40094545 | OPEN BOX 16 4,5 | Combination wrench Wrench size 4.5 mm L.85mm | 4018754019113 |
| 40095050 | OPEN BOX 16 5 | Combination wrench Wrench size 5 mm L.95mm | 4018754019120 |

GTIN-Code.

