



## Flex sockets 1/4"

402aSP

Product no. 01542020  
GTIN 4018754170883  
Model 402ASP 10 =5/16



Label. 1/4 " Flex socket L.38mm


## Technologies and features.



### High Performance Quality (HPQ®)

Our HPQ® tool is made of wear-resistant high-performance steel, yet is thin-walled and lightweight. It withstands high torques and is ideal for work in confined spaces such as turbines.

## Technical Drawing.

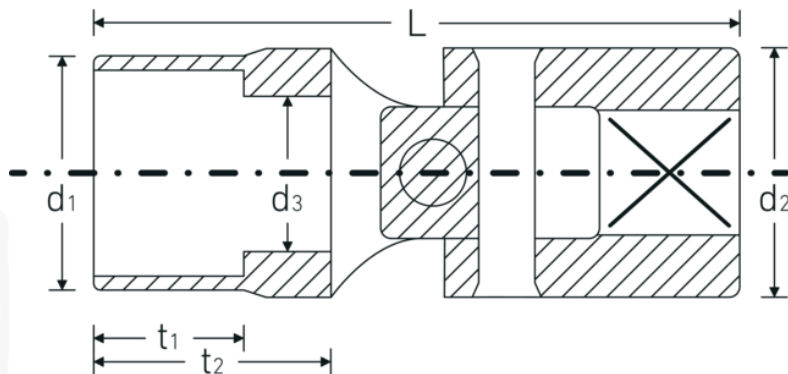

## Technical Attributes.

Drive profile	Spline-Drive
Internal square drive (inch)	1/4 "
d1	11,6 mm
d2	12,7 mm
d3	7,1 mm
Size of output profile	10
Length mm (L)	38 mm
Wrench size [inch]	5/16 "
t1	8 mm
t2	13 mm

## Logistics data.

Depth mm (IFS)	38
Width mm (IFS)	14
Height mm (IFS)	14
Length (packed, mm)	70
Width (packed, mm)	50
Height (packed, mm)	14
Volume (packed, dm3)	0.049 dm3
Product no.	01542020
Weight (gross, kg)	0,094
Weight PAP (kg)	0,000
Weight PVC (kg)	0,002
GTIN	4018754170883
Country of origin	GERMANY
Region of origin	Nordrhein-Westfalen
WEEE/ElektroG	nicht ear-pflichtig
Customs tariff no.	82042000
Packing standard	5
Weight	18 g

## Variants.

Product no.	Model no. (ERP)	Description	GTIN
01542016	402ASP 8 =1/4	1/4 " Flex socket L.32mm	4018754170876
01542020	402ASP 10 =5/16	1/4 " Flex socket L.38mm	4018754170883

## GTIN-Code.



