

Electronic torque wrench SENSOTORK®

701/2



Product no. **96504502**
GTIN **4018754243693**
Model **701/2**



Label.

Electronic torque wrench SENSOTORK® Model 701/2 Measuring r. 1-20N·m Drive 1/4 L. 210mm



Product highlights.





Comprehensive documentation.

Our electromechanical torque wrenches can be documented. They can be easily configured and programmed using the SensoMaster software. This means that all data can be read out, stored and subjected to further processing on the PC for better monitoring and optimization of the work processes. The digital measurement also allows the actual torque which has been applied (actual value) to be specified after triggering, as well as the target value.

Technologies and features.



QuickRelease

The QuickRelease safety lock prevents unintentional loss of insert tools. These click securely into place and are only released again at the push of a button for a quick tool change.



2-component handle

Our 2-component handle is non-slip and ergonomically designed. It is resistant to the most common oils, greases, fuels, brake fluids and Skydrol. The arrow markings on the handle indicate the direction of operation.



Fine-tooth ratchet mechanism


Our fine-tooth ratchets with 80 teeth re-engage after just 4.5° for maximum precision in confined spaces. Eight pairs of parallel teeth simultaneously ensure maximum load-bearing capacity and particularly smooth running, even at high torques.



Factory calibration certificate (ISO calibration)

Our torque tools, transducers and test equipment are delivered with a factory calibration certificate in accordance with DIN EN ISO 6789-2 and based on DKD-R 10-8 for traceability of the measuring equipment.

Technical Drawing.

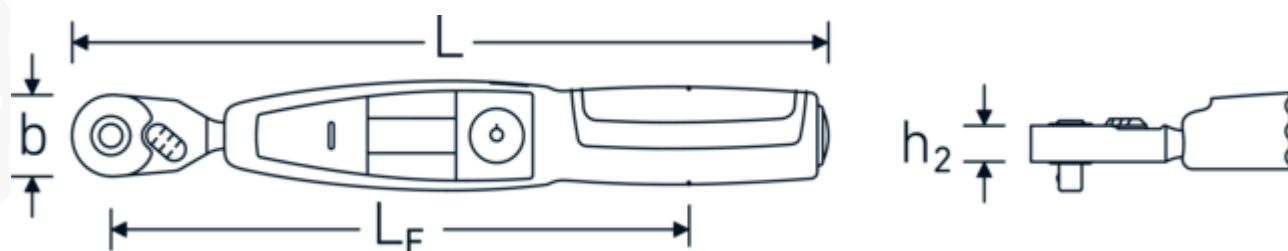

Technical Attributes.

Scale division ft-lb	0,7-15 ft-lb
Scale division in-lb	9-180 in-lb
Measuring range N·m	1-20 N·m
Measuring range cN·m	100-2000 cN·m
External square drive (inch)	1/4
Battery type	Lithium-Batterie 3,6 V, Typ 14500
Width mm (b)	22,6 mm
DIN	DIN EN ISO 6789-2:2017
Weight with box	710 g
Height mm (h1)	26 mm
Height mm (h2)	10 mm
Length mm (L)	210 mm
LF	160 mm
MA N·m	1 N·m
Nominal value N·m	20 N·m

Logistics data.

Depth mm (IFS)	325
Width mm (IFS)	135
Height mm (IFS)	60
Length (packed, mm)	325
Width (packed, mm)	135
Height (packed, mm)	60
Volume (packed, dm ³)	2.6325 dm ³
Product no.	96504502
Weight (gross, kg)	0,725
Weight PAP (kg)	0,080
Weight PVC (kg)	0,000
GTIN	4018754243693
Country of origin	GERMANY
Region of origin	Nordrhein-Westfalen
WEEE/ElektroG	Kleingeräte B2C
Customs tariff no.	82041100
Packing standard	1
Weight	145 g

Variants.

Product no.	Model no. (ERP)	Description	GTIN
50450002	701/2	Electronic torque wrench SENSOTORK® Model 701/2 Measuring r. 1-20N·m Drive 1/4 L. 210mm	4018754243679
96504502	701/2	Electronic torque wrench SENSOTORK® Model 701/2 Measuring r. 1-20N·m Drive 1/4 L. 210mm	4018754243693
96504602	701/2 NO BATTERY	Electronic torque wrench SENSOTORK® Model 701/2 Measuring r. 1-20N·m Drive 1/4 L. 210mm	4018754280919

GTIN-Code.



Spare parts/spare part for.



59220007
Lithium-ion battery

Images.

