



Double ended ring wrenches i.TCS inlay

TCS OPEN RING 24/7 8x10-19x22



Product no. **96838758**
GTIN **4018754163649**
Model **OPEN RING TCS 24/7**



Label. Double ended ring wrenches i.TCS inlay TCS OPEN RING 24/7 8x10-19x22 7

Properties.

- **metric, differing** end sizes
- cranked 10°
- with hex
- DIN 3118/ISO 3318
- durable, slim and lightweight design
- high flexural strength due to double-T profile
- STAHLWILLE's rounded finish ensures a non-slip, pleasant feel
- drop-forged, hardened, and cooled in an oil bath
- Chrome Alloy Steel, chrome-plated
- safely integrated in the modular Tool Control System (TCS)

Contains 7-pieces:

7 double-ended open-ring wrenches, angled **No. 24**: 8 x 10; 10 x 11; 11 x 13; 12 x 14; 14 x 17; 17 x 19; 19 x 22 mm

Benefits.

Premium quality double-ended open ring wrenches for working on threaded studs or long bolts, for example.

In the modular Tool Control System (TCS) tool inlays - an intelligent storage solution for tool and workshop trolleys.

In the modular Tool Control System (TCS) tool inserts - an intelligent storage solution for tool and workshop trolleys.

The distinctive STAHLWILLE rounded finish ensures the wrench is comfortable to hold and is easy to grip, ensuring safe working, even with oily hands.

The distinctive STAHLWILLE rounded finish gives the wrench a non-slip and pleasant feel for safe working, even with oil-smearred hands.

Product highlights.



Order and check.

The set is securely organized in a STAHLWILLE TCS foam inlays. These durable inlays are chemical-resistant and have precise recesses for each tool. The eye-catching yellow underside of the TCS inlays serves as a signal surface to enable quick checking of the set's completeness.

Technologies and features.



Double-T profile

Our ring, open-ended and combination wrenches have an additional recess in the middle of the tool. Similar to the principle of a double-T beam, this provides a tremendous load capacity and maximum strength whilst reducing weight.



Anti-Slip-Drive

The special AS-Drive profile makes high force transmission to the flats of bolts and nuts possible without damaging them. This also prevents stripping of the bolt head.



Tool Control System


The intelligent modular inlay system protects and organizes the tools in tool boxes, tool trolleys and workbenches. Two-color foam inlays make checking the completeness of the tools quick and easy.



Thin-walled rings

The thin-walled diameter of our rings makes it easier to work in confined spaces. The ring wall is deeper than standard nuts, which prevents jamming.

Technical drawing.

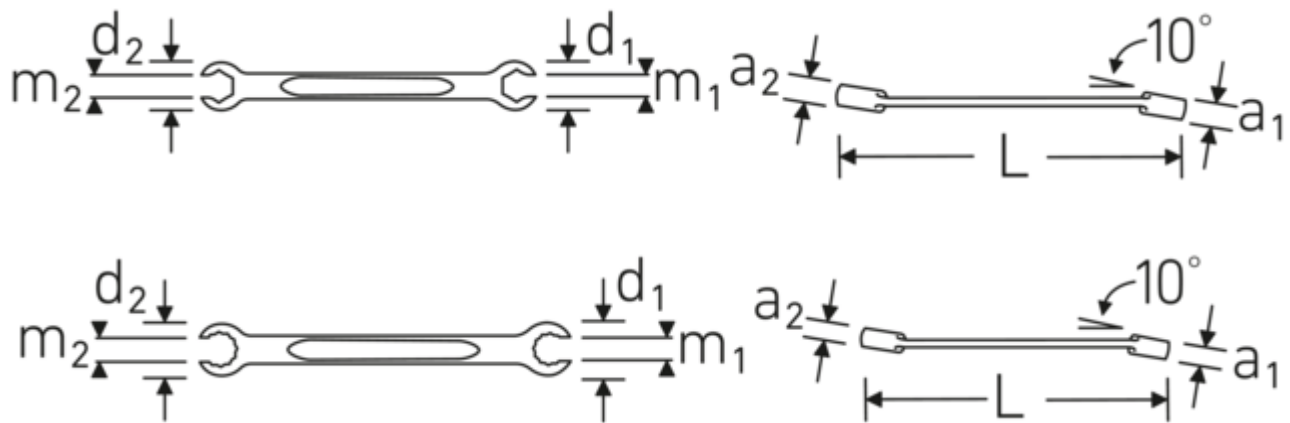

Technical attributes.

| | |
|-----------------|---|
| Number of tools | 7 |
| Range | 8x10-19x22 |
| Width mm (b) | 175 mm |
| DIN | DIN 3118 / ISO 3318 |
| Height mm (h) | 35 mm |
| Contents | 8 x 10; 10 x 11; 11 x 13; 12 x 14; 14 x 17; 17 x 19; 19 x 22 mm |
| Length mm (L) | 350 mm |
| Alloy | Chrome Alloy Steel |
| Surface | chrome-plated |

Logistics data.

| | |
|------------------------|---------------------|
| Depth mm (IFS) | 365 |
| Width mm (IFS) | 185 |
| Height mm (IFS) | 80 |
| WEEE/ElektroG | nicht ear-pflichtig |
| Length (packaged, mm) | 365 |
| Width (packaged, mm) | 185 |
| Height (packaging, mm) | 80 |
| Volume (packaged, dm3) | 5.402 dm3 |
| Product no. | 96838758 |
| Weight (gross, kg) | 1,124 |
| Weight PAP (kg) | 0,138 |
| Weight PVC (kg) | 0,000 |
| GTIN | 4018754163649 |
| Country of origin AWR | GERMANY |
| Region of origin | Nordrhein-Westfalen |
| Customs tariff no. | 82041100 |
| Packing standard | 1 |
| Weight (g) | 780 g |

Parts list.



41081922
Double-ended opening wrench, angled



41081719
Double-ended opening wrench, angled



41081417
Double-ended opening wrench, angled



41081214
Double-ended opening wrench, angled



41081113
Double-ended opening wrench, angled



41081011
Double-ended opening wrench, angled



41080810
Double-ended opening wrench, angled

Variants.

| Product no. | Model No. (ERP) | Description | GTIN |
|-------------|-----------------------|---|---------------|
| 96838758 | OPEN RING TCS 24/7 | Double ended ring wrenches i.TCS inlay TCS OPEN RING 24/7 8x10-19x22 7 | 4018754163649 |

GTIN.



4 018754 163649

STAHLWILLE Eduard Wille GmbH

Lindenallee 27 · 42349 Wuppertal · Germany · Phone: +49 202 4791-0

info@stahlwille.de · www.stahlwille.com

© STAHLWILLE Eduard Wille GmbH, Wuppertal