



Pullers, three-armed

11351

Product no. **71035101**
GTIN **4018754342051**
Model **11351/1**

Label.

Puller Clamping w.160mm x Clamping depth130mm

Properties.

- three-armed
- with self-centring puller arms
- for gears, ball bearings, pulleys and similar parts from a shaft or axle
- double-sided use of the extractor hooks: narrow arm end (20 mm) for narrow installation spaces, wide arm end (24 mm) with slot (8 mm) for pulling off washers or gear wheels with the aid of 8 mm screws
- nitrided spindle, no lubrication required, maintenance-free
- zinc plated

Benefits.

For quick and reliable removal of gears, ball bearings, pulleys and for extracting the outer rings of ball bearings and bushings from drilled holes.

Automatic pressure of the arms under load makes application easier.

The nitrided surface of the spindle allows it to move easily so it does not require additional lubrication.

The arm ends have a narrow and wide design and can therefore be used on both sides.


Outstanding flexural strength thanks to legs with precisely manufactured profiles and smooth, milled guides.

Product highlights.



Reliable sliding properties.

The high-quality tempered and specially coated pressure spindle has particularly good sliding properties in the thread, is maintenance-free and does not require oiling.



Adapted access geometry.

Heavy-duty puller hooks made of oil-hardened Chrome Alloy Steel with special access geometry for tight spaces. Custom radii for shafts and axes.




Protection against damage.

The centering tip is freely rotating - to protect the shafts from damage.

For increased safety.

Thoughtfully designed, die-forged and precisely machined, hardened and tempered on state-of-the-art machines - the STAHLWILLE puller range offers numerous products for a wide range of applications. For example, terminal pullers, pullers for ball joints, counter stays or ball joint extractors - always in premium quality.

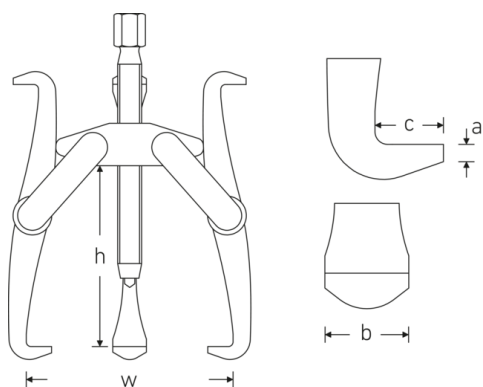**Technical drawing.****Technical attributes.**

External hex drive (mm)	19 mm
Thickness of hook base tip mm (a)	3 mm
Hook base width mm (b)	24 mm
Hook foot depth mm (c)	12 mm
Size	1
Number of hooks	3
max. load	7,5 t
Clamping depth (h) mm	130 mm
Spindle thread size	M18 x 1,5 x 170
Span mm (w)	160 mm

Logistics data.

Depth mm (IFS)	215
Width mm (IFS)	160
Height mm (IFS)	140
WEEE/ElektroG	nicht ear-pflichtig
Length (packaged, mm)	225
Width (packaged, mm)	175
Height (packaging, mm)	153
Volume (packaged, dm3)	6.024375 dm3
Product no.	71035101
Weight (gross, kg)	2,574
Weight PAP (kg)	0,178
Weight PVC (kg)	0,000
GTIN	4018754342051
Country of origin AWR	GERMANY
Region of origin	Nordrhein-Westfalen
Customs tariff no.	82055980
Packing standard	1

Weight (g)

2600 g

Variants.

Product no.	Model No. (ERP)	Description	GTIN
71035101	11351/1	Puller Clamping w.160mm x Clamping depth130mm	4018754342051
71035102	11351/2	Puller Clamping w.220mm x Clamping depth170mm	4018754342068

GTIN.



Spare part(s), spare part(s) for.



79281006
Puller spindle

Images.





STAHLWILLE Eduard Wille GmbH

Lindenallee 27 · 42349 Wuppertal · Germany · Phone: +49 202 4791-0

info@stahlwille.de · www.stahlwille.com

© STAHLWILLE Eduard Wille GmbH, Wuppertal