

Torque wrench service MANOSKOP®

730 Fix



Product no. **96503010**
GTIN **4018754269440**
Model **730/10 FIX**



Label.


Torque wrench service MANOSKOP® 730 Fix 20-100N·m 9 x 12 mm L. 386mm

Product highlights.



Adjustment does not require disassembly.

Quick adjustment from outside, no disassembly of the torque wrench required, with 2 adjustment points for the maximum & minimum values.



Clear fine adjustment.

The easy-to-use and easy-to-read double scale in N·m/ft·lb allows precise and easy target torque adjustment for reliable and accurate application.

Technologies and features.



QuickRelease

The QuickRelease safety lock prevents unintentional loss of insert tools. These click securely into place, and are only released again at the push of a button for a quick tool change. In transducers: The QuickRelease safety lock helps you to quickly mount and change transducers. The transducers lock into the calibration system and only unlock again at the push of the buttons.



QuickSelect

Lightning-fast target value setting: Unlock the adjustment knob, set the value, and lock the knob again.



Low-wear bending beam system

Our torque wrench is equipped with a low-wear release system with a bending beam. Unlike conventional torque wrenches with coiled springs, the bending beam is not subjected to any load until the tool is in operation, which means that the spring does not need to be reset to '0' after use.



Adjustment Lock

The target torque can be quickly adjusted using the adjustment knob. The knob can then be removed to prevent subsequent adjustment. The supplied locking screw (TORX® Tamper resistant) and an adhesive seal provide additional protection against tampering.



2-component handle


Our 2-component handle is non-slip and ergonomically designed. It is resistant to the most common oils, greases, fuels, brake fluids, and Skydrol. The arrow markings on the handle indicate the direction of operation.



DIN EN ISO 6789-2

Our torque wrenches and torque screwdrivers are professionally calibrated in accordance with DIN EN ISO 6789-2 and delivered with a corresponding calibration certificate. We also calibrate angle-controlled torque wrenches in accordance with VDI 2648-2. This ensures the accuracy and traceability of our tools.

Technical drawing.

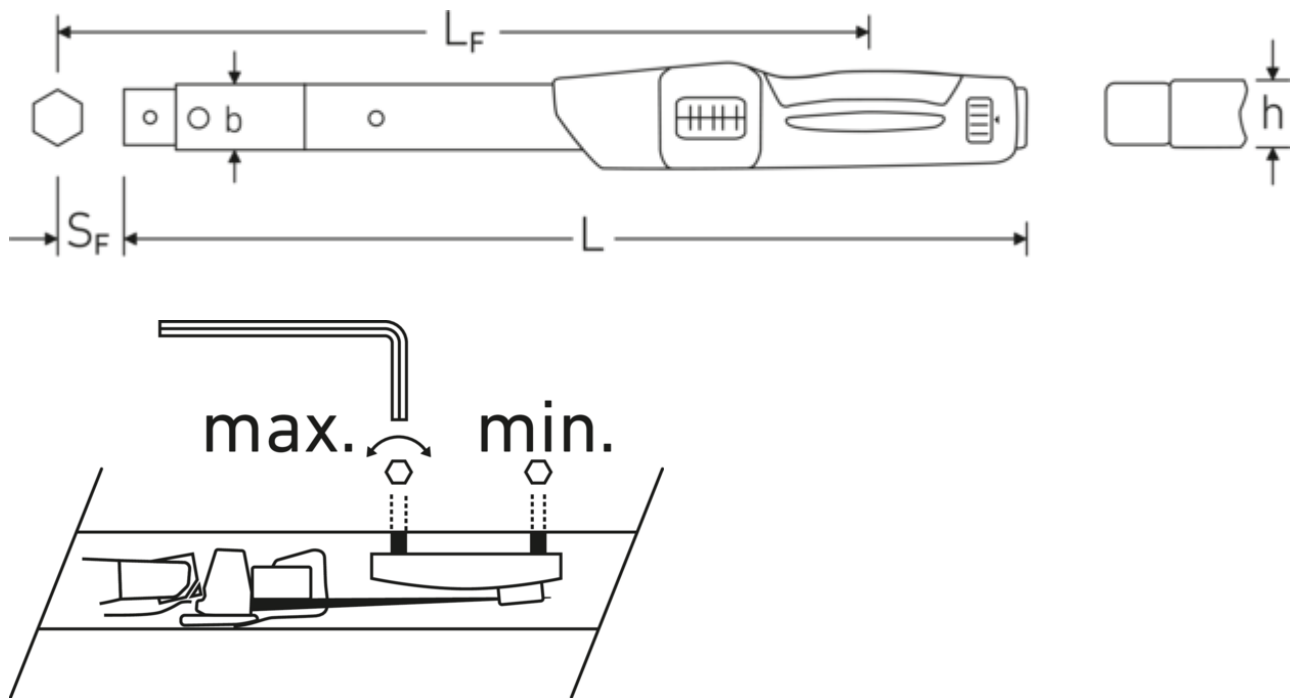

Technical attributes.

| | |
|------------------------------------|------------------------|
| Scale division N·m | 10 N·m |
| Scale division ft·lb | 2,5 ft·lb |
| Measuring range N·m | 20-100 N·m |
| Measuring range ft·lb | 15-75 ft·lb |
| Width mm (b) | 28 mm |
| DIN | DIN EN ISO 6789-2:2017 |
| Fine scale division | 0,5 N·m |
| Weight with box | 1788 g |
| Size | 10 |
| Tool holder size [internal square] | 9 x 12 mm |
| Height mm (h) | 23 mm |
| Length mm (L) | 386 mm |
| LF | 336 mm |
| MA N·m | 20 N·m |
| Nominal value N·m | 100 N·m |
| SF | 17,5 mm |

Logistics data.

| | |
|-------------------------------------|-------------------------|
| Depth mm (IFS) | 560 |
| Width mm (IFS) | 92 |
| Height mm (IFS) | 71 |
| WEEE/ElektroG | nicht ear-pflichtig |
| Length (packaged, mm) | 560 |
| Width (packaged, mm) | 92 |
| Height (packaging, mm) | 71 |
| Volume (packaged, dm ³) | 3.65792 dm ³ |
| Product no. | 96503010 |
| Weight (gross, kg) | 1,570 |
| Weight PAP (kg) | 0,095 |
| Weight PVC (kg) | 0,000 |
| GTIN | 4018754269440 |
| Country of origin AWR | GERMANY |
| Region of origin | Nordrhein-Westfalen |
| Customs tariff no. | 82041100 |
| Packing standard | 1 |
| Weight (g) | 986 g |

Parts list.



83825018
Labelling plate



81370002
Plastic box, empty



50183010
Torque wrench service
MANOSKOP®



19060001
Spare part



08160030
Screwdriver socket

Variants.

| Product no. | Model No. (ERP) | Description | GTIN |
|-------------|-----------------|---|---------------|
| 96503005 | 730/5 FIX | Torque wrench service MANOSKOP® 730 Fix 10-50N·m 9 x 12 mm L. 330mm | 4018754269433 |
| 96503010 | 730/10 FIX | Torque wrench service MANOSKOP® 730 Fix 20-100N·m 9 x 12 mm L. 386mm | 4018754269440 |
| 96503012 | 730/12 FIX | Torque wrench service MANOSKOP® 730 Fix 25-130N·m 14 x 18 mm L. 421mm | 4018754269457 |
| 96503020 | 730/20 FIX | Torque wrench service MANOSKOP® 730 Fix 40-200N·m 14 x 18 mm L. 467mm | 4018754269464 |
| 96503040 | 730/40 FIX | Torque wrench service MANOSKOP® 730 Fix 80-400N·m 14 x 18 mm L. 607mm | 4018754269471 |
| 96503065 | 730/65 FIX | Torque wrench service MANOSKOP® 730 Fix 130-650N·m 14 x 18 mm L. 890mm | 4018754269655 |
| 96503465 | 730NII/65 FIX | Torque wrench service MANOSKOP® 730 Fix 130-650N·m 22 x 28 mm L. 911mm | 4018754269778 |
| 96503080 | 730/80 FIX | Torque wrench service MANOSKOP® 730 Fix 160-800N·m 22 x 28 mm L. 1178mm | 4018754269662 |

96503100 730/100 FIX

Torque wrench service MANOSKOP®
730 Fix 200-1000N·m 22 x 28 mm L.
1363mm

4018754269679

GTIN.



Accessories (for).



81370002
Plastic box, empty

STAHLWILLE Eduard Wille GmbH

Lindenallee 27 · 42349 Wuppertal · Germany · Phone: +49 202 4791-0

info@stahlwille.de · www.stahlwille.com

© STAHLWILLE Eduard Wille GmbH, Wuppertal