

Torque wrench service MANOSKOP® (ft·lb/in·lb)

730Na

Product no. **50581020**
GTIN **4018754139590**
Model **730NA/20**



Label.

Torque wrench service MANOSKOP® 730Na 350-1800in lb 14 x 18 mm L. 467mm

Product highlights.



Adjustment does not require disassembly.

Quick adjustment from outside, no disassembly of the torque wrench required, with 2 adjustment points for the maximum & minimum values.



Clicking dual stop signal.

When the target torque is reached, MANOSKOP® 730N provides a noticeable tactile dual stop signal.



Clear fine adjustment.

The easy-to-use and easy-to-read double scale in N·m/ft·lb allows precise and easy target torque adjustment for reliable and accurate application.

Technologies and features.



QuickRelease

The QuickRelease safety lock prevents unintentional loss of insert tools. These click securely into place, and are only released again at the push of a button for a quick tool change. In transducers: The QuickRelease safety lock helps you to quickly mount and change transducers. The transducers lock into the calibration system and only unlock again at the push of the buttons.



QuickSelect

Lightning-fast target value setting: Unlock the adjustment knob, set the value, and lock the knob again.



Low-wear bending beam system

Our torque wrench is equipped with a low-wear release system with a bending beam. Unlike conventional torque wrenches with coiled springs, the bending beam is not subjected to any load until the tool is in operation, which means that the spring does not need to be reset to '0' after use.



2-component handle


Our 2-component handle is non-slip and ergonomically designed. It is resistant to the most common oils, greases, fuels, brake fluids, and Skydrol. The arrow markings on the handle indicate the direction of operation.



DIN EN ISO 6789-2

Our torque wrenches and torque screwdrivers are professionally calibrated in accordance with DIN EN ISO 6789-2 and delivered with a corresponding calibration certificate. We also calibrate angle-controlled torque wrenches in accordance with VDI 2648-2. This ensures the accuracy and traceability of our tools.

Technical drawing.

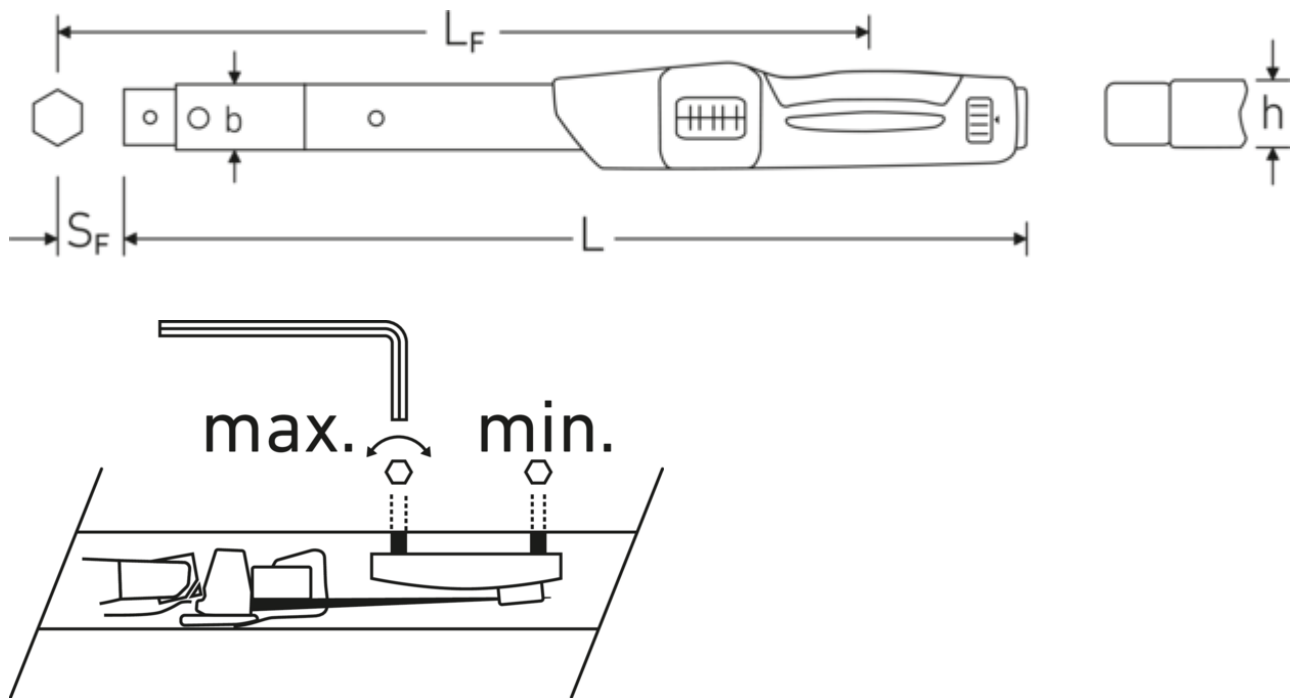

Technical attributes.

Scale division in-lb	100 in·lb
Scale division ft-lb	5 ft·lb
Measuring range ft-lb	30-150 ft·lb
Measuring range in-lb	350-1800 in·lb
Width mm (b)	28 mm
DIN	DIN EN ISO 6789-2:2017
Fine scale division	10 in·lb
Size	a/20
Tool holder size [internal square]	14 x 18 mm
Height mm (h)	23 mm
Length mm (L)	467 mm
LF	424,5 mm
SF	25 mm

Logistics data.

Depth mm (IFS)	495
Width mm (IFS)	52
Height mm (IFS)	52
WEEE/ElektroG	nicht ear-pflichtig
Length (packaged, mm)	495
Width (packaged, mm)	52
Height (packaging, mm)	52
Volume (packaged, dm ³)	1.33848 dm ³
Product no.	50581020
Weight (gross, kg)	1,540
Weight PAP (kg)	0,000
Weight PVC (kg)	0,110
GTIN	4018754139590
Country of origin AWR	GERMANY
Region of origin	Nordrhein-Westfalen
Customs tariff no.	82041100
Packing standard	1
Weight (g)	1264 g

Variants.

Product no.	Model No. (ERP)	Description	GTIN
50181002	730N/2	Torque wrench service MANOSKOP® 730N/2 20-180in lb 9 x 12 mm L. 275mm	4018754170777
50581002	730NA/2	Torque wrench service MANOSKOP® 730Na/2 20-180in lb 9 x 12 mm L. 275mm	4018754170784
50581102	730NA/2 40-180 INLB	Torque wrench service MANOSKOP® 730Na 40-180in lb 9 x 12 mm L. 275mm	4018754295326
50581005	730NA/5	Torque wrench service MANOSKOP® 730Na 90-450in lb 9 x 12 mm L. 330mm	4018754139569
50581010	730NA/10	Torque wrench service MANOSKOP® 730Na 180-900in lb 9 x 12 mm L. 386mm	4018754139576
50581020	730NA/20	Torque wrench service MANOSKOP® 730Na 350-1800in lb 14 x 18 mm L. 467mm	4018754139590
50581040	730NA/40	Torque wrench service MANOSKOP® 730Na 800-3600in lb 14 x 18 mm L. 607mm	4018754164004

GTIN.



STAHLWILLE Eduard Wille GmbH

Lindenallee 27 · 42349 Wuppertal · Germany · Phone: +49 202 4791-0

info@stahlwille.de · www.stahlwille.com

© STAHLWILLE Eduard Wille GmbH, Wuppertal