



Double ended ring spanners i.TCS inlay

TCS OPEN RING 24/7 8x10-19x22

Product no. **96838758**
GTIN **4018754163649**
Model **OPEN RING TCS 24/7**



Label. Double ended ring spanners i.TCS inlay TCS OPEN RING 24/7 8x10-19x22 7 pcs.

Properties.

- **metric, differing** end sizes
- cranked 10°
- with hex
- DIN 3118/ISO 3318
- durable, slim and lightweight design
- high flexural strength due to double-T profile
- STAHLWILLE's rounded finish ensures a non-slip, pleasant feel
- drop-forged, hardened, and cooled in an oil bath
- Chrome Alloy Steel, chrome-plated
- safely integrated in the modular Tool Control System (TCS)

Contains 7-pieces:

7 double-ended open-ring spanners, angled **No. 24**: 8 x 10; 10 x 11; 11 x 13; 12 x 14; 14 x 17; 17 x 19; 19 x 22 mm

Benefits.

Premium quality double-ended open ring spanners for working on threaded studs or long bolts, for example.

In the modular Tool Control System (TCS) tool inlays - an intelligent storage solution for tool and workshop trolleys.

In the modular Tool Control System (TCS) tool inserts - an intelligent storage solution for tool and workshop trolleys.

The distinctive STAHLWILLE rounded finish ensures the spanner is comfortable to hold and is easy to grip, ensuring safe working, even with oily hands.

The distinctive STAHLWILLE rounded finish gives the spanner a non-slip and pleasant feel for safe working, even with oil-smeared hands.

Product highlights.



PRODUCT IMAGE
IN PROGRESS

Order and check.

The set is securely organised in a STAHLWILLE TCS foam inlays. These durable inlays are chemical-resistant and have precise recesses for each tool. The eye-catching yellow underside of the TCS inlays serves as a signal surface to enable quick checking of the set's completeness.

Technologies and features.



Double-T profile

Our ring, open-ended and combination spanners have an additional recess in the middle of the tool. Similar to the principle of a double-T beam, this provides a tremendous load capacity and maximum strength whilst reducing weight.



Anti-Slip-Drive

The special AS-Drive profile makes high force transmission to the flats of bolts and nuts possible without damaging them. This also prevents stripping of the screw head.



Tool Control System


The intelligent modular inlay system protects and organises the tools in tool boxes, tool trolleys and workbenches. Two-colour foam inlays make checking the completeness of the tools quick and easy.



Thin-walled rings

The thin-walled diameter of our rings makes it easier to work in confined spaces. The ring wall is deeper than standard nuts, which prevents jamming.

Technical drawing.

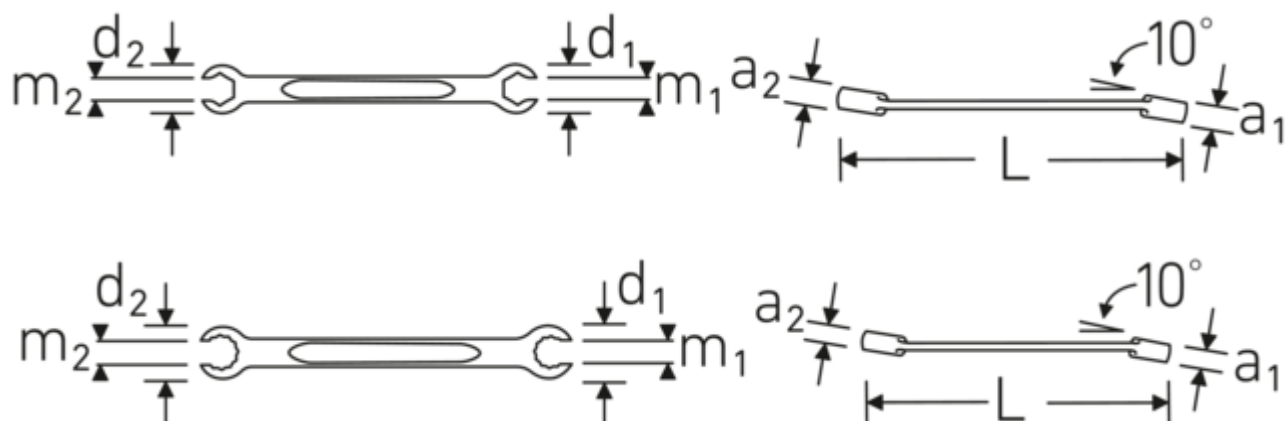

Technical attributes.

Number of tools	7 pcs.
Range	8x10-19x22
Width mm (b)	175 mm
DIN	DIN 3118 / ISO 3318
Height mm (h)	35 mm
Contents	8 x 10; 10 x 11; 11 x 13; 12 x 14; 14 x 17; 17 x 19; 19 x 22 mm
Length mm (L)	350 mm
Alloy	Chrome Alloy Steel
Surface	chrome-plated

Logistics data.

Depth mm (IFS)	365
Width mm (IFS)	185
Height mm (IFS)	80
WEEE/ElektroG	nicht ear-pflichtig
Length (packaged, mm)	365
Width (packaged, mm)	185
Height (packaging, mm)	80
Volume (packaged, dm3)	5.402 dm3
Product no.	96838758
Weight (gross, kg)	1,124
Weight PAP (kg)	0,138
Weight PVC (kg)	0,000
GTIN	4018754163649
Country of origin AWR	GERMANY
Region of origin	Nordrhein-Westfalen
Customs tariff no.	82041100
Packing standard	1
Weight (g)	780 g

Parts list.



41081922
Double-ended open-
ring spanner, angled



41081719
Double-ended open-
ring spanner, angled



41081417
Double-ended open-
ring spanner, angled



41081214
Double-ended open-
ring spanner, angled



41081113
Double-ended open-
ring spanner, angled



41081011
Double-ended open-
ring spanner, angled



41080810
Double-ended open-
ring spanner, angled

Variants.

Product no.	Model No. (ERP)	Description	GTIN
96838758	OPEN RING TCS 24/7	Double ended ring spanners i.TCS inlay TCS OPEN RING 24/7 8x10-19x22 7 pcs.	4018754163649

GTIN.



STAHLWILLE Eduard Wille GmbH

Lindenallee 27 · 42349 Wuppertal · Germany · Phone: +49 202 4791-0

info@stahlwille.de · www.stahlwille.com

© STAHLWILLE Eduard Wille GmbH, Wuppertal