



Double ended ring wrenches i.TCS inlay

TCS StahlwilleSTABIL® 20/8 6x7-19x22MF

Product no. **96830356**
GTIN **4018754175277**
Model **StahlwilleSTABIL® TCS 20/8**



Label.

Double ended ring wrenches i.TCS inlay TCS StahlwilleSTABIL® 20/8 6x7-19x22MF
8

Properties.

- **metric, differing** end sizes
- deeply cranked, support angle 75°
- durable, slim and lightweight design
- high flexural strength due to double-T profile
- STAHLWILLE's rounded finish ensures a non-slip, pleasant feel
- drop-forged, hardened, and cooled in an oil bath
- Chrome Alloy Steel, chrome-plated
- safely integrated in the modular Tool Control System (TCS)

Contains 8-pieces:

8 double-ended ring wrenches **No. 20:** 6 x 7; 8 x 9; 10 x 11; 12 x 13; 14 x 15; 16 x 17;
18 x 21; 19 x 22 mm

Benefits.

High quality double-ended ring wrench, low-crank, in metric sizes.

The AS-Drive profile prevents damage to the fastener caused by force being applied to the edges of the nut or bolt.

In the modular Tool Control System (TCS) tool inlays - an intelligent storage solution for tool and workshop trolleys.

A special manufacturing process makes thin-walled rings possible - primarily for slightly lower-lying screw connections.

The distinctive STAHLWILLE rounded finish ensures the combination wrench is comfortable to hold and is easy to grip, ensuring safe working, even with oily hands.

Product highlights.



PRODUCT IMAGE
IN PROGRESS

Order and check.

The set is securely organized in a STAHLWILLE TCS foam inlays. These durable inlays are chemical-resistant and have precise recesses for each tool. The eye-catching yellow underside of the TCS inlays serves as a signal surface to enable quick checking of the set's completeness.

Technologies and features.



Tool Control System

The intelligent modular inlay system protects and organizes the tools in tool boxes, tool trolleys and workbenches. Two-color foam inlays make checking the completeness of the tools quick and easy.



Double-T profile


Our ring, open-ended and combination wrenches have an additional recess in the middle of the tool. Similar to the principle of a double-T beam, this provides a tremendous load capacity and maximum strength whilst reducing weight.



Thin-walled rings

The thin-walled diameter of our rings makes it easier to work in confined spaces. The ring wall is deeper than standard nuts, which prevents jamming.

Technical drawing.

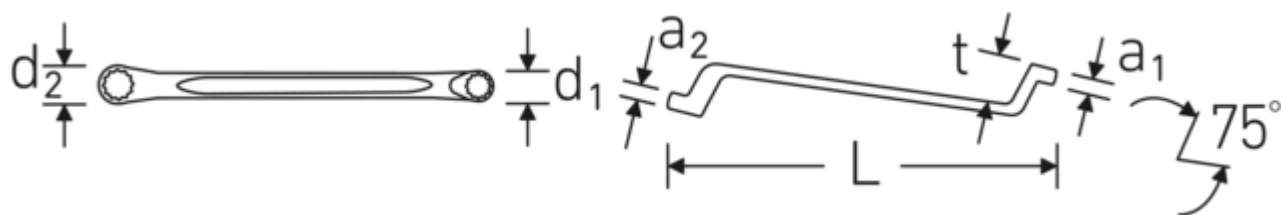

Technical attributes.

Number of tools	8
Range	6x7-19x22
Width mm (b)	175 mm
Height mm (h)	45 mm
Contents	6 x 7; 8 x 9; 10 x 11; 12 x 13; 14 x 15; 16 x 17; 18 x 21; 19 x 22 mm
Length mm (L)	350 mm
Alloy	Chrome Alloy Steel
Surface	chrome-plated
Drawer dividers	1/3

Logistics data.

Depth mm (IFS)	365
Width mm (IFS)	185
Height mm (IFS)	80
WEEE/ElektroG	nicht ear-pflichtig
Length (packaged, mm)	365
Width (packaged, mm)	185
Height (packaging, mm)	80
Volume (packaged, dm3)	5.402 dm3
Product no.	96830356
Weight (gross, kg)	1,411
Weight PAP (kg)	0,138
Weight PVC (kg)	0,000
GTIN	4018754175277
Country of origin AWR	GERMANY
Region of origin	Nordrhein-Westfalen
Customs tariff no.	82041100
Packing standard	1
Weight (g)	1323 g

Parts list.



41041922
Double-ended ring
wrench



41041821
Double-ended ring
wrench



41041617
Double-ended ring
wrench



41041415
Double-ended ring
wrench



41041213
Double-ended ring
wrench



41041011
Double-ended ring
wrench



41040809
Double-ended ring
wrench



41040607
Double-ended ring
wrench

Variants.

Product no.	Model No. (ERP)	Description	GTIN
96830356	StahlwilleSTABIL® TCS 20/8	Double ended ring wrenches i.TCS inlay TCS StahlwilleSTABIL® 20/8 6x7-19x22MF 8	4018754175277

GTIN.



STAHLWILLE Eduard Wille GmbH

Lindentallee 27 · 42349 Wuppertal · Germany · Phone: +49 202 4791-0

info@stahlwille.de · www.stahlwille.com

© STAHLWILLE Eduard Wille GmbH, Wuppertal