



Angle and torque wrench MANOSKOP®

714



Product no. **96500100**
GTIN **4018754222773**
Model **MANOSKOP® 714/100**



Label.

Angle and torque wrench MANOSKOP® 714 100-1000N·m 22 x 28 mm L. 1343mm

Benefits.

An angle and torque wrench for bolted joints in accordance with the torque, angle of rotation, torque with "angle of rotation" monitoring variable and angle of rotation with "torque" monitoring variable tightening method.

Visual evaluation of the bolted joint.

Thanks to the combination of the patented electromechanical triggering and the display and acoustic feedback, the wrench provides signalling with maximum optimisation.

Electromechanically displaying (with electronic measurement) and triggering (with the familiar mechanical "click").

Simple documentation of the recorded measurements on the PC via the USB interface and via an optional Bluetooth Low Energy module.

Product highlights.



Angle of rotation and torque measurement

Our torque and angle wrenches make it possible to tighten bolted joints in accordance with the torque, angle of rotation, torque with 'angle of rotation' monitoring variable and angle of rotation with 'torque' monitoring variable tightening method. Thanks to this functional diversity, the wrench is suitable for the most popular tightening methods.




Electromechanical clicking type.

The MANOSKOP® with patented electromechanical release measures the applied torque electronically. A visual evaluation of the bolted connection is provided by a display and signal lights on the side. Unlike a purely electronic torque wrench, the cycle and haptic user feedback are also mechanical. A clearly perceptible cycle and an equally audible click indicate that the target value has been reached.



Comprehensive documentation.

Our electromechanical torque wrenches can be documented. They can be easily configured and programmed using the SensoMaster software. This means that all data can be read out, stored and subjected to further processing on the PC for better monitoring and optimization of the work processes. The digital measurement also allows the actual torque which has been applied (actual value) to be specified after triggering, as well as the target value.



Also suitable for difficult application areas.

STAHLWILLE electromechanical torque wrenches are ideal for application areas in which electronic torque wrenches are pushed to their signalling limits - such as when working overhead or if the display cannot be read off. Even in noisy, busy and very bright environments which can make it difficult to perceive vibrations or visual and acoustic signals, electromechanical torque wrenches use patented haptic feedback to indicate that the target value has been reached.



More reliability.

Our electromechanical torque wrenches minimise operating errors. Screw joints and sequence plans, for example, can be parameterized and saved. The torque wrench then automatically sets the clicking type torque for the selected bolted joint. The clicking type torque is also specified digitally so that parallax effects (errors caused by to an incorrect reading angle), which are possible when using a mechanical scale are eliminated.



Perfect entry level solution.

Electromechanical STAHLWILLE torque wrenches make it easier to switch from purely mechanical to documenting torque wrenches. Users who previously only worked with mechanical wrenches become accustomed to them more quickly because our electromechanical torque wrenches provide maximum optimized signalling with haptic, acoustic and visual feedback. This simplifies the switch to digital technology.

Technologies and features.



2-component handle

Our 2-component handle is non-slip and ergonomically designed. It is resistant to the most common oils, greases, fuels, brake fluids, and Skydrol. The arrow markings on the handle indicate the direction of operation.




QuickRelease

The QuickRelease safety lock prevents unintentional loss of insert tools. These click securely into place, and are only released again at the push of a button for a quick tool change. In transducers: The QuickRelease safety lock helps you to quickly mount and change transducers. The transducers lock into the calibration system and only unlock again at the push of the buttons.

**DIN EN ISO 6789-2**

Our torque wrenches and torque screwdrivers are professionally calibrated in accordance with DIN EN ISO 6789-2 and delivered with a corresponding calibration certificate. We also calibrate angle-controlled torque wrenches in accordance with VDI 2648-2. This ensures the accuracy and traceability of our tools.

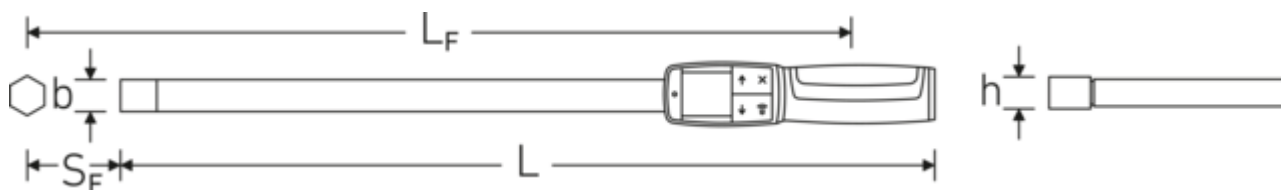Technical drawing.**Technical attributes.**

Measuring range N·m	100-1000 N·m
Measuring range ft·lb	74-750 ft·lb
Measuring range in·lb	900-9000 in·lb
Battery type	Micro (AAA) 1,5V
Width mm (b)	30,6 mm
DIN	DIN EN ISO 6789-2:2017
Weight with box	10500 g
Size	100
Tool holder size [internal square]	22 x 28 mm
Height mm (h)	25,6 mm
Length mm (L)	1343 mm
LF	1343 mm
SF	55 mm

Logistics data.

Depth mm (IFS)	1530
Width mm (IFS)	130
Height mm (IFS)	100
WEEE/ElektroG	Großgeräte B2C
Length (packaged, mm)	1530
Width (packaged, mm)	130
Height (packaging, mm)	100
Volume (packaged, dm ³)	19.89 dm ³
Product no.	96500100
Weight (gross, kg)	10,500
Weight PAP (kg)	0,650
Weight PVC (kg)	0,000
GTIN	4018754222773
Country of origin AWR	GERMANY
Region of origin	Nordrhein-Westfalen
Customs tariff no.	82041100
Packing standard	1
Weight (g)	4990 g

Parts list.



59220003
Battery

51110057
USB cable

Variants.


Product no.	Model No. (ERP)	Description	GTIN
96500901	MANOSKOP® 714/1	Angle and torque wrench MANOSKOP® 714 1-10N·m 9 x 12 mm L. 226mm	4018754222780
96500902	MANOSKOP® 714/2	Angle and torque wrench MANOSKOP® 714 2-20N·m 9 x 12 mm L. 226mm	4018754222797
96500904	MANOSKOP® 714/4	Angle and torque wrench MANOSKOP® 714 4-40N·m 9 x 12 mm L. 252mm	4018754222803
96500906	MANOSKOP® 714/6	Angle and torque wrench MANOSKOP® 714 6-60N·m 9 x 12 mm L. 393mm	4018754222810
96500910	MANOSKOP® 714/10	Angle and torque wrench MANOSKOP® 714 10-100N·m 9 x 12 mm L. 466mm	4018754222827
96500920	MANOSKOP® 714/20	Angle and torque wrench MANOSKOP® 714 20-200N·m 14 x 18 mm L. 547mm	4018754222834
96500940	MANOSKOP® 714/40	Angle and torque wrench MANOSKOP® 714 40-400N·m 14 x 18 mm L. 687mm	4018754222841
96500965	MANOSKOP® 714/65	Angle and torque wrench MANOSKOP® 714 65-650N·m 22 x 28 mm L. 890mm	4018754222858
96500980	MANOSKOP® 714/80	Angle and torque wrench MANOSKOP® 714 80-800N·m 22 x 28 mm L. 1158mm	4018754222865
96500100	MANOSKOP® 714/100	Angle and torque wrench MANOSKOP® 714 100-1000N·m 22 x 28 mm L. 1343mm	4018754222773

GTIN.



4 018754 222773

Accessories (for).



96585235
SensoMaster Live
software



96521161
Interface adapter set



52110061
Interface adapter



52110162
Support for docking
station No. 7762



52110062
Docking station



54101195
Li-Ion battery



52110220
Bluetooth Low Energy
module 714

STAHLWILLE Eduard Wille GmbH

Lindenallee 27 · 42349 Wuppertal · Germany · Phone: +49 202 4791-0

info@stahlwille.de · www.stahlwille.com

© STAHLWILLE Eduard Wille GmbH, Wuppertal