STAHLWILLE()®



Double open ended spanners i.TCS inlay

TCS MOTOR 10a/9

Product no. 96838779

GTIN 4018754191284
Model MOTOR TCS 10a/9







Label.

Double open ended spanners i.TCS inlay MOTOR TCS $10a/9 \ 1/4x5/16-1.1/8x1.5/169$ pcs.

Properties.

- imperial, differing end sizes in TCS inlay
- straight design, jaws angled 15°
- · durable, slim and lightweight design
- high flexural strength due to double-T profile
- STAHLWILLE's rounded finish ensures a non-slip, pleasant feel
- · drop-forged, hardened, and cooled in an oil bath
- Chrome Alloy Steel, chrome-plated
- DIN 3110, ISO 10102
- safely integrated in the modular Tool Control System (TCS)

Contains 9-pieces:

9 double open-ended spanners **No. 10a**: $1/4 \times 5/16$; $3/8 \times 7/16$; $1/2 \times 9/16$; $19/32 \times 11/16$; $5/8 \times 3/4$; $3/4 \times 7/8$; $25/32 \times 13/16$; $15/16 \times 1$; $1 1/8 \times 15/16$ "

Product highlights.



Order and check.

The set is securely organised in a STAHLWILLE TCS foam inlays. These durable inlays are chemical-resistant and have precise recesses for each tool. The eye-catching yellow underside of the TCS inlays serves as a signal surface to enable quick checking of the set's completeness.

Technologies and features.



Tool Control System

The intelligent modular inlay system protects and organises the tools in tool boxes, tool trolleys and workbenches. Two-colour foam inlays make checking the completeness of the tools quick and easy.



Double-T profile


Our ring, open-ended and combination spanners have an additional recess in the middle of the tool. Similar to the principle of a double-T beam, this provides a tremendous load capacity and maximum strength whilst reducing weight.




Offset Shaft Design

Our spanners are specially designed with additional reinforcement in the load zones where the greatest amount of force is transmitted - namely where the jaw meets the shank - in order to prevent deformation.

Technical drawing.

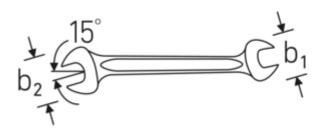



Technical attributes.

Number of tools	9 pcs.	
Range	1/4x5/16-1.1/8x1.5/16	
Width mm (b)	175 mm	
DIN	DIN 3110, ISO 10102	
Height mm (h)	70 mm	

Logistics data.

Depth mm (IFS)	350
Width mm (IFS)	175
Height mm (IFS)	70
WEEE/ElektroG	nicht ear-pflichtig
Length (packaged, mm)	365
Width (packaged, mm)	185

Contents	1/4 x 5/16; 3/8 x 7/16; 1/2 x 9/16; 19/32 x 11/16; 5/8 x	
	3/4; 3/4 x 7/8; 25/32 x	
	3/4, 3/4 X //0, 23/32 X	
	13/16; 15/16 x 1; 1 1/8 x 1	
	5/16"	
	3/16	
Length mm (L)	350 mm	
Alloy	Chrome Alloy Steel	
Surface	chrome-plated	


1/3

Height (packaging, mm)	80	
Volume (packaged, dm3)	5.402 dm3	
Product no.	96838779	
Weight (gross, kg)	1,870	
Weight PAP (kg)	0,138	
Weight PVC (kg)	0,000	
GTIN	4018754191284	
Country of origin AWR	GERMANY	
Region of origin	Nordrhein-Westfalen	
Customs tariff no.	82041100	
Packing standard	1	
Weight (g)	1555 g	

Parts list.

Drawer dividers



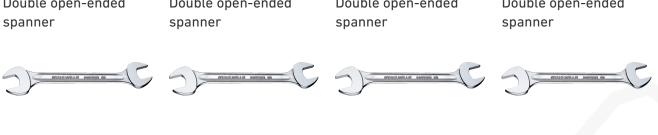

40433640404335384043323440432428Double open-ended
spannerDouble open-ended
spannerDouble open-ended
spannerDouble open-ended
spanner



40431620 Double open-ended spanner

Variants.

Product no.	Model No. (ERP)	Description	GTIN
96838779	MOTOR TCS 10a/9	Double open ended spanners i.TCS inlay MOTOR TCS 10a/9 1/4x5/16-1.1/8x1.5/16 9 pcs.	4018754191284

GTIN.

