



Service MANOSKOP® torque wrench w.mount for insert tools

730 Fix



Product no. **96503040**
GTIN **4018754269471**
Model **730/40 FIX**



Label.

Service MANOSKOP torque wrench w.mount for insert tools 730 Fix 80-400N·m 14 x 18 mm L. 607mm

Properties.


- for work on assembly lines or for repetitive production tasks
- clicking type with dual stop signal
- adjustment knob can be unscrewed after setting the desired torque value- subsequent changing of the setting is thus prevented
- the included TORX® Tamper Resistant locking screw also protects against tampering, as well as the included self-adhesive seals. no adjustment is possible without breaking the seal
- no reset to '0' required
- the measuring element is only under load when a force is applied
- fast, precise adjustment with QuickSelect quick adjustment
- dual scale N·m/ft·lb
- mount for interchangeable insert tools
- with QuickRelease safety lock
- clicking mechanism insensitive to continuous loads and counter-loads (up to the max. measurement range of the torque wrench)
- counter-clockwise tightening by turning the insert tools over
- optimal calibration with perfectControl® calibration systems No. 7794 or calibration systems No. 7706, 7791
- easy adjustment without disassembly via 2 external adjustment screws
- with 2-component handle
- in sturdy plastic box (sizes 80-100 in sheet steel box)
- calibration certificate in accordance with DIN EN ISO 6789-2:2017
- **accuracy $\pm 3\%$**

Product highlights.



Adjustment does not require disassembly.

Quick adjustment from outside, no disassembly of the torque wrench required, with 2 adjustment points for the maximum & minimum values.



Clear fine adjustment.

The easy-to-use and easy-to-read double scale in N·m/ft·lb allows precise and easy target torque adjustment for reliable and accurate application.

Technologies and features.



QuickRelease

The QuickRelease safety lock prevents unintentional loss of insert tools. These click securely into place, and are only released again at the push of a button for a quick tool change. In transducers: The QuickRelease safety lock helps you to quickly mount and change transducers. The transducers lock into the calibration system and only unlock again at the push of the buttons.



QuickSelect

Lightning-fast target value setting: Unlock the adjustment knob, set the value, and lock the knob again.



Low-wear bending beam system

Our torque wrench is equipped with a low-wear release system with a bending beam. Unlike conventional torque wrenches with coiled springs, the bending beam is not subjected to any load until the tool is in operation, which means that the spring does not need to be reset to '0' after use.



Adjustment Lock

The target torque can be quickly adjusted using the adjustment knob. The knob can then be removed to prevent subsequent adjustment. The supplied locking screw (TORX® Tamper resistant) and an adhesive seal provide additional protection against tampering.



2-component handle



Our 2-component handle is non-slip and ergonomically designed. It is resistant to the most common oils, greases, fuels, brake fluids, and Skydrol. The arrow markings on the handle indicate the direction of operation.



DIN EN ISO 6789-2

Our torque wrenches and torque screwdrivers are professionally calibrated in accordance with DIN EN ISO 6789-2 and delivered with a corresponding calibration certificate. We also calibrate angle-controlled torque wrenches in accordance with VDI 2648-2. This ensures the accuracy and traceability of our tools.

Technical drawing.

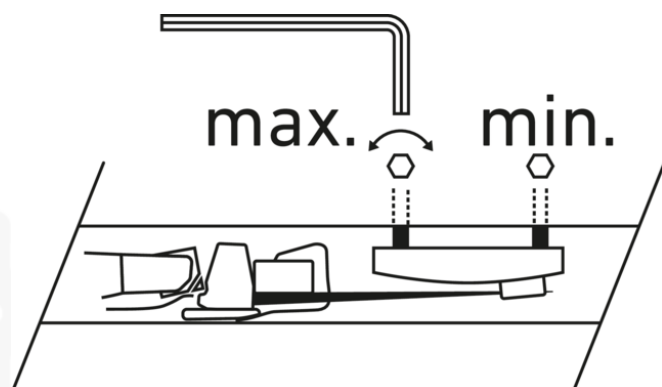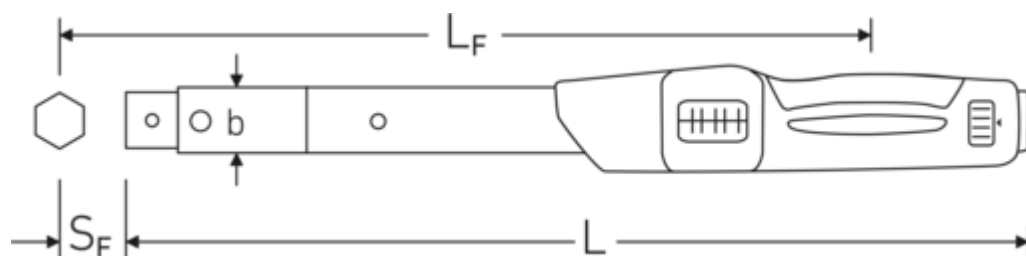

Technical attributes.

Scale division N·m	20 N·m
Scale division ft·lb	10 ft·lb
Measuring range N·m	80-400 N·m
Measuring range ft·lb	60-300 ft·lb
Width mm (b)	28 mm
DIN	DIN EN ISO 6789-2:2017
Fine scale division	2 N·m
Weight with box	2444 g
Size	40
Tool holder size [internal square]	14 x 18 mm
Height mm (h)	23 mm
Length mm (L)	607 mm
LF	564,5 mm
MA N·m	80 N·m
Nominal value N·m	400 N·m
SF	25 mm

Logistics data.

Depth mm (IFS)	685
Width mm (IFS)	95
Height mm (IFS)	70
WEEE/ElektroG	nicht ear-pflichtig
Length (packaged, mm)	685
Width (packaged, mm)	95
Height (packaging, mm)	70
Volume (packaged, dm3)	4.55525 dm3
Product no.	96503040
Weight (gross, kg)	2,430
Weight PAP (kg)	0,130
Weight PVC (kg)	0,000
GTIN	4018754269471
Country of origin AWR	GERMANY
Region of origin	Nordrhein-Westfalen
Customs tariff no.	82041100
Packing standard	1
Weight (g)	1666 g

Parts list.



83825018
Sticker card



81370003
Plastic case, empty



50183040
Torque wrench service
MANOSKOP®



19060001
Torque wrench screws



08160030
Screwdriver socket

Variants.

Product no.	Model No. (ERP)	Description	GTIN
96503005	730/5 FIX	Service MANOSKOP torque wrench w.mount for insert tools 730 Fix 10-50N·m 9 x 12 mm L. 330mm	4018754269433
96503010	730/10 FIX	Service MANOSKOP torque wrench w.mount for insert tools 730 Fix 20-100N·m 9 x 12 mm L. 386mm	4018754269440
96503012	730/12 FIX	Service MANOSKOP torque wrench w.mount for insert tools 730 Fix 25-130N·m 14 x 18 mm L. 421mm	4018754269457
96503020	730/20 FIX	Service MANOSKOP torque wrench w.mount for insert tools 730 Fix 40-200N·m 14 x 18 mm L. 467mm	4018754269464
96503040	730/40 FIX	Service MANOSKOP torque wrench w.mount for insert tools 730 Fix 80-400N·m 14 x 18 mm L. 607mm	4018754269471
96503065	730/65 FIX	Service MANOSKOP torque wrench w.mount for insert tools 730 Fix 130-650N·m 14 x 18 mm L. 890mm	4018754269655
96503465	730NII/65 FIX	Service MANOSKOP torque wrench w.mount for insert tools 730 Fix 130-650N·m 22 x 28 mm L. 911mm	4018754269778
96503080	730/80 FIX	Service MANOSKOP torque wrench w.mount for insert tools 730 Fix 160-800N·m 22 x 28 mm L. 1178mm	4018754269662
96503100	730/100 FIX	Service MANOSKOP torque wrench w.mount for insert tools 730 Fix 200-1000N·m 22 x 28 mm L. 1363mm	4018754269679

GTIN.



Accessories (for).



81370003

Plastic case, empty

STAHLWILLE Eduard Wille GmbH

Lindenallee 27 · 42349 Wuppertal · Germany · Phone: +49 202 4791-0

info@stahlwille.de · www.stahlwille.com

© STAHLWILLE Eduard Wille GmbH, Wuppertal