



## Pullers, two-armed

### 11200

Product no. **71020005**  
GTIN **4018754341924**  
Model **11200/5**

#### Label.

Puller 2armed 250x200mm

#### Properties.

- two-armed
- with sliding, constantly parallel extractor hooks
- for gears, ball bearings, pulleys and similar parts from a shaft or axle
- for ball bearings, ball bearing outer races and sockets out of drilled holes
- reversible arms for use as external and internal pullers
- adjustment scale for uniform adjustment of the extractor hooks
- nitrided spindle, no lubrication required, maintenance-free
- sturdy design, zinc plated

## Benefits.

For quick and reliable removal of gears, ball bearings, fan belts and for extracting the outer rings of ball bearings and bushings from drilled holes.

The adjustment scale on the beam makes precise and uniform adjustment of the puller hooks possible.

The nitrided surface of the spindle allows it to move easily so it does not require additional lubrication.



The adjustable puller arms make for universal use as both an external or internal puller possible.

Outstanding flexural strength thanks to legs with precisely manufactured profiles and smooth, milled guides.

## Product highlights.




### Flexible repositioning function.

The bearing puller has 2 or 3 sliding extractor hooks that are always parallel. These can be quickly and easily repositioned for flexible use as external and internal pullers.



### Reliable sliding properties.

The high-quality tempered and specially coated pressure spindle has particularly good sliding properties in the thread, is maintenance-free and does not require oiling.

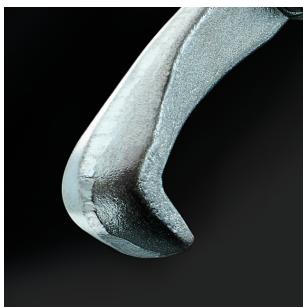

### Adapted access geometry.

Heavy-duty puller hooks made of oil-hardened Chrome Alloy Steel with special access geometry for tight spaces. Custom radii for shafts and axes.



### Sturdy design.

High bending rigidity thanks to cross members with precisely calculated profile ribs and milled, smooth guideways.

**Protection against damage.**

The centering tip is freely rotating - to protect the shafts from damage.




**For increased safety.**

Thoughtfully designed, die-forged and precisely machined, hardened and tempered on state-of-the-art machines - the STAHLWILLE puller range offers numerous products for a wide range of applications. For example, terminal pullers, pullers for ball joints, counter stays or ball joint extractors - always in premium quality.



## Technical drawing.

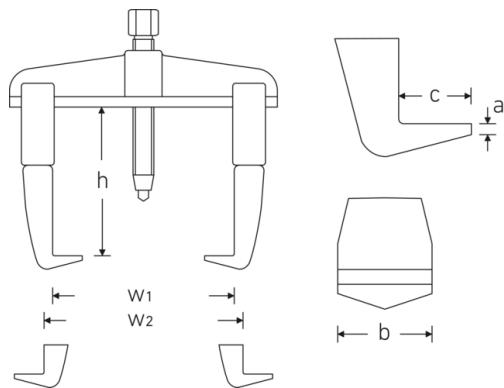

## Technical attributes.

External hex drive (mm)	27 mm
Thickness of hook base tip mm (a)	7 mm
Hook base width mm (b)	36 mm
Hook foot depth mm (c)	28 mm
Size	5
Number of hooks	2
max. load	7,5 t
Clamping depth (h) mm	200 mm
Spindle thread size	G 3/4 x 280
Span max. external mm (w1)	250 mm
Span min. inner mm	125 mm
Span max. inner mm (w2)	330 mm

## Logistics data.

Depth mm (IFS)	350
Width mm (IFS)	105
Height mm (IFS)	130
WEEE/ElektroG	nicht ear-pflichtig
Length (packaged, mm)	350
Width (packaged, mm)	150
Height (packaging, mm)	130
Volume (packaged, dm3)	6.825 dm3
Product no.	71020005
Weight (gross, kg)	7,000
Weight PAP (kg)	0,164
Weight PVC (kg)	0,000
GTIN	4018754341924
Country of origin AWR	GERMANY
Region of origin	Nordrhein-Westfalen
Customs tariff no.	82055980
Packing standard	1
Weight (g)	6969 g

## Variants.

Product no.	Model No. (ERP)	Description	GTIN
71020001	11200/1	Puller 2armed 90x100mm	4018754341788
71020002	11200/2	Puller 2armed 130x100mm	4018754341795
71020003	11200/3	Puller 2armed 160x150mm	4018754341801

71020004	11200/4	Puller 2armed 200x150mm	4018754341917
71020005	11200/5	Puller 2armed 250x200mm	4018754341924
71020006	11200/6	Puller 2armed 350x200mm	4018754341931

## GTIN.



## Spare part(s), spare part(s) for.



79281003  
Puller spindle

## Images.



**STAHLWILLE Eduard Wille GmbH**

Lindenallee 27 · 42349 Wuppertal · Germany · Phone: +49 202 4791-0

[info@stahlwille.de](mailto:info@stahlwille.de) · [www.stahlwille.com](http://www.stahlwille.com)

© STAHLWILLE Eduard Wille GmbH, Wuppertal