



Torque screwdriver TORSIOMAX

775a/12

Product **51460012**
no.
GTIN **4018754142262**
Model **775A/12**
DREHMOMENTSCHRAUBENDREHE



Label.

Torque screwdrivers TORSIOMAX Model 775a/12 Hex 1/4"

Properties.

- clicking type
- for controlled screw tightening in the cN·m and in·lb ranges
- for both single tightenings and for repetitive production tasks
- for clockwise and counter-clockwise tightening
- with 1/4" internal hex drive (F 6,3 DIN 3126 / ISO1173)
- adjustable setting via micrometer scale (rotating scale)
- disengaging clutch prevents overtightening of the fastener
- specially designed handle for safe transmission of torque
- insert tools: all bits with 1/4" hex E 6.3, such as PHILLIPS®, slotted, TORX®, hex, POZIDRIV® etc.
- calibration certificate in accordance with DIN EN ISO 6789-2:2017
- **accuracy ± 6%**


Technologies and features.



DIN EN ISO 6789-2

Our torque wrenches and torque screwdrivers are professionally calibrated in accordance with DIN EN ISO 6789-2 and delivered with a corresponding calibration certificate. We also calibrate angle-controlled torque wrenches in accordance with VDI 2648-2. This ensures the accuracy and traceability of our tools.

Technical drawing.

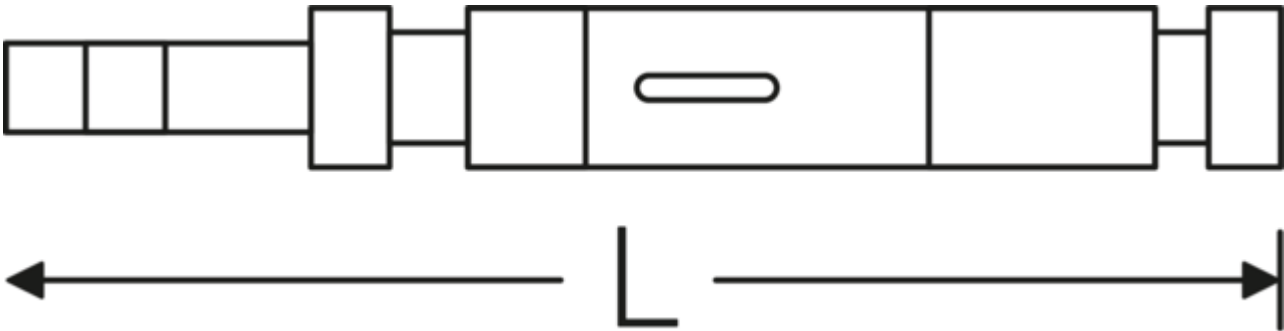

Technical attributes.

Scale division cN·m	- cN·m
Scale division in·lb	0,1 in·lb
Measuring range cN·m	- cN·m
Output hex drive internal (mm)	F 6,3 mm
Measuring range in·lb	2-12 in·lb
DIN	DIN 3126 / ISO1173
Size	a/12
internal hex drive [inch]	1/4 "
Length mm (L)	157 mm

Logistics data.

Depth mm (IFS)	255
Width mm (IFS)	52
Height mm (IFS)	52
WEEE/ElektroG	nicht ear-pflichtig
Length (packaged, mm)	255
Width (packaged, mm)	52
Height (packaging, mm)	52
Volume (packaged, dm3)	0.68952 dm3
Product no.	51460012
Weight (gross, kg)	0,380
Weight PAP (kg)	0,000
Weight PVC (kg)	0,066
GTIN	4018754142262
Country of origin AWR	JAPAN
Region of origin	Ausländischer Ursprung
Customs tariff no.	82054000
Packing standard	1
Weight (g)	200 g

Variants.

Product no.	Model No. (ERP)	Description	GTIN
51060003	775/3 DREHMOMENTSCHRAUBENDREHER	Torque screwdrivers TORSIOMAX Model 775/3 Hex 1/4"	4018754141623

51060012	775/12 DREHMOMENTSCHRAUBENDREHER	Torque screwdrivers TORSIOMAX Model 775/12 Hex 1/4"	4018754141630
51060030	775/30 DREHMOMENTSCHRAUBENDREHER	Torque screwdrivers TORSIOMAX Model 775/30 Hex 1/4"	4018754150946
51060050	775/50 N DREHMOMENTSCHRAUBENDREHER	Torque screwdrivers TORSIOMAX Model 775/50 Hex 1/4"	4018754141647
51060100	775/100 DREHMOMENTSCHRAUBENDREHER	Torque screwdrivers TORSIOMAX Model 775/100 Hex 1/4"	4018754141654
51460003	775A/3 DREHMOMENTSCHRAUBENDREHER	Torque screwdrivers TORSIOMAX Model 775a/3 Hex 1/4"	4018754142255
51460012	775A/12 DREHMOMENTSCHRAUBENDREHER	Torque screwdrivers TORSIOMAX Model 775a/12 Hex 1/4"	4018754142262
51460050	775A/50 DREHMOMENTSCHRAUBENDREHER	Torque screwdrivers TORSIOMAX Model 775a/50 Hex 1/4"	4018754142279

GTIN.



STAHLWILLE Eduard Wille GmbH

Lindenallee 27 · 42349 Wuppertal · Germany · Phone: +49 202 4791-0

info@stahlwille.de · www.stahlwille.com

© STAHLWILLE Eduard Wille GmbH, Wuppertal