



Service MANOSKOP® torque wrenches w.mount for insert tools

730Na



Product no. **50581040**
GTIN **4018754164004**
Model **730NA/40**



Label.

Torque wrench service MANOSKOP® 730Na 800-3600in lb 14 x 18 mm L. 607mm

Properties.

- mount for interchangeable insert tools
- QuickRelease safety lock
- can be applied for either clockwise or anticlockwise tightening by turning the inserts over
- **display deviation value $\pm 3\%$ (size 2; a/2 4 %)**

Product highlights.



Adjustment does not require disassembly.

Quick adjustment from outside, no disassembly of the torque wrench required, with two adjustment points for the maximum & minimum values.



Triggering dual stop signal.

When the target torque is reached, MANOSKOP® 730N provides a noticeable tactile dual stop signal.



Clear fine adjustment.


The easy-to-use and easy-to-read double scale in N·m/ft·lb allows precise and easy target torque adjustment for reliable and accurate application.

Technologies and features.



Factory calibration certificate (ISO calibration)

Our torque tools, transducers, and test equipment are delivered with a factory calibration certificate in accordance with DIN EN ISO 6789-2:2017, and based on DKD-R 10-8 for traceability of the measuring equipment.



Low-wear flexible rod system

Our torque wrench is equipped with a low-wear trigger system with a bending beam. Unlike conventional torque wrenches with coiled springs, the flexible rod is not preloaded in unloaded state, which means that the 'spring' does not need to be reset to '0' after use.



QuickRelease


The QuickRelease safety lock prevents unintentional loss of insert tools. These click securely into place, and are only released again at the push of a button for a quick tool change.



2-component handle

Our 2-component handle is non-slip and ergonomically designed. It is resistant to the most common oils, greases, fuels, brake fluids, and Skydrol. The arrow markings on the handle indicate the direction of operation.

Technical drawing.

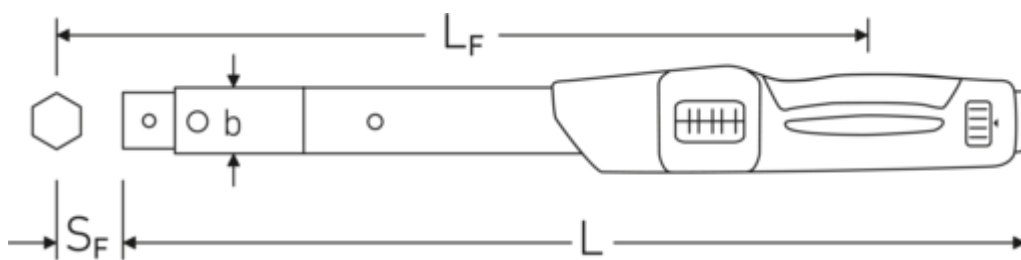

Technical attributes.

Scale division ft·lb	20 ft·lb
Scale division in·lb	100 in·lb
Measuring range ft·lb	60-300 ft·lb
Measuring range in·lb	800-3600 in·lb
Width mm (b)	28 mm

Logistics data.

Depth mm (IFS)	633
Width mm (IFS)	55
Height mm (IFS)	55
WEEE/ElektroG	nicht ear-pflichtig
Length (packed, mm)	633

DIN	DIN EN ISO 6789-2:2017	Width (packed, mm)	55
Fine scale division	2 ft·lb	Height (packed, mm)	55
Size	a/40	Volume (packed, dm3)	1.914825 dm3
Size square socket [internal square drive]	14 x 18 mm	Art. no.	50581040
Height mm (h)	23 mm	Weight (gross, kg)	1,925
Length mm (L)	607 mm	Weight PAP (kg)	0,000
LF	564,5 mm	Weight PVC (kg)	0,115
SF	25 mm	GTIN	4018754164004
		Country of origin AWR	GERMANY
		Region of origin	Nordrhein-Westfalen
		Customs tariff no.	82041100
		Packing standard	1
		Weight	1655 g

Variants.

Art. no.	Model no. (ERP)	Description	GTIN
50181002	730N/2	Torque wrench service MANOSKOP® 730N/2 20-180in lb 9 x 12 mm L. 275mm	4018754170777
50581002	730NA/2	Torque wrench service MANOSKOP® 730Na/2 20-180in lb 9 x 12 mm L. 275mm	4018754170784
50581102	730NA/2 40-180 INLB	Service MANOSKOP torque wrenches w.mount for insert tools 730Na 40-180in lb 9 x 12 mm L. 275mm	4018754295326
50581005	730NA/5	Torque wrench service MANOSKOP® 730Na 90-450in lb 9 x 12 mm L. 330mm	4018754139569
50581010	730NA/10	Torque wrench service MANOSKOP® 730Na 180-900in lb 9 x 12 mm L. 386mm	4018754139576
50581020	730NA/20	Torque wrench service MANOSKOP® 730Na 350-1800in lb 14 x 18 mm L. 467mm	4018754139590
50581040	730NA/40	Torque wrench service MANOSKOP® 730Na 800-3600in lb 14 x 18 mm L. 607mm	4018754164004

GTIN.



STAHLWILLE Eduard Wille GmbH & Co. KG

Lindenallee 27 · 42349 Wuppertal · Germany · Phone: +49 202 4791-0 · Fax: +49 202 4791-200
info@stahlwille.de · www.stahlwille.com · Copyright by STAHLWILLE Eduard Wille GmbH & Co. KG, Wuppertal
Copyright by STAHLWILLE Eduard Wille GmbH & Co. KG, Wuppertal