



Electronic workshop tester SENSOTORK®

7707-1W

Product no. **96521080**
GTIN **4018754181148**
Model **7707N-1W**



Label.

Electronic workshop tester SENSOTORK® Measuring r.0,4-20N·m Internal square 1/4"

Properties.

- for testing indicating and triggering torque screwdrivers
- compact electronic testing device consisting of:
 - 1 patented transducer
 - 1 safety lock
 - 1 display device (DBGM)
 - 1 stand with 1.5 metre cable for the display unit
 - 1 spiral cable
 - 1 power supply (110 V-230 with interchangeable plug adapters)
 - 4 interchangeable square drive adapters for the square drive
- large LCD display for optimum readability
- horizontal or vertical installations
- for controlled right and left measuring
- 3 operating modes: running display of the applied torque (Track), display of the torque on triggering/kink point detection (First-Peak), peak value display (Peak-Hold)
- additional control from the display of the actual tightened torque on triggering torque wrenches
- with QuickRelease security lock
- low transverse forces due to flat transducers
- automatic detection of transducers
- particularly large measurement range from about 2% to 100% of the nominal value
- 3 measuring units (N·m, ft·lb, in·lb)
- software No. 7759-4, including USB adapter and jack cable, allows the measured values to be transmitted to a PC (no additional external power source, power from the PC)
- when recalibrating the individual transducers, the test equipment remains operational on site
- complies with the specifications of guideline DKD-R 10-8
- with certificate
- delivered in a sturdy plastic box

Benefits.

Electronic workshop tester for checking and adjusting indicating and triggering torque wrenches.

Simple, quick and reliable testing of torque wrenches to ensure quality in production.

Measurement in the large torque range up to 1.100 N·m.

Simple exchange of transducers enables quick adjustment to different measuring tasks and specific testing requirements.

The interchangeable square adapters in the mounting block allow flexible use with standard square drive sizes.



Product highlights.



PRODUCT IMAGE
IN PROGRESS

Flexible mounting.

Whether mounted horizontally or vertically - the well-designed mounting points, compact design and rotatable display allow flexible positioning anywhere in the workshop.



PRODUCT IMAGE
IN PROGRESS

Customised drive solution.

Up to 4 square adapters are integrated into the mounting block of the device, within easy reach, to enable flexible use with standard square drive sizes.



PRODUCT IMAGE
IN PROGRESS

Adaptive measuring system.

Our SENSOTORK® 7707W features easily interchangeable transducers. This gives it the ability to be customised for individual measurement requirements.



PRODUCT IMAGE
IN PROGRESS

Resistance to transverse forces.

The high level of accuracy is achieved by flat transducers and a special technology for immediate data processing directly in the transducer. Thanks to an integrated measurement amplifier, the testing device is resistant to bending moments and transverse forces.


Technologies and features.



QuickRelease

The QuickRelease safety lock helps you to quickly mount and change transducers. The sensors lock into the calibration system adapter and only unlock again at the push of a button.

Technical drawing.

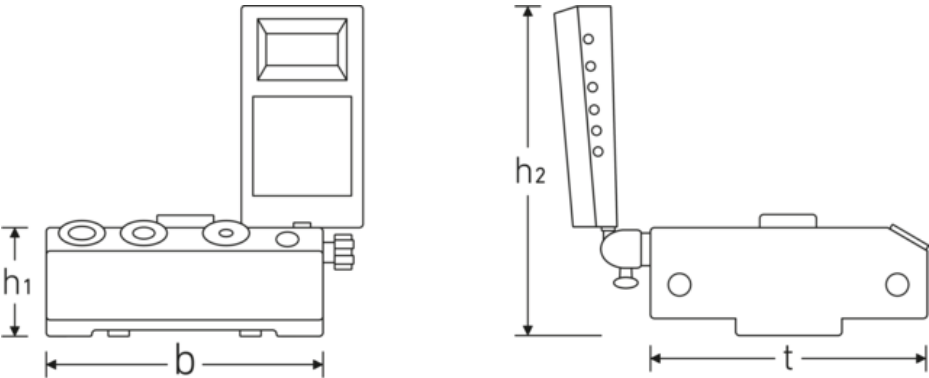

Technical attributes.

| | |
|------------------------|------------|
| Measuring range N·m | 0,4-20 N·m |
| Internal square [inch] | 1/4 " |
| Width mm (b) | 180 mm |
| Weight with box | 9500 g |
| Height mm (h1) | 79 mm |
| Height mm (h2) | 215 mm |
| Model no. | 7707-1W |
| t | 180 mm |

Logistics data.

| | |
|-----------------------|---------------------|
| Depth mm (IFS) | 430 |
| Width mm (IFS) | 335 |
| Height mm (IFS) | 170 |
| WEEE/ElektroG | Kleingeräte B2C |
| Length (packed, mm) | 430 |
| Width (packed, mm) | 335 |
| Height (packed, mm) | 170 |
| Volume (packed, dm3) | 24.4885 dm3 |
| Art. no. | 96521080 |
| Weight (gross, kg) | 9,500 |
| Weight PAP (kg) | 0,016 |
| Weight PVC (kg) | 0,000 |
| GTIN | 4018754181148 |
| Country of origin AWR | GERMANY |
| Region of origin | Nordrhein-Westfalen |
| Customs tariff no. | 90318080 |
| Packing standard | 1 |
| Weight | 6255 g |

Variants.

| Art. no. | Model no. (ERP) | Description | GTIN |
|----------|-----------------|---|---------------|
| 96521086 | 7707-1-3W | Electronic workshop tester SENSOTORK® Measuring r.0,2-10N·m Internal square 1/4" | 4018754241958 |
| 96521085 | 7707-1-2W | Electronic workshop tester SENSOTORK® Measuring r.0,2-10N·m Internal square 1/4" | 4018754241941 |
| 96521080 | 7707N-1W | Electronic workshop tester SENSOTORK® Measuring r.0,4-20N·m Internal square 1/4" | 4018754181148 |
| 96521072 | 7707-2W | Electronic workshop tester SENSOTORK® Measuring r.2-100N·m Internal square 3/8" | 4018754155781 |
| 96521083 | 7707-2-1W | Electronic workshop tester SENSOTORK® Measuring r.4-200N·m Internal square 1/2" | 4018754181162 |
| 96521084 | 7707-2-2W | Electronic workshop tester SENSOTORK® Measuring r.8-400N·m Internal square 3/4" | 4018754181179 |
| 96521082 | 7707N-3W | Electronic workshop tester SENSOTORK® Measuring r.25-1100N·m Internal square 3/4" | 4018754181155 |

GTIN.



STAHLWILLE Eduard Wille GmbH & Co. KG

Lindenallee 27 · 42349 Wuppertal · Germany · Phone: +49 202 4791-0 · Fax: +49 202 4791-200
 info@stahlwille.de · www.stahlwille.com · Copyright by STAHLWILLE Eduard Wille GmbH & Co. KG, Wuppertal
 Copyright by STAHLWILLE Eduard Wille GmbH & Co. KG, Wuppertal