



## Torque screwdriver TORSIOMAX

775/3

Product **51060003**  
no.  
GTIN **4018754141623**  
Model **775/3**  
**DREHMOMENTSCHRAUBENDREHE**



### Label.

Torque screwdriver TORSIOMAX Model 775/3 Hex 1/4"

### Properties.

- click-type
- for torque-controlled bolt tightening in the cN·m and in·lb ranges
- for one-off or production runs
- anticlockwise and clockwise tightening
- with 1/4" internal hex drive (F 6.3 DIN 3126/ISO1173)
- infinitely variable via micrometer scale (twist scale)
- disengaging clutch coupling prevents the preset value being exceeded
- the shape of the handle and its surface texture ensure safe and accurate transmission of torque
- insert tools: For all 1/4" hex E 6.3, PHILLIPS® head screws, POZIDRIV®/ SUPADRIV®, straight-slot, TORX®, hex bits
- certificate in accordance with DIN EN ISO 6789-2:2017
- **display deviation value  $\pm 6\%$**


## Technologies and features.



### Factory calibration certificate (ISO calibration)

Our torque tools, transducers, and test equipment are delivered with a factory calibration certificate in accordance with DIN EN ISO 6789-2:2017, and based on DKD-R 10-8 for traceability of the measuring equipment.

Technical drawing.

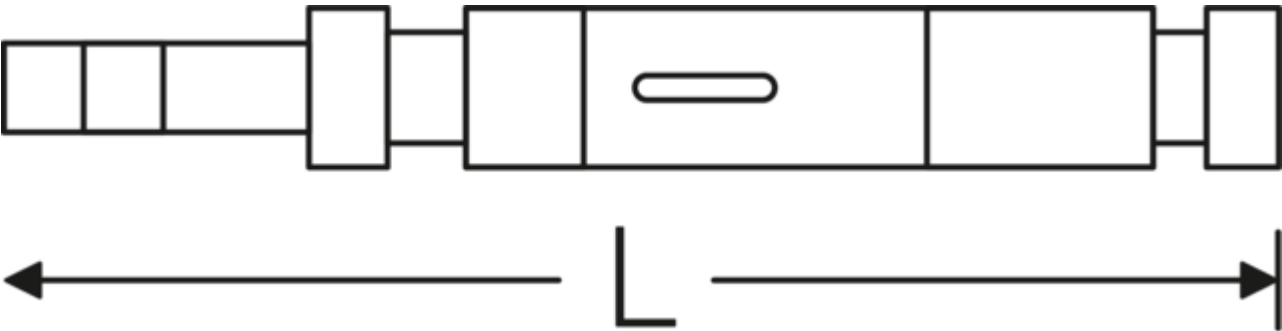

Technical attributes.

|                           |                    |
|---------------------------|--------------------|
| Scale division cN·m       | 0,2 cN·m           |
| Scale division in·lb      | - in·lb            |
| Measuring range cN·m      | 2-30 cN·m          |
| Internal hex drive (mm)   | F 6,3 mm           |
| DIN                       | DIN 3126 / ISO1173 |
| Size                      | 3                  |
| Internal hex drive [inch] | 1/4 "              |
| Length mm (L)             | 105 mm             |

Logistics data.

|                       |                        |
|-----------------------|------------------------|
| Depth mm (IFS)        | 256                    |
| Width mm (IFS)        | 52                     |
| Height mm (IFS)       | 52                     |
| WEEE/ElektroG         | nicht ear-pflichtig    |
| Length (packed, mm)   | 256                    |
| Width (packed, mm)    | 52                     |
| Height (packed, mm)   | 52                     |
| Volume (packed, dm3)  | 0.692224 dm3           |
| Art. no.              | 51060003               |
| Weight (gross, kg)    | 0,265                  |
| Weight PAP (kg)       | 0,000                  |
| Weight PVC (kg)       | 0,066                  |
| GTIN                  | 4018754141623          |
| Country of origin AWR | JAPAN                  |
| Region of origin      | Ausländischer Ursprung |
| Customs tariff no.    | 82041100               |
| Packing standard      | 1                      |
| Weight                | 55 g                   |

Variants.

| Art. no. | Model no. (ERP)                     | Description                                           | GTIN          |
|----------|-------------------------------------|-------------------------------------------------------|---------------|
| 51060003 | 775/3<br>DREHMOMENTSCHRAUBENDREHER  | Torque screwdriver TORSIOMAX<br>Model 775/3 Hex 1/4"  | 4018754141623 |
| 51060012 | 775/12<br>DREHMOMENTSCHRAUBENDREHER | Torque screwdriver TORSIOMAX<br>Model 775/12 Hex 1/4" | 4018754141630 |

|          |                                       |                                                        |               |
|----------|---------------------------------------|--------------------------------------------------------|---------------|
| 51060030 | 775/30<br>DREHMOMENTSCHRAUBENDREHER   | Torque screwdriver TORSIOMAX<br>Model 775/30 Hex 1/4"  | 4018754150946 |
| 51060050 | 775/50 N<br>DREHMOMENTSCHRAUBENDREHER | Torque screwdriver TORSIOMAX<br>Model 775/50 Hex 1/4"  | 4018754141647 |
| 51060100 | 775/100<br>DREHMOMENTSCHRAUBENDREHER  | Torque screwdriver TORSIOMAX<br>Model 775/100 Hex 1/4" | 4018754141654 |
| 51460003 | 775A/3<br>DREHMOMENTSCHRAUBENDREHER   | Torque screwdriver TORSIOMAX<br>Model 775a/3 Hex 1/4"  | 4018754142255 |
| 51460012 | 775A/12<br>DREHMOMENTSCHRAUBENDREHER  | Torque screwdriver TORSIOMAX<br>Model 775a/12 Hex 1/4" | 4018754142262 |
| 51460050 | 775A/50<br>DREHMOMENTSCHRAUBENDREHER  | Torque screwdriver TORSIOMAX<br>Model 775a/50 Hex 1/4" | 4018754142279 |

## GTIN.



**STAHLWILLE Eduard Wille GmbH & Co. KG**

Lindenallee 27 · 42349 Wuppertal · Germany · Phone: +49 202 4791-0 · Fax: +49 202 4791-200

info@stahlwille.de · www.stahlwille.com · Copyright by STAHLWILLE Eduard Wille GmbH & Co. KG, Wuppertal

Copyright by STAHLWILLE Eduard Wille GmbH & Co. KG, Wuppertal