



## Combination spanners i.TCS inlay

### TCS 13217 WT OPEN BOX 13a/22

Product no. **96830125**  
GTIN **4018754248803**  
Model **TCS 13217 WT OPEN BOX 13a/22**



**Label.** Combination spanners i.TCS inlay TCS 13217 WT OPEN BOX 13a/22 3/16-1.1/16 22 pcs.

**Properties.**

- For the drawers of tool trolley No. 13217
- 460 x 250 x 60 mm
- 22-piece set

## Benefits.

Made in Germany - Combination spanners i.TCS inlay in TCS inlay, 22 pcs., 3/16-1.1/16 mm, ring side 15° angled, , Chrome Alloy Steel

## Product highlights.



**PRODUCT IMAGE  
IN PROGRESS**

### Non-slip surface

STAHLWILLE spanners have a high-quality surface finish with good grip, making it possible to work safely and efficiently, even with greasy hands. The non-slip property improves control during handling.



### A solution for every situation.

Our combination spanners are available in different versions (metric, imperial, long, with Spline-Drive profile) and as sets in textile bags, roll-up tool pouches or TCS inlays.



PRODUCT IMAGE  
IN PROGRESS

### Order and check.

The set is securely organised in a STAHLWILLE TCS foam inlays. These durable inlays are chemical-resistant and have precise recesses for each tool. The eye-catching yellow underside of the TCS inlays serves as a signal surface to enable quick checking of the set's completeness.

## Technologies and features.



### Tool Control System

The intelligent modular inlay system protects and organises the tools in tool boxes, tool trolleys and workbenches. Two-colour foam inlays make checking the completeness of the tools quick and easy.



### Anti-Slip-Drive

The special AS-Drive profile makes high force transmission to the flats of screws and bolts possible without damaging them. This also prevents stripping of the screw head.



### Double-T profile

Our combination and ring spanners have an additional recess in the middle of the tool. Similar to the principle of a double-T beam, this provides a tremendous load capacity and maximum strength whilst reducing weight.



### Thin-walled rings


The thin wall diameter of our rings makes it easier to work in confined spaces. The ring sides are taller than standard nuts, which prevents jamming.



### Offset Shaft Design

Our spanners are specially designed with additional reinforcement in the load zones where the greatest amount of force is transmitted - namely where the jaw meets the shank - in order to prevent deformation.

## Technical drawing.

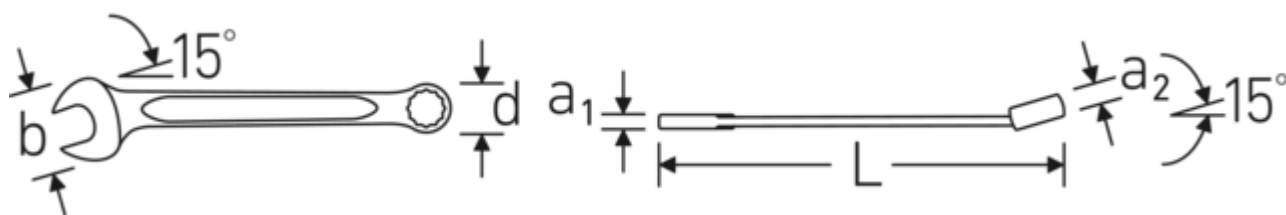

## Technical attributes.

Number of tools	22 pcs.
Range	3/16-1.1/16
Width mm (b)	460 mm
Height mm (h)	60 mm
Capacity	3/16; 13/64; 7/32; 15/64; 1/4; 9/32; 5/16; 11/32; 3/8; 7/16; 1/2; 9/16; 19/32; 5/8; 11/16; 3/4; 25/32; 13/16; 7/8; 15/16; 1; 1 1/16"
Length mm (L)	250 mm
Alloy	Chrome Alloy Steel
Surface	chrome-plated

## Logistics data.

Depth mm (IFS)	460
Width mm (IFS)	250
Height mm (IFS)	58
WEEE/ElektroG	nicht ear-pflichtig
Length (packed, mm)	460
Width (packed, mm)	250
Height (packed, mm)	58
Volume (packed, dm3)	6.67 dm3
Art. no.	96830125
Weight (gross, kg)	2,440
Weight PAP (kg)	0,000
Weight PVC (kg)	0,004
GTIN	4018754248803
Country of origin AWR	GERMANY
Region of origin	Nordrhein-Westfalen
Customs tariff no.	82041100
Packing standard	1
Weight	2440 g

## Variants.

Art. no.	Model no. (ERP)	Description	GTIN
96830125	TCS 13217 WT OPEN BOX 13a/22	Combination spanners i.TCS inlay TCS 13217 WT OPEN BOX 13a/22 3/16-1.1/16 22 pcs.	4018754248803

## GTIN.



## Images.

