

Standard MANOSKOP® torque wrenches w.permanently installed ratchet

721 Quick

Product no. 50204030

GTIN 4018754268948 Model 721/30 QUICK







Label.

Torque wrench MANOSKOP® 721 Quick 60-300N·m 1/2" L. 553mm

Properties.

- click-type
- the measuring element is only under load while force is being applied, no need for manual reset to zero
- · rapid setting thanks to easy-action locking lever in the handle
- ergonomically designed, non-slip adjuster with a thumb recess
- dual stop signal
- twin scales N·m/ft·lb
- · optimised convex handle for strain-free working
- any force applied to the tool after the 'click' or applied in the opposite direction to the current function – e.g. forcible loosening of a jammed screw - does not act on the trigger mechanism and cannot cause damage to it
- all the sensitive components are protected by the sturdy tubular steel housing
- calibration using perfectControl® calibrating unit No 7794 or calibration system No 7706. Readjustment does not require disassembly
- certificate in accordance with DIN EN ISO 6789-2:2017
- display deviation value ± 4%

Benefits.

Made in Germany – STAHLWILLE release torque wrench, ratchet with punch square, length 553 mm, with calibration certificate (DIN EN ISO 6789-2:2017), 50204030.

Patented, low-wear release system with bending rod.

Lightning-fast and precise torque adjustment.

Continued loading after release or loading in the opposite functional direction will not damage the torque wrench.

Product highlights.



Rapid adjustment.

Easy and quick adjustment of the torque is carried out by an easy-to-operate clamping lever in the handle. The scale can be moved quickly and safely with an ergonomically shaped, non-slip adjustment element with thumb recess.



Adjustment does not require disassembly.

Quick adjustment from outside, no disassembly of the torque wrench required, with two adjustment points for the maximum & minimum values.

Technologies and features.



Factory calibration certificate (ISO calibration)


Our torque tools, transducers, and test equipment are delivered with a factory calibration certificate in accordance with DIN EN ISO 6789-2:2017, and based on DKD-R 10-8 for traceability of the measuring equipment.



2-component handle

Our 2-component handle is non-slip and ergonomically designed. It is resistant to the most common oils, greases, fuels, brake fluids, and Skydrol. The arrow markings on the handle indicate the direction of operation.

Technical drawing.

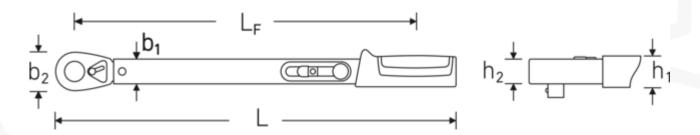

Technical attributes.

Logistics data.

Scale division ft·lb	10 ft·lb	Depth mm (IFS)	555
Scale division N·m	10 N·m	Width mm (IFS)	46
Measuring range N·m	60-300 N·m	Height mm (IFS)	30
Measuring range ft-lb	50-220 ft·lb	WEEE/ElektroG	nicht ear-pflichtig

External square drive (inch)	1/2	Length (packed, mm)	580
		Width (packed, mm)	46
Number of teeth	36	Height (packed, mm)	45
b1	28 mm	Volume (packed, dm3)	1.2006 dm3
b2	44 mm	Art. no.	50204030
DIN	DIN EN ISO 6789-2:2017	Weight (gross, kg)	1,810
Size	30	Weight PAP (kg)	0,000
Height mm (h1)	23 mm	Weight PVC (kg)	0,114
Height mm (h2)	27,5 mm	GTIN	4018754268948
Length mm (L)	553 mm	Country of origin AWR	GERMANY
LF	486 mm	Region of origin	Nordrhein-Westfalen
MA N·m	60 N·m	Customs tariff no.	82041100
Nominal value N·m	300 N·m	Packing standard	1
		Weight	1646 g

Variants.

Art. no.	Model no. (ERP)	Description	GTIN
50204005	721/5 QUICK	Torque wrench MANOSKOP® 721 Quick 6-50N·m 3/8" L. 352mm	4018754268917
50204015	721/15 QUICK	Torque wrench MANOSKOP® 721 Quick 30-150N·m 1/2" L. 452mm	4018754268924
50204020	721/20 QUICK	Torque wrench MANOSKOP® 721 Quick 40-200N·m 1/2" L. 483mm	4018754268931
50204030	721/30 QUICK	Torque wrench MANOSKOP® 721 Quick 60-300N·m 1/2" L. 553mm	4018754268948

GTIN.



Accessories (for).



81370003 Plastic case, empty

Spare part(s) for.



59191030 Ratchet spare parts sets for torque wrenches No.721

Images.



