



## Torque screwdriver TORSIOMAX

**775/12**

Product **51060012**  
no.  
GTIN **4018754141630**  
Model **775/12**  
**DREHMOMENTSCHRAUBENDREHE**



### Label.

Torque screwdrivers TORSIOMAX Model 775/12 Hex 1/4"

### Properties.

- clicking type
- for controlled screw tightening in the cN·m and in·lb ranges
- for single and series tightening
- for clockwise and counter-clockwise tightening
- with 1/4" internal hex drive (F 6,3 DIN 3126 / ISO1173)
- adjustable setting via micrometer scale (rotating scale)
- disengaging clutch prevents overtightening of the fastener
- specially designed handle for safe transmission of torque
- insert tools: all bits with 1/4" hex E 6.3, such as PHILLIPS®, slotted, TORX®, hex, POZIDRIV® etc.
- calibration certificate in accordance with DIN EN ISO 6789-2:2017
- **accuracy  $\pm 6\%$**


## Technologies and features.



### Factory calibration certificate (ISO calibration)

Our torque tools, transducers, and test equipment are delivered with a factory calibration certificate in accordance with DIN EN ISO 6789-2:2017, and based on DKD-R 10-8 for traceability of the measuring equipment.

Technical drawing.

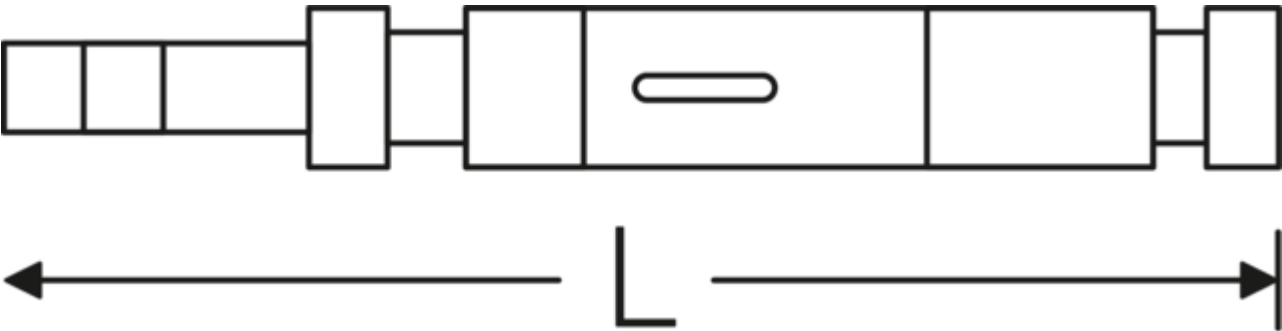

Technical attributes.

|                                |                    |
|--------------------------------|--------------------|
| Scale division cN·m            | 1 cN·m             |
| Scale division in·lb           | - in·lb            |
| Measuring range cN·m           | 20-120 cN·m        |
| Output hex drive internal (mm) | F 6,3 mm           |
| DIN                            | DIN 3126 / ISO1173 |
| Size                           | 12                 |
| internal hex drive [inch]      | 1/4 "              |
| Length mm (L)                  | 157 mm             |

Logistics data.

|                        |                        |
|------------------------|------------------------|
| Depth mm (IFS)         | 159                    |
| Width mm (IFS)         | 30                     |
| Height mm (IFS)        | 30                     |
| WEEE/ElektroG          | nicht ear-pflichtig    |
| Length (packaged, mm)  | 260                    |
| Width (packaged, mm)   | 51                     |
| Height (packaging, mm) | 51                     |
| Volume (packaged, dm3) | 0.67626 dm3            |
| Product no.            | 51060012               |
| Weight (gross, kg)     | 0,395                  |
| Weight PAP (kg)        | 0,000                  |
| Weight PVC (kg)        | 0,066                  |
| GTIN                   | 4018754141630          |
| Country of origin AWR  | JAPAN                  |
| Region of origin       | Ausländischer Ursprung |
| Customs tariff no.     | 82041100               |
| Packing standard       | 1                      |
| Weight (g)             | 180 g                  |

Variants.

| Product no. | Model No. (ERP)                    | Description                                              | GTIN          |
|-------------|------------------------------------|----------------------------------------------------------|---------------|
| 51060003    | 775/3<br>DREHMOMENTSCHRAUBENDREHER | Torque screwdrivers<br>TORSIOMAX Model 775/3 Hex<br>1/4" | 4018754141623 |

|          |                                       |                                                            |               |
|----------|---------------------------------------|------------------------------------------------------------|---------------|
| 51060012 | 775/12<br>DREHMOMENTSCHRAUBENDREHER   | Torque screwdrivers<br>TORSIOMAX Model 775/12 Hex<br>1/4"  | 4018754141630 |
| 51060030 | 775/30<br>DREHMOMENTSCHRAUBENDREHER   | Torque screwdrivers<br>TORSIOMAX Model 775/30 Hex<br>1/4"  | 4018754150946 |
| 51060050 | 775/50 N<br>DREHMOMENTSCHRAUBENDREHER | Torque screwdrivers<br>TORSIOMAX Model 775/50 Hex<br>1/4"  | 4018754141647 |
| 51060100 | 775/100<br>DREHMOMENTSCHRAUBENDREHER  | Torque screwdrivers<br>TORSIOMAX Model 775/100 Hex<br>1/4" | 4018754141654 |
| 51460003 | 775A/3<br>DREHMOMENTSCHRAUBENDREHER   | Torque screwdrivers<br>TORSIOMAX Model 775a/3 Hex<br>1/4"  | 4018754142255 |
| 51460012 | 775A/12<br>DREHMOMENTSCHRAUBENDREHER  | Torque screwdrivers<br>TORSIOMAX Model 775a/12 Hex<br>1/4" | 4018754142262 |
| 51460050 | 775A/50<br>DREHMOMENTSCHRAUBENDREHER  | Torque screwdrivers<br>TORSIOMAX Model 775a/50 Hex<br>1/4" | 4018754142279 |

## GTIN.



STAHLWILLE Eduard Wille GmbH & Co. KG

Lindenallee 27 · 42349 Wuppertal · Germany · Phone: +49 202 4791-0 · Fax: +49 202 4791-393

info@stahlwille.de · www.stahlwille.com

© STAHLWILLE Eduard Wille GmbH & Co. KG, Wuppertal