



Socket

60

Product no. **06010036**
GTIN **4018754009909**
Model **60 36**



Label. 1 " Socket Size 36mm L.67mm

Properties.

- bi-hex with AS-Drive profile
- 1" internal square drive
- HPQ® high performance steel, chrome-plated
- DIN 3124 / ISO 2725-1


Technologies and features.



High Performance Quality (HPQ®)

Our HPQ® tool is made of wear-resistant high-performance steel, yet is thin-walled and lightweight. It withstands high torques and is ideal for work in confined spaces such as turbines.

Technical drawing.

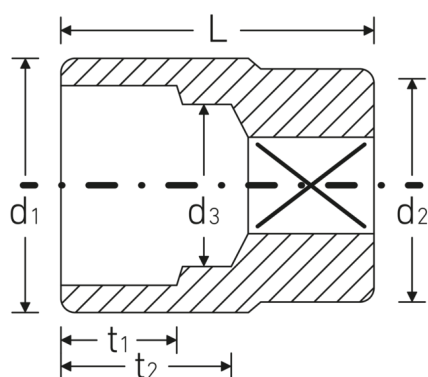

Technical attributes.

Drive profile	bi-hex AS-Drive
Square drive inner (inch)	1 "
d1	49,5 mm
d2	48 mm
d3	33 mm
DIN	DIN 3124 / ISO 2725-1
Length mm (L)	67 mm
Size [mm]	36 mm
t1	24 mm
t2	33,4 mm

Logistics data.

Depth mm (IFS)	67
Width mm (IFS)	50
Height mm (IFS)	50
WEEE/ElektroG	nicht ear-pflichtig
Length (packaged, mm)	100
Width (packaged, mm)	140
Height (packaging, mm)	51
Volume (packaged, dm3)	0.714 dm3
Product no.	06010036
Weight (gross, kg)	0,985
Weight PAP (kg)	0,000
Weight PVC (kg)	0,007
GTIN	4018754009909
Country of origin AWR	GERMANY
Region of origin	Nordrhein-Westfalen
Customs tariff no.	82042000
Packing standard	2
Weight (g)	493 g

Variants.

Product no.	Model No. (ERP)	Description	GTIN
06010030	60 30	1 " Socket Size 30mm L.65mm	4018754009879
06010032	60 32	1 " Socket Size 32mm L.67mm	4018754009886
06010034	60 34	1 " Socket Size 34mm L.67mm	4018754009893

06010036	60 36	1 " Socket Size 36mm L.67mm	4018754009909
06010041	60 41	1 " Socket Size 41mm L.70mm	4018754009916
06010046	60 46	1 " Socket Size 46mm L.75mm	4018754009923
06010050	60 50	1 " Socket Size 50mm L.80mm	4018754009930
06010055	60 55	1 " Socket Size 55mm L.85mm	4018754009947
06010060	60 60	1 " Socket Size 60mm L.90mm	4018754009954

GTIN.

