



UNIFLEX sockets

402a

Product no. **01540024**
GTIN **4018754001613**
Model **402a 3/8**



Label. 1/4 " UNIFLEX sockets Spanner size 3/8" L.38mm

Properties.

- bi-hex with AS-Drive profile
- 1/4" internal square drive
- HPQ® high performance steel, chrome-plated
- SAE AS 954-E / ASME B 107.1


Technologies and features.



High Performance Quality (HPQ®)

Our HPQ® tool is made of wear-resistant high-performance steel, yet is thin-walled and lightweight. It withstands high torques and is ideal for work in confined spaces such as turbines.

Technical drawing.

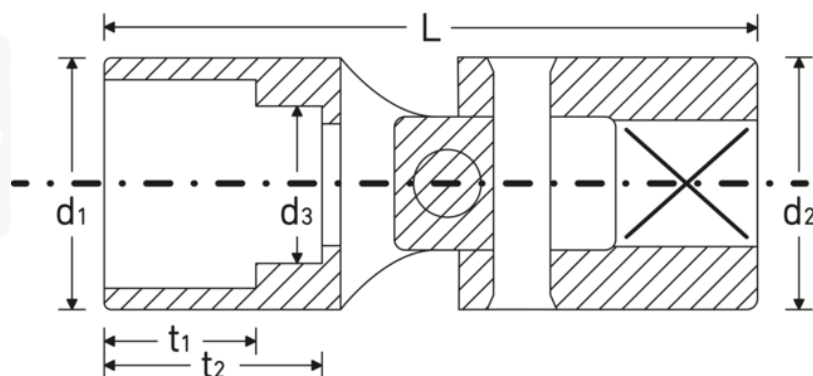

Technical attributes.

Drive profile	bi-hex AS-Drive
Internal square drive (inch)	1/4 "
d1	13,6 mm
d2	12,7 mm
d3	9 mm
Length mm (L)	38 mm
Spanner size [inch]	3/8 "
t1	8,6 mm
t2	13,1 mm

Logistics data.

Depth mm (IFS)	38
Width mm (IFS)	14
Height mm (IFS)	14
WEEE/ElektroG	nicht ear-pflichtig
Length (packed, mm)	55
Width (packed, mm)	55
Height (packed, mm)	14
Volume (packed, dm3)	0.04235 dm3
Art. no.	01540024
Weight (gross, kg)	0,100
Weight PAP (kg)	0,000
Weight PVC (kg)	0,003
GTIN	4018754001613
Country of origin AWR	GERMANY
Region of origin	Nordrhein-Westfalen
Customs tariff no.	82042000
Packing standard	5
Weight	20 g

Variants.

Art. no.	Model no. (ERP)	Description	GTIN
01540014	402 A 7/32	1/4 " UNIFLEX sockets Spanner size 7/32" L.32mm	4018754173570
01540016	402a 1/4	1/4 " UNIFLEX sockets Spanner size 1/4" L.32mm	4018754001590
01540018	402 A 9/32	1/4 " UNIFLEX sockets Spanner size 9/32" L.32mm	4018754173587
01540020	402a 5/16	1/4 " UNIFLEX sockets Spanner size 5/16" L.35mm	4018754001606
01540022	402 A 11/32	1/4 " UNIFLEX sockets Spanner size 11/32" L.35mm	4018754173594
01540024	402a 3/8	1/4 " UNIFLEX sockets Spanner size 3/8" L.38mm	4018754001613
01540028	402 A 7/16	1/4 " UNIFLEX sockets Spanner size 7/16" L.39.5mm	4018754001620
01540032	402 A 1/2	1/4 " UNIFLEX sockets Spanner size 1/2" L.41.5mm	4018754001637

GTIN.

