



## Standard MANOSKOP® torque wrenches w. permanently installed ratchet

### 721 Quick

Product no. **50204005**  
GTIN **4018754268917**  
Model **721/5 QUICK**



#### Label.

MANOSKOP® torque wrench 721 Quick 6-50N·m 3/8" L. 352mm

#### Properties.

- clicking type with dual stop signal
- no reset to "0" required
- the measuring element is only under load when a force is applied.
- Quick adjustment thanks to easy-to-operate locking lever in handle
- non-slip adjuster with thumb recess for quick torque adjustment
- dual scale N·m/ft·lb
- clicking mechanism insensitive to continuous loads and counter-loads (up to the max. measurement range of the torque wrench)
- optimal calibration with perfectControl® calibration systems No. 7794 or calibration systems No. 7706, 7791
- easy adjustment without disassembly via 2 external adjustment screws
- for controlled clockwise tightening
- with 2-component handle
- calibration certificate in accordance with DIN EN ISO 6789-2:2017
- **accuracy  $\pm 4\%$**

#### Benefits.

Made in Germany - STAHLWILLE setting torque wrench, length 352 mm, with calibration certificate (DIN EN ISO 6789-2:2017), 50204005.

Lightning-fast and precise torque adjustment.

Patented, low-wear release system with flexible rod.

Continued loading after release or loading in the opposite direction will not damage the torque wrench.

## Product highlights.



### Rapid adjustment.

Easy and quick adjustment of the torque is carried out by an easy-to-operate clamping lever in the handle. The scale can be moved quickly and safely with an ergonomically shaped, non-slip adjustment element with thumb recess.



### Adjustment does not require disassembly.

Quick adjustment from outside, no disassembly of the torque wrench required, with 2 adjustment points for the maximum & minimum values.

## Technologies and features.



### Factory calibration certificate (ISO calibration)


Our torque tools, transducers, and test equipment are delivered with a factory calibration certificate in accordance with DIN EN ISO 6789-2:2017, and based on DKD-R 10-8 for traceability of the measuring equipment.



### 2-component handle

Our 2-component handle is non-slip and ergonomically designed. It is resistant to the most common oils, greases, fuels, brake fluids, and Skydrol. The arrow markings on the handle indicate the direction of operation.

## Technical drawing.

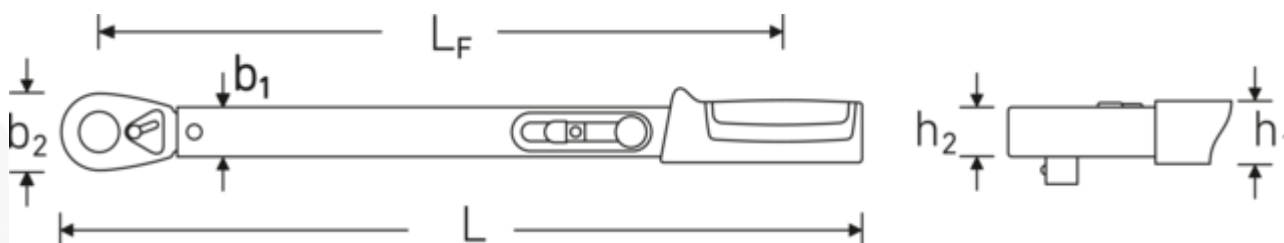

## Technical attributes.

Scale division N·m

2 N·m

## Logistics data.

Depth mm (IFS)

352

Scale division ft-lb	1 ft-lb	Width mm (IFS)	40
Measuring range N·m	6-50 N·m	Height mm (IFS)	50
Measuring range ft-lb	5-36 ft-lb	WEEE/ElektroG	nicht ear-pflichtig
External square drive (inch)	3/8	Length (packaged, mm)	370
Number of teeth	30	Width (packaged, mm)	45
b1	28 mm	Height (packaging, mm)	50
b2	27,5 mm	Volume (packaged, dm <sup>3</sup> )	0.8325 dm <sup>3</sup>
DIN	DIN EN ISO 6789-2:2017	Product no.	50204005
Size	5	Weight (gross, kg)	0,960
Height mm (h1)	23 mm	Weight PAP (kg)	0,000
Height mm (h2)	14,5 mm	Weight PVC (kg)	0,000
Length mm (L)	352 mm	GTIN	4018754268917
LF	293 mm	Country of origin AWR	GERMANY
MA N·m	6 N·m	Region of origin	Nordrhein-Westfalen
Nominal value N·m	50 N·m	Customs tariff no.	82041100
		Packing standard	1
		Weight (g)	880 g

## Variants.

Product no.	Model No. (ERP)	Description	GTIN
50204005	721/5 QUICK	MANOSKOP® torque wrench 721 Quick 6-50N·m 3/8" L. 352mm	4018754268917
50204015	721/15 QUICK	MANOSKOP® torque wrench 721 Quick 30-150N·m 1/2" L. 452mm	4018754268924
50204020	721/20 QUICK	MANOSKOP® torque wrench 721 Quick 40-200N·m 1/2" L. 483mm	4018754268931
50204030	721/30 QUICK	MANOSKOP® torque wrench 721 Quick 60-300N·m 1/2" L. 553mm	4018754268948

## GTIN.



## Accessories (for).



81370002

Plastic case, empty

## Spare part(s) for.



59191005

Ratchet spare parts  
sets for torque  
wrenches No.721

## Images.

