



Service MANOSKOP® torque wrench w.mount for shell tools

730/80



Product no. **50180080**
GTIN **4018754114764**
Model **730/80**



Label.

MANOSKOP® torque wrench 730/80 160-800N·m L. 970mm

Properties.

- with holder for interchangeable shell tools
- with adaptor No. 7370/80, all insert tools 14 x 18 mm can also be used (max. 650 N·m)
- delivered in a textile bag

Product highlights.



Adjustment does not require disassembly.

Quick adjustment from outside, no disassembly of the torque wrench required, with 2 adjustment points for the maximum & minimum values.

Technologies and features.



Factory calibration certificate (ISO calibration)


Our torque tools, transducers, and test equipment are delivered with a factory calibration certificate in accordance with DIN EN ISO 6789-2:2017, and based on DKD-R 10-8 for traceability of the measuring equipment.



Low-wear flexible rod system

Our torque wrench is equipped with a low-wear trigger system with a bending beam. Unlike conventional torque wrenches with coiled springs, the flexible rod is not preloaded in unloaded state, which means that the 'spring' does not need to be reset to '0' after use.

Technical drawing.

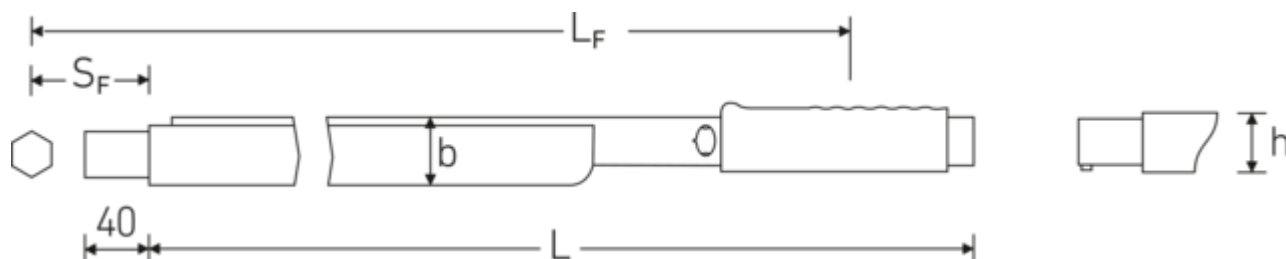

Technical attributes.

Scale division N·m	20 N·m
Scale division ft·lb	20 ft·lb
Measuring range N·m	160-800 N·m
Measuring range ft·lb	120-600 ft·lb
External square drive (mm)	24,5 x 28 mm
Width mm (b)	46 mm
Height mm (h)	43 mm
Length mm (L)	970 mm
LF	990 mm
SF	95 mm

Logistics data.

Depth mm (IFS)	1010
Width mm (IFS)	43
Height mm (IFS)	55
WEEE/ElektroG	nicht ear-pflichtig
Length (packaged, mm)	1140
Width (packaged, mm)	150
Height (packaging, mm)	65
Volume (packaged, dm ³)	11.115 dm ³
Product no.	50180080
Weight (gross, kg)	5,796
Weight PAP (kg)	0,000
Weight PVC (kg)	0,040
GTIN	4018754114764
Country of origin AWR	GERMANY
Region of origin	Nordrhein-Westfalen
Customs tariff no.	82041100
Packing standard	1
Weight (g)	4925 g

Variants.

Product no.	Model No. (ERP)	Description	GTIN
50180080	730/80	MANOSKOP® torque wrench 730/80 160-800N·m L. 970mm	4018754114764

GTIN.

