



Double-ended ring spanner sets StahlwilleSTABIL®, metric

StahlwilleSTABIL® 20

Product no.	96410405
GTIN	4018754080977
Model	StahlwilleSTABIL® 20/8



Label. Double-ended ring spanner set StahlwilleSTABIL® 20/8 6x7-20x22 8 pcs.

- Properties.**
- **metric, differing** end sizes
 - deeply cranked, support angle 75°
 - durable, slim and lightweight design
 - high flexural strength due to double-T profile
 - STAHLWILLE's rounded finish ensures a non-slip, pleasant feel
 - drop-forged, hardened, and cooled in an oil bath
 - Chrome Alloy Steel, chrome-plated
 - in cardboard packaging

Benefits.

High quality double-ended ring spanner, low-crank, in metric sizes.

The AS-Drive profile prevents damage to the fastener caused by force being applied to the edges of the nut or bolt.

Manufactured from durable Chrome Alloy Steel for a long service life and resistance to wear.

A special manufacturing process makes thin-walled rings possible - primarily for slightly lower-lying screw connections.

The distinctive STAHLWILLE rounded finish ensures the combination spanner is comfortable to hold and is easy to grip, ensuring safe working, even with oily hands.

Technologies and features.



Double-T profile


Our ring, open-ended and combination spanners have an additional recess in the middle of the tool. Similar to the principle of a double-T beam, this provides a tremendous load capacity and maximum strength whilst reducing weight.



Thin-walled rings

The thin-walled diameter of our rings makes it easier to work in confined spaces. The ring wall is deeper than standard nuts, which prevents jamming.

Technical drawing.

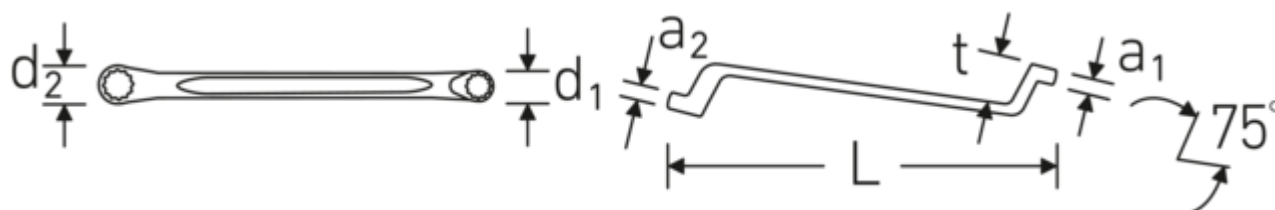

Technical attributes.

Number of tools	8 pcs.
Range	6x7-20x22
Contents	6 x 7; 8 x 9; 10 x 11; 12 x 13; 14 x 15; 16 x 17; 18 x 19; 20 x 22 mm
Alloy	Chrome Alloy Steel
Surface	chrome-plated
Model No.	20/8

Logistics data.

Depth mm (IFS)	325
Width mm (IFS)	65
Height mm (IFS)	50
WEEE/ElektroG	nicht ear-pflichtig
Length (packaged, mm)	325
Width (packaged, mm)	65
Height (packaging, mm)	50
Volume (packaged, dm3)	1.05625 dm3
Product no.	96410405
Weight (gross, kg)	1,220
Weight PAP (kg)	0,060
Weight PVC (kg)	0,000
GTIN	4018754080977

Country of origin AWR	GERMANY
Region of origin	Nordrhein-Westfalen
Customs tariff no.	82041100
Packing standard	1
Weight (g)	1220 g

Variants.

Product no.	Model No. (ERP)	Description	GTIN
96410408	StahlwilleSTABIL® 20/7	Double-ended ring spanner set StahlwilleSTABIL® 20/7 6x7-18x19 7 pcs.	4018754122943
96410405	StahlwilleSTABIL® 20/8	Double-ended ring spanner set StahlwilleSTABIL® 20/8 6x7-20x22 8 pcs.	4018754080977
96410409	StahlwilleSTABIL® 20/9	Double-ended ring spanner set StahlwilleSTABIL® 20/9 6x7-21x24 9 pcs.	4018754122950
96410407	StahlwilleSTABIL® 20/10	Double-ended ring spanner set StahlwilleSTABIL® 20/10 6x7-30x32 10 pcs.	4018754080991
96410406	StahlwilleSTABIL® 20/12	Double-ended ring spanner set StahlwilleSTABIL® 20/12 6x7-30x32 12 pcs.	4018754080984

GTIN.



STAHLWILLE Eduard Wille GmbH & Co. KG

Lindenallee 27 · 42349 Wuppertal · Germany · Phone: +49 202 4791-0 · Fax: +49 202 4791-393

info@stahlwille.de · www.stahlwille.com

© STAHLWILLE Eduard Wille GmbH & Co. KG, Wuppertal