



Pullers, two-armed

11200

Product no. **71020001**
GTIN **4018754341788**
Model **11200/1**

Label. Puller 2armed 90x100mm

Properties.

- two-armed
- with sliding, constantly parallel puller hooks
- for pulling off gears, ball bearings, pulleys and similar parts from a shaft or axle
- for pulling ball bearings, ball bearing outer races and sockets out of drilled holes
- reversible arms for use as external and internal pullers
- adjustment scale for uniform adjustment of the extractor hooks
- nitrided spindle, no lubrication required, maintenance-free
- sturdy design, galvanised

Benefits.


For quick and reliable removal of gears, ball bearings, fan belts and for extracting the outer rings of ball bearings and bushings from drilled holes.

The adjustment scale on the beam makes precise and uniform adjustment of the puller hooks possible.

The nitrided surface of the spindle allows it to move easily so it does not require additional lubrication.

The adjustable puller arms make for universal use as both an external or internal puller possible.

Outstanding flexural strength thanks to legs with precisely manufactured profiles and smooth, milled guides.



Product highlights.




Flexible repositioning function.

The bearing puller has 2 or 3 sliding extractor hooks that are always parallel. These can be quickly and easily repositioned for flexible use as external and internal pullers.




Reliable sliding properties.

The high-quality tempered and specially coated pressure spindle has particularly good sliding properties in the thread, is maintenance-free and does not require oiling.



Adapted access geometry.

Heavy-duty puller hooks made of oil-hardened Chrome Alloy Steel with special access geometry for tight spaces. Custom radii for shafts and axes.



Sturdy design.

High bending rigidity thanks to cross members with precisely calculated profile ribs and milled, smooth guideways.



Protection against damage.


The centering tip is freely rotating - to protect the shafts from damage.



For increased safety.

Thoughtfully designed, die-forged and precisely machined, hardened and tempered on state-of-the-art machines - the STAHLWILLE puller range offers numerous products for a wide range of applications. For example, terminal pullers, pullers for ball joints, counter stays or ball joint extractors - always in premium quality.

Technical drawing.

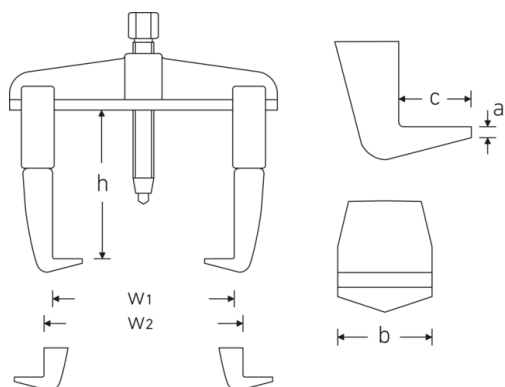

Technical attributes.

External hex drive (mm)	17 mm
Thickness of hook base tip mm (a)	3 mm
Hook base width mm (b)	22 mm
Hook foot depth mm (c)	12 mm
Size	1
Number of hooks	2
max. load	3 t
Clamping depth (h) mm	100 mm
Spindle thread size	M14 x 1,5 x 140
Span max. external mm (w1)	90 mm
Span min. inner mm	60 mm
Span max. inner mm (w2)	140 mm

Logistics data.

Depth mm (IFS)	170
Width mm (IFS)	140
Height mm (IFS)	36
WEEE/ElektroG	nicht ear-pflichtig
Length (packaged, mm)	195
Width (packaged, mm)	155
Height (packaging, mm)	60
Volume (packaged, dm3)	1.8135 dm3
Product no.	71020001
Weight (gross, kg)	1,136
Weight PAP (kg)	0,122
Weight PVC (kg)	0,000
GTIN	4018754341788
Country of origin AWR	GERMANY
Region of origin	Nordrhein-Westfalen
Customs tariff no.	82055980
Packing standard	1
Weight (g)	1014 g

Variants.

Product no.	Model No. (ERP)	Description	GTIN
71020001	11200/1	Puller 2armed 90x100mm	4018754341788
71020002	11200/2	Puller 2armed 130x100mm	4018754341795
71020003	11200/3	Puller 2armed 160x150mm	4018754341801

71020004	11200/4	Puller 2armed 200x150mm	4018754341917
71020005	11200/5	Puller 2armed 250x200mm	4018754341924
71020006	11200/6	Puller 2armed 350x200mm	4018754341931

GTIN.



Spare part(s), spare part(s) for.



79281001
Puller spindle

Images.



STAHLWILLE Eduard Wille GmbH & Co. KG

Lindenallee 27 · 42349 Wuppertal · Germany · Phone: +49 202 4791-0 · Fax: +49 202 4791-393

info@stahlwille.de · www.stahlwille.com

© STAHLWILLE Eduard Wille GmbH & Co. KG, Wuppertal