




DAkkS calibrations

DAkkS

Product no. **58950007**
Model **DAkkS 601 - 1000 Nm**

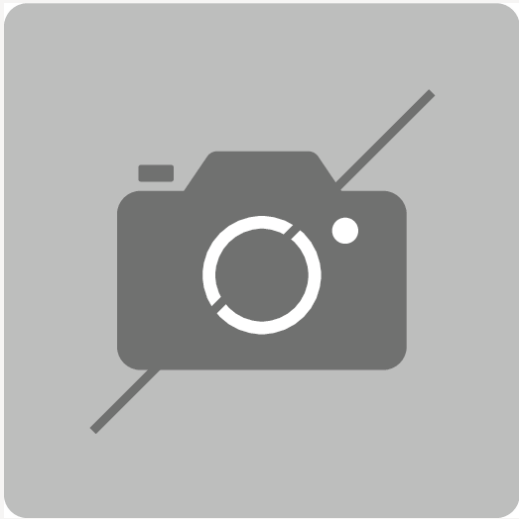

Label.	DAkkS calibration
Properties.	• for torque wrenches

Technologies and features.



DKD-R 10-8 / DIN 51309
Our transducers for torque wrenches and torque testers are professionally calibrated in our DAkkS-accredited calibration laboratory. Depending on requirements, this is done either with a calibration certificate within the scope of our accreditation (according to DKD-R 10 8 or DIN 51309) or with a factory calibration certificate based on these guidelines.

Technical attributes.

Tightening direction	clockwise
Measuring range N·m	601-1000 N·m

Logistics data.

Depth mm (IFS)	200
Width mm (IFS)	20
Height mm (IFS)	20
WEEE/ElektroG	nicht ear-pflichtig
Length (packaged, mm)	200
Width (packaged, mm)	20
Height (packaging, mm)	20
Volume (packaged, dm3)	0.08 dm3
Product no.	58950007

Weight (gross, kg)	0,005
Weight PAP (kg)	0,000
Weight PVC (kg)	0,000
Country of origin AWR	GERMANY
Region of origin	Nordrhein-Westfalen
Customs tariff no.	49019900
Packing standard	1

Variants.

Product no.	Model No. (ERP)	Description	GTIN
58950006	DAkKS 401 - 600 Nm	DAkKS calibration	
58950007	DAkKS 601 - 1000 Nm	DAkKS calibration	
58950014	DAkKS 1001 - 2000 Nm	DAkKS calibration	
58950015	DAkKS bis 400 Nm Li/Re	DAkKS calibration	
58950005	DAkKS bis 400 Nm	DAkKS calibration	
58950020	DAkKS DMS -600 RL	DAkKS calibration	
58950021	DAkKS DMS -1000 RL	DAkKS calibration	
58950022	DAkKS DMS -2000 RL	DAkKS calibration	