



Standard MANOSKOP® torque wrenches w. permanently installed ratchet

721 Quick

Product no. **50204005**
GTIN **4018754268917**
Model **721/5 QUICK**



Label.

MANOSKOP® torque wrench 721 Quick 6-50N·m 3/8" L. 352mm

Properties.

- clicking type with dual stop signal
- no reset to "0" required
- the measuring element is only under load when a force is applied.
- Quick adjustment thanks to easy-to-operate locking lever in handle
- non-slip adjuster with thumb recess for quick torque adjustment
- dual scale N·m/ft·lb
- clicking mechanism insensitive to continuous loads and counter-loads (up to the max. measurement range of the torque wrench)
- optimal calibration with perfectControl® calibration systems No. 7794 or calibration systems No. 7706, 7791
- easy adjustment without disassembly via 2 external adjustment screws
- for controlled clockwise tightening
- with 2-component handle
- calibration certificate in accordance with DIN EN ISO 6789-2:2017
- **accuracy $\pm 4\%$**

Benefits.

Made in Germany - STAHLWILLE setting torque wrench, length 352 mm, with calibration certificate (DIN EN ISO 6789-2:2017), 50204005.

Lightning-fast and precise torque adjustment.

Patented, low-wear release system with flexible rod.

Continued loading after release or loading in the opposite direction will not damage the torque wrench.

Product highlights.



Rapid adjustment.

Easy and quick adjustment of the torque is carried out by an easy-to-operate clamping lever in the handle. The scale can be moved quickly and safely with an ergonomically shaped, non-slip adjustment element with thumb recess.



Adjustment does not require disassembly.

Quick adjustment from outside, no disassembly of the torque wrench required, with 2 adjustment points for the maximum & minimum values.

Technologies and features.



Low-wear flexible rod system

Our torque wrench is equipped with a low-wear release system with a bending beam. Unlike conventional torque wrenches with coiled springs, the flexible rod is not preloaded in the unloaded state, which means that the spring does not need to be reset to "0" after use.



2-component handle


Our 2-component handle is non-slip and ergonomically designed. It is resistant to the most common oils, greases, fuels, brake fluids, and Skydrol. The arrow markings on the handle indicate the direction of operation.



DIN EN ISO 6789-2

Our torque wrenches and torque screwdrivers are professionally calibrated in accordance with DIN EN ISO 6789-2 and delivered with a corresponding calibration certificate. We also calibrate the torque and angle wrenches in accordance with VDI 2648-2. This ensures the accuracy and traceability of our tools.

Technical drawing.

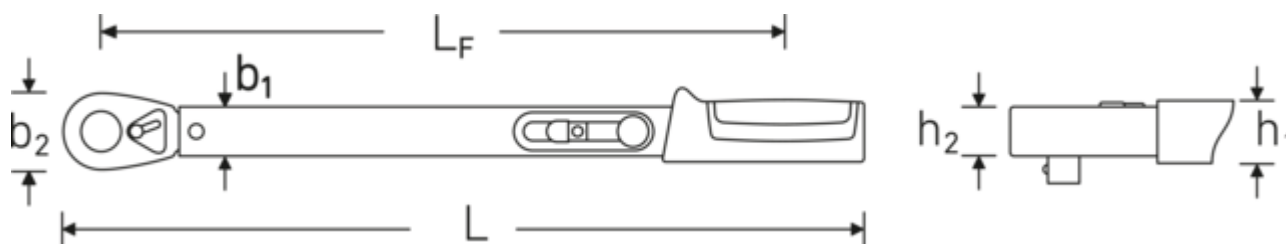

Technical attributes.

Scale division N·m	2 N·m
Scale division ft·lb	1 ft·lb
Measuring range N·m	6-50 N·m
Measuring range ft·lb	5-36 ft·lb
External square drive (inch)	3/8
Number of teeth	30
b1	28 mm
b2	27,5 mm
DIN	DIN EN ISO 6789-2:2017
Size	5
Height mm (h1)	23 mm
Height mm (h2)	14,5 mm
Length mm (L)	352 mm
LF	293 mm
MA N·m	6 N·m
Nominal value N·m	50 N·m

Logistics data.

Depth mm (IFS)	352
Width mm (IFS)	40
Height mm (IFS)	50
WEEE/ElektroG	nicht ear-pflichtig
Length (packaged, mm)	370
Width (packaged, mm)	45
Height (packaging, mm)	50
Volume (packaged, dm3)	0.8325 dm3
Product no.	50204005
Weight (gross, kg)	0,960
Weight PAP (kg)	0,000
Weight PVC (kg)	0,000
GTIN	4018754268917
Country of origin AWR	GERMANY
Region of origin	Nordrhein-Westfalen
Customs tariff no.	82041100
Packing standard	1
Weight (g)	880 g

Variants.

Product no.	Model No. (ERP)	Description	GTIN
50204005	721/5 QUICK	MANOSKOP® torque wrench 721 Quick 6-50N·m 3/8" L. 352mm	4018754268917
50204015	721/15 QUICK	MANOSKOP® torque wrench 721 Quick 30-150N·m 1/2" L. 452mm	4018754268924
50204020	721/20 QUICK	MANOSKOP® torque wrench 721 Quick 40-200N·m 1/2" L. 483mm	4018754268931

50204030

721/30 QUICK

MANOSKOP® torque wrench 721 Quick
60-300N·m 1/2" L. 553mm

4018754268948

GTIN.



Accessories (for).



81370002

Plastic case, empty

Spare part(s), spare part(s) for.



59191005

Ratchet spare parts
sets for torque
wrenches No.721

Images.



STAHLWILLE Eduard Wille GmbH & Co. KG

Lindenallee 27 · 42349 Wuppertal · Germany · Phone: +49 202 4791-0 · Fax: +49 202 4791-393

info@stahlwille.de · www.stahlwille.com

© STAHLWILLE Eduard Wille GmbH & Co. KG, Wuppertal