



Basic wrench w.tool carrier for insert tools

730a Quick



Product no. **50584010**
GTIN **4018754268986**
Model **730A/10 QUICK**



Label. MANOSKOP® torque wrench 730a Quick 20-100N·m 9 x 12 mm L. 370mm

Properties.

- clicking type with dual stop signal
- no reset to '0' required
- the measuring element is only under load when a force is applied
- with holder for interchangeable insert tools
- with QuickRelease safety lock
- Quick adjustment thanks to easy-to-operate locking lever in handle.
- non-slip adjuster with thumb recess for quick torque adjustment
- dual scale N·m/in·lb
- counter-clockwise tightening by turning the insert tool over
- clicking mechanism insensitive to continuous loads and counter-loads (up to the max. measurement range of the torque wrench)
- optimal calibration with perfectControl® calibration systems No. 7794 or calibration systems No. 7706, 7791
- easy adjustment without disassembly via 2 external adjustment screws
- with 2-component handle
- calibration certificate in accordance with DIN EN ISO 6789-2:2017
- **accuracy $\pm 4\%$**

Benefits.

Quick adjustment thanks to easy-to-operate locking lever in handle.

Ergonomically shaped, non-slip adjuster with thumb recess and ergonomic handle for fatigue-free work.

With calibration certificate, accuracy $\pm 4\%$.

Efficient. No reset to '0' necessary, as the measuring element is only under load when a force is applied.

Clicking torque wrench with receptacle for interchangeable insert tools, double stop signal (tactile and audible), counter-clockwise tightening by turning the insert tools over.



Product highlights.



Rapid adjustment.

Easy and quick adjustment of the torque is carried out by an easy-to-operate clamping lever in the handle. The scale can be moved quickly and safely with an ergonomically shaped, non-slip adjustment element with thumb recess.



Adjustment does not require disassembly.

Quick adjustment from outside, no disassembly of the torque wrench required, with 2 adjustment points for the maximum & minimum values.

Technologies and features.



QuickRelease

The QuickRelease safety lock prevents unintentional loss of insert tools. These click securely into place, and are only released again at the push of a button for a quick tool change.



QuickSelect

Lightning-fast target value setting: Unlock the adjustment knob, set the value, and lock the knob again.



Low-wear flexible rod system

Our torque wrench is equipped with a low-wear release system with a bending beam. Unlike conventional torque wrenches with coiled springs, the flexible rod is not preloaded in the unloaded state, which means that the spring does not need to be reset to "0" after use.



2-component handle



Our 2-component handle is non-slip and ergonomically designed. It is resistant to the most common oils, greases, fuels, brake fluids, and Skydrol. The arrow markings on the handle indicate the direction of operation.



DIN EN ISO 6789-2

Our torque wrenches and torque screwdrivers are professionally calibrated in accordance with DIN EN ISO 6789-2 and delivered with a corresponding calibration certificate. We also calibrate the torque and angle wrenches in accordance with VDI 2648-2. This ensures the accuracy and traceability of our tools.

Technical drawing.

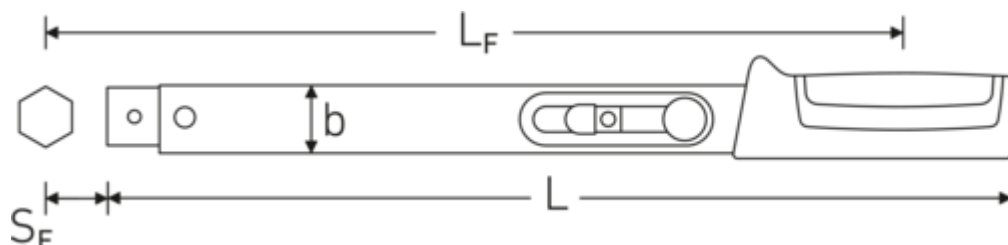

Technical attributes.

Scale division N·m	2,5 N·m
Scale division in·lb	20 in·lb
Measuring range N·m	20-100 N·m
Measuring range in·lb	180-880 in·lb
Width mm (b)	28 mm
DIN	DIN EN ISO 6789-2:2017
Size	a/10
Tool holder size [internal square]	9 x 12 mm
Height mm (h)	23 mm

Logistics data.

Depth mm (IFS)	371
Width mm (IFS)	50
Height mm (IFS)	35
WEEE/ElektroG	nicht ear-pflichtig
Length (packaged, mm)	400
Width (packaged, mm)	50
Height (packaging, mm)	45
Volume (packaged, dm ³)	0.9 dm ³
Product no.	50584010

Length mm (L)	370 mm	Weight (gross, kg)	1,044
LF	343 mm	Weight PAP (kg)	0,000
SF	17,5 mm	Weight PVC (kg)	0,011
		GTIN	4018754268986
		Country of origin AWR	GERMANY
		Region of origin	Nordrhein-Westfalen
		Customs tariff no.	82041100
		Packing standard	1
		Weight (g)	934 g

Variants.

Product no.	Model No. (ERP)	Description	GTIN
50584005	730A/5 QUICK	MANOSKOP® torque wrench 730a Quick 6-50N·m 9 x 12 mm L. 315mm	4018754268979
50584010	730A/10 QUICK	MANOSKOP® torque wrench 730a Quick 20-100N·m 9 x 12 mm L. 370mm	4018754268986
50584012	730A/12 QUICK	MANOSKOP® torque wrench 730a Quick 25-130N·m 14 x 18 mm L. 410mm	4018754268993
50584020	730A/20 QUICK	MANOSKOP® torque wrench 730a Quick 40-200N·m 14 x 18 mm L. 455mm	4018754269006

GTIN.



Images.



STAHLWILLE Eduard Wille GmbH & Co. KG

Lindenallee 27 · 42349 Wuppertal · Germany · Phone: +49 202 4791-0 · Fax: +49 202 4791-393

info@stahlwille.de · www.stahlwille.com

© STAHLWILLE Eduard Wille GmbH & Co. KG, Wuppertal