



Socket

460a

Product no. **02620024**
GTIN **4018754005109**
Model **460a 3/8**



Label. 3/8 " Socket Size 3/8" L.38mm

Properties.

- bi-hex with AS-Drive profile
- 3/8" internal square drive
- HPQ® high performance steel, chrome-plated
- SAE AS 954-E / S.B.A.C. AS 40610/40611 / ASME B 107.1


Technologies and features.



High Performance Quality (HPQ®)

Our HPQ® tool is made of wear-resistant high-performance steel, yet is thin-walled and lightweight. It withstands high torques and is ideal for work in confined spaces such as turbines.

Technical drawing.

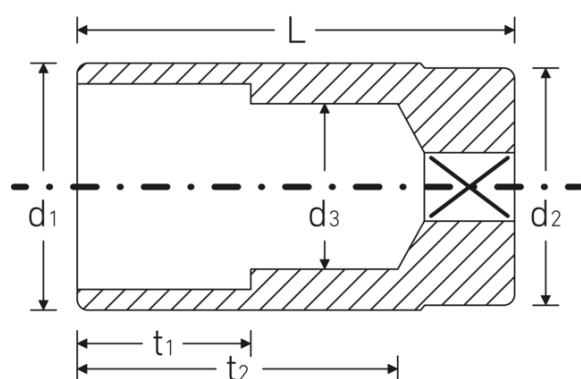

Technical attributes.

Drive profile	bi-hex AS-Drive
Square drive inner (inch)	3/8 "
d1	13,7 mm
d2	16,5 mm
d3	8,5 mm
Length mm (L)	38 mm
Size [inch]	3/8 "
t1	9 mm
t2	26,5 mm

Logistics data.

Depth mm (IFS)	38
Width mm (IFS)	17
Height mm (IFS)	17
WEEE/ElektroG	nicht ear-pflichtig
Length (packaged, mm)	90
Width (packaged, mm)	50
Height (packaging, mm)	17
Volume (packaged, dm3)	0.0765 dm3
Product no.	02620024
Weight (gross, kg)	0,145
Weight PAP (kg)	0,000
Weight PVC (kg)	0,005
GTIN	4018754005109
Country of origin AWR	GERMANY
Region of origin	Nordrhein-Westfalen
Customs tariff no.	82042000
Packing standard	5
Weight (g)	29 g

Variants.

Product no.	Model No. (ERP)	Description	GTIN
02620016	460a 1/4	3/8 " Socket Size 1/4" L.32mm	4018754005086
02620020	460a 5/16	3/8 " Socket Size 5/16" L.32mm	4018754005093
02620024	460a 3/8	3/8 " Socket Size 3/8" L.38mm	4018754005109

02620028	460a 7/16	3/8 " Socket Size 7/16" L.38mm	4018754005116
02620032	460a 1/2	3/8 " Socket Size 1/2" L.44mm	4018754005123

GTIN.

