



## Electronic workshop testing devices SENSOTORK®

**7707-2W**

Product no. **96521072**  
GTIN **4018754155781**  
Model **7707-2W**



### Label.

Electronic workshop testing device SENSOTORK® Measuring r.2-100N·m Internal square drive 3/8"

### Properties.

- for testing indicating and clicking type torque wrenches
- compact electronic testing device consisting of:
  - 1 patented transducer
  - 1 safety lock
  - 1 display
  - 1 stand with 1.5 metre cable for the display unit
  - 1 spiral cable
  - 1 power supply (110-230 V with interchangeable power outlet adaptors)
  - 4 interchangeable square drive adaptors
- large LCD for optimum readability
- horizontal or vertical orientation
- for controlled clockwise and counter-clockwise measurements
- 3 operating modes: running display of the applied torque (Track), display of the torque on click point detection (First-Peak), peak value display (Peak-Hold)
- for clicking type torque wrenches, the actual final torque applied is also displayed, in addition to the first peak
- with QuickRelease safety lock
- not affected by transverse forces due to its particularly low-profile design
- automatic detection of transducers
- particularly broad measurement range from about 2-100 % of the nominal value
- 3 measuring units (N·m, ft·lb, in·lb)
- software no. 7759-4, including USB adaptor and jack-push/pull cable, allows the measured values to be transmitted to a PC (no additional external power source required, power from the PC), not included, order separately (see page 51)
- when recalibrating a transducer, the test equipment remains on site and available for use with another transducer
- complies with the specifications of guideline DKD-R 10-8
- with factory certificate
- delivered in a sturdy plastic box
- **accuracy ± 1%**

## Benefits.

Electronic workshop testing device for checking and adjusting indicating and setting torque wrenches.

Measurement in the large torque range up to 1,100 N·m.

The interchangeable square adaptors stored in the base allow flexible use with standard square drive sizes.

Simple, quick and reliable testing of torque wrenches to ensure quality in production.

Simple changing of transducers enables quick adjustment to different measuring tasks and specific testing requirements.



## Product highlights.



PRODUCT IMAGE  
IN PROGRESS

### Flexible mounting.

Whether mounted horizontally or vertically - the well-designed mounting points, compact design and rotatable display allow flexible positioning anywhere in the workshop.



PRODUCT IMAGE  
IN PROGRESS

### Customised drive solution.

Up to 4 square adaptors are integrated into the mounting block of the device, within easy reach, to enable flexible use with standard square drive sizes.



PRODUCT IMAGE  
IN PROGRESS

### Adaptive measuring system.

Our SENSOTORK® 7707W features easily interchangeable transducers. This gives it the ability to be customised for individual measurement requirements.



PRODUCT IMAGE  
IN PROGRESS

### Resistance to transverse forces.

The high level of accuracy is achieved by flat transducers and a special technology for immediate data processing directly in the transducer. Thanks to an integrated measurement amplifier, the testing device is resistant to bending moments and transverse forces.

## Technologies and features.



### QuickRelease



The QuickRelease safety lock helps you to quickly mount and change transducers. The sensors lock into the calibration system adaptor and only unlock again at the push of a button.



### DIN EN ISO 6789-2

Our torque wrenches and torque screwdrivers are professionally calibrated in accordance with DIN EN ISO 6789-2 and delivered with a corresponding calibration certificate. We also calibrate angle-controlled torque wrenches in accordance with VDI 2648-2. This ensures the accuracy and traceability of our tools.

## Technical drawing.

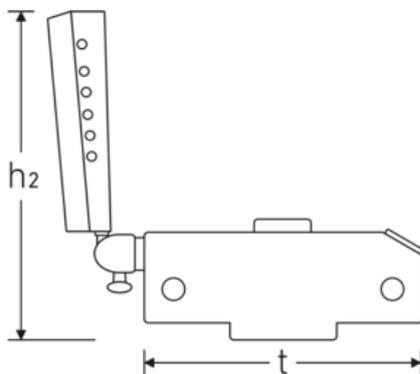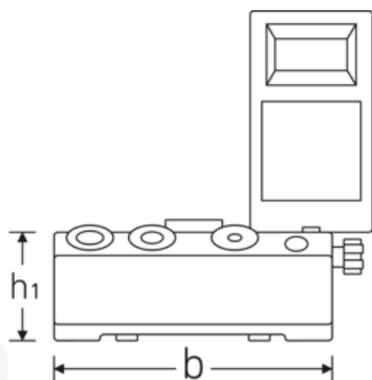

## Technical attributes.

Model No.	7707-2W
Measuring range N·m	2-100 N·m
Width mm (b)	180 mm

## Logistics data.

Product no.	96521072
GTIN	4018754155781
Weight (g)	7025 g

<b>Height mm (h1)</b>	79 mm	<b>Volume (packaged, dm3)</b>	24.854 dm3
<b>Height mm (h2)</b>	215 mm	<b>Packing standard</b>	1
<b>Internal square [inch]</b>	3/8 "	<b>WEEE/ElektroG</b>	Kleingeräte B2C
<b>t</b>	180 mm	<b>Customs tariff no.</b>	90318080
<b>Weight with box</b>	10300 g	<b>Country of origin AWR</b>	GERMANY
		<b>Region of origin</b>	Nordrhein-Westfalen
		<b>Depth mm (IFS)</b>	430
		<b>Width mm (IFS)</b>	340
		<b>Height mm (IFS)</b>	170
		<b>Weight (gross, kg)</b>	9,680
		<b>Weight PAP (kg)</b>	0,016
		<b>Weight PVC (kg)</b>	0,000
		<b>Length (packaged, mm)</b>	430
		<b>Width (packaged, mm)</b>	340
		<b>Height (packaging, mm)</b>	170

## Parts list.



11030010  
Square drive adaptor



52100050  
Display



52100051  
Body mount



52100058  
Torque wrench screws



52100059  
Torque wrench screws



52110051  
Jack cable



52110052  
Jack cable



52110056  
Power supply



81320002  
Plastic case

**GTIN.**



**STAHLWILLE Eduard Wille GmbH**

Lindenallee 27 · 42349 Wuppertal · Germany · Phone: +49 202 4791-0

[info@stahlwille.de](mailto:info@stahlwille.de) · [www.stahlwille.com](http://www.stahlwille.com)

© STAHLWILLE Eduard Wille GmbH, Wuppertal