



Double-ended ring spanner sets StahlwilleSTABIL®, inch

StahlwilleSTABIL® 20a

Product no. **96414402**
GTIN **4018754081158**
Model **StahlwilleSTABIL® 20a/6**



Label. Double-ended ring spanner set StahlwilleSTABIL® 20a/6 1/4x5/16-7/8x15/16 6 pcs.

- Properties.**
- **imperial, differing** end sizes
 - deeply cranked, support angle 75°
 - durable, slim and lightweight design
 - high flexural strength due to double-T profile
 - STAHLWILLE's rounded finish ensures a non-slip, pleasant feel
 - drop-forged, hardened, and cooled in an oil bath
 - Chrome Alloy Steel, chrome-plated
 - in cardboard packaging

Benefits.

High-quality double-ended ring spanner set, deep cranked (75°) for tight and awkward areas, with imperial spanner sizes.

The bi-hex AS-Drive profile protects screws and nuts because the force is applied specifically to the flanks – not the edges.

Made of robust Chrome Alloy Steel and additionally chrome-plated for high durability, reliable corrosion protection and enormous wear resistance.

A special manufacturing process enables thin-walled rings – slim for use in confined areas and at the same time robust enough for high loads.

The distinctive STAHLWILLE rounded finish gives the spanner a non-slip and comfortable feel for safe working, even with oily hands.

Product highlights.



PRODUCT IMAGE
IN PROGRESS

Powerful set for confined spaces.

The deeply cranked, compact StahlwilleSTABIL® double-ended ring spanner set in a sturdy cardboard box with unequal spanner sizes is a reliable companion for work in automotive workshops, mechanical and plant engineering, sanitary installations and general maintenance, especially when bolted connections are difficult to access. The different spanner sizes cover common screw connections on engine components, hydraulic and pneumatic systems and precision mechanics, while the cranked shape enables safe power transmission even in deep or concealed areas.



PRODUCT IMAGE
IN PROGRESS

For angled areas.

Our double-ended ring spanners fit comfortably in the hand and provide a secure, stable feel even with tight screws. Thanks to their 75° cranked shape, they reliably reach awkward or hard-to-reach areas - exactly where conventional spanners quickly reach their limits.



PRODUCT IMAGE
IN PROGRESS

Optimum power transmission.

Each spanner guarantees consistently excellent quality thanks to minimal manufacturing tolerances and high reproducible precision. The jaw and ring always fit securely on the screw, ensuring optimum power transmission.



PRODUCT IMAGE
IN PROGRESS

Non-slip surface.

STAHLWILLE spanners feature a high-quality, non-slip surface texture that enables safe working even with oily hands. The non-slip texture increases control during handling.



PRODUCT IMAGE
IN PROGRESS

High-quality workmanship.

The key is forged from high-quality Chrome Alloy Steel, which gives it high stability and resistance even in continuous use. It is also chrome-plated for corrosion resistance.

Technologies and features.




Double-T profile

Our ring, open-ended and combination spanners have an additional recess in the middle of the tool. Similar to the principle of a double-T beam, this provides a tremendous load capacity and maximum strength whilst reducing weight.



Anti-Slip-Drive


The special AS-Drive profile makes high force transmission to the flats of bolts and nuts possible without damaging them. This also prevents stripping of the screw head.



Thin-walled rings

The thin-walled diameter of our rings makes it easier to work in confined spaces. The ring wall is deeper than standard nuts, which prevents jamming.

Technical drawing.

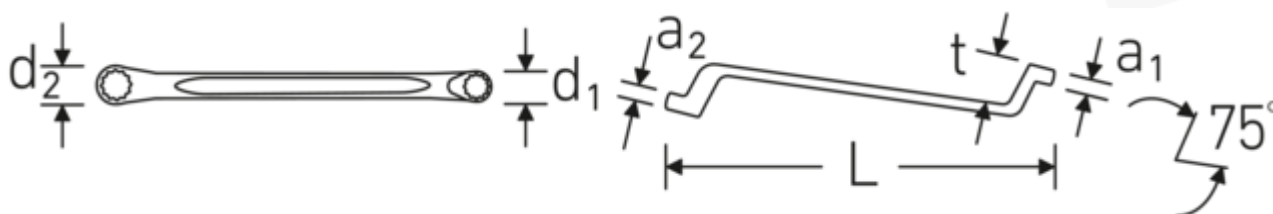

Technical attributes.

Contents	1/4 x 5/16; 3/8 x 7/16; 1/2 x 9/16; 5/8 x 3/4; 11/16 x 13/16; 7/8 x 15/16"
Model No.	20a/6
Range	1/4x5/16-7/8x15/16
Alloy	Chrome Alloy Steel
Surface	chrome-plated

Logistics data.

Product no.	96414402
GTIN	4018754081158
Weight (g)	1200 g
Volume (packaged, dm3)	0.77 dm3
Packing standard	1
WEEE/ElektroG	nicht ear-pflichtig

Number of tools	6 pcs.	Customs tariff no.	82041100
		Country of origin AWR	GERMANY
		Region of origin	Nordrhein-Westfalen
		Depth mm (IFS)	350
		Width mm (IFS)	55
		Height mm (IFS)	40
		Weight (gross, kg)	1,200
		Weight PAP (kg)	0,066
		Weight PVC (kg)	0,000
		Length (packaged, mm)	350
		Width (packaged, mm)	55
		Height (packaging, mm)	40

Parts list.



41441620
Double-ended ring
spanner



41442428
Double-ended ring
spanner



41443234
Double-ended ring
spanner



41443640
Double-ended ring
spanner



41443842
Double-ended ring
spanner



41444446
Double-ended ring
spanner

GTIN.





STAHLWILLE Eduard Wille GmbH

Lindenallee 27 · 42349 Wuppertal · Germany · Phone: +49 202 4791-0

info@stahlwille.de · www.stahlwille.com

© STAHLWILLE Eduard Wille GmbH, Wuppertal