

## Torque wrench Standard MANOSKOP® with fixed square drive

**720NF/80**



Product no. **50190081**  
GTIN **4018754031931**  
Model **720NF/80**



### Label.

Torque wrench Standard MANOSKOP® 720NF/80 160-800N·m 3/4" L. 1034mm

### Properties.

- clicking type with dual stop signal
- 3/4" external square drive
- Quick adjustment thanks to easy-to-operate locking lever in handle
- dual scale N·m/ft·lb
- anti-clockwise tightening through a reversible square
- all sensitive parts are protected by the robust tubular steel housing in alu-U-profile
- optimal calibration with perfectControl® calibration systems No. 7794 or calibration systems No. 7706, 7791
- easy adjustment without disassembly via 2 external adjustment screws
- delivered in a textile bag
- calibration certificate in accordance with DIN EN ISO 6789-2:2017
- **accuracy ± 4%**

### Product highlights.



**PRODUCT IMAGE  
IN PROGRESS**

#### **Adjustment does not require disassembly.**

Quick adjustment from outside, no disassembly of the torque wrench required, with 2 adjustment points for the maximum & minimum values.

## Technologies and features.


**DIN EN  
ISO 6789-2**

### DIN EN ISO 6789-2




Our torque wrenches and torque screwdrivers are professionally calibrated in accordance with DIN EN ISO 6789-2 and delivered with a corresponding calibration certificate. We also calibrate angle-controlled torque wrenches in accordance with VDI 2648-2. This ensures the accuracy and traceability of our tools.

### Low-wear bending beam system

Our torque wrench is equipped with a low-wear release system with a bending beam. Unlike conventional torque wrenches with coiled springs, the bending beam is not subjected to any load until the tool is in operation, which means that resetting to '0' is not necessary after use.



## Technical drawing.

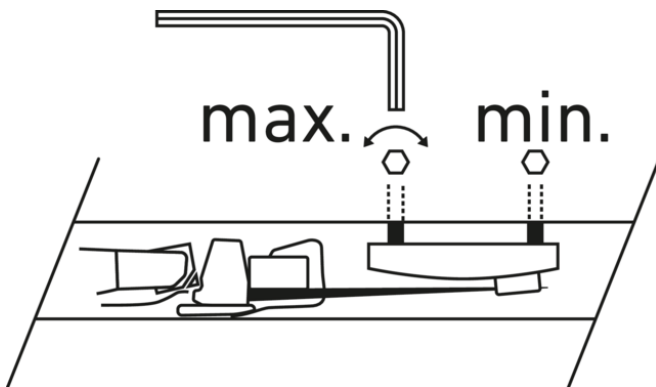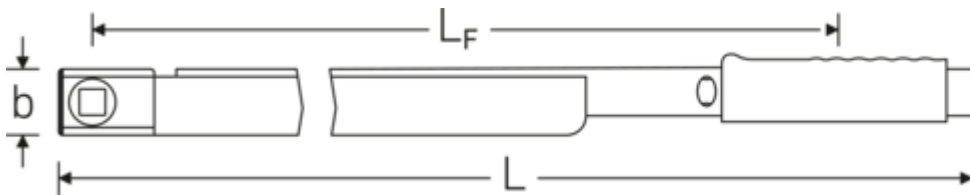

## Technical attributes.

Anzeigeabweichung	± 4 %
Measuring range N·m	160-800 N·m
Measuring range ft·lb	120-600 ft·lb
MA N·m	160 N·m

## Logistics data.

Product no.	50190081
GTIN	4018754031931
Weight (g)	5650 g
Volume (packaged, dm <sup>3</sup> )	5.3235 dm <sup>3</sup>

Nominal value N·m	800 N·m	Packing standard	1
Scale division N·m	20 N·m	WEEE/ElektroG	nicht ear-pflichtig
Scale division ft·lb	20 ft·lb	Customs tariff no.	82041100
External square drive (inch)	3/4	Country of origin AWR	GERMANY
Length mm (L)	1034 mm	Region of origin	Nordrhein-Westfalen
Width mm (b)	45 mm	Depth mm (IFS)	1038
Height mm (h)	42 mm	Width mm (IFS)	55
LF	938 mm	Height mm (IFS)	60
		Weight (gross, kg)	6,500
		Weight PAP (kg)	0,000
		Weight PVC (kg)	0,045
		Length (packaged, mm)	1170
		Width (packaged, mm)	70
		Height (packaging, mm)	65

## GTIN.



## Accessories (for).



81231101  
Textile cases for large  
torque wrench

**STAHLWILLE Eduard Wille GmbH**

Lindenallee 27 · 42349 Wuppertal · Germany · Phone: +49 202 4791-0

info@stahlwille.de · www.stahlwille.com

© STAHLWILLE Eduard Wille GmbH, Wuppertal