

Torque wrenches Standard MANOSKOP®

721QR Quick



| | |
|-------------|----------------|
| Product no. | 50204120 |
| GTIN | 4018754268962 |
| Model | 721QR/20 QUICK |



Label. MANOSKOP® torque wrench 721QR Quick 40-200N·m 1/2" L. 482mm

Properties.

- clicking type with dual stop signal
- Quick adjustment thanks to easy-to-operate locking lever in handle
- with permanently installed QuickRelease ratchet
- 36 teeth
- with QuickRelease safety lock
- no reset to '0' required
- the measuring element is only under load when a force is applied
- dual scale N·m/ft·lb
- non-slip adjuster with thumb recess for quick torque adjustment
- clicking mechanism insensitive to continuous loads and counter-loads (up to the max. measurement range of the torque wrench)
- optimal calibration with perfectControl® calibration systems No. 7794 or calibration systems No. 7706, 7791
- easy adjustment without disassembly via 2 external adjustment screws
- for controlled clockwise tightening
- with 2-component handle
- calibration certificate in accordance with DIN EN ISO 6789-2:2017
- **accuracy ± 4%**

Benefits.

Quick adjustment thanks to easy-to-operate locking lever in handle.

Ergonomically shaped, non-slip adjuster with thumb recess and ergonomic handle for fatigue-free work.

With calibration certificate, accuracy ± 4%.

Efficient. No reset to '0' required, as the measuring element is only under load when a force is applied.

Clicking torque wrench with permanently installed 1/2" QuickRelease ratchet, double stop signal (tactile and audible), left-hand tightening by flipping over the insert tool.



Product highlights.



Rapid adjustment.


Easy and quick adjustment of the torque is carried out by an easy-to-operate clamping lever in the handle. The scale can be moved quickly and safely with an ergonomically shaped, non-slip adjustment element with thumb recess.



Adjustment does not require disassembly.

Quick adjustment from outside, no disassembly of the torque wrench required, with 2 adjustment points for the maximum & minimum values.

Technologies and features.




QuickRelease

The QuickRelease safety lock prevents unintentional loss of sockets and insert tools. These click securely into place, and are only released again at the push of a button for a quick tool change. In transducers: The QuickRelease safety lock helps you to quickly mount and change transducers. The transducers lock into the calibration system and only unlock again at the push of the buttons.



QuickSelect

Lightning-fast target value setting: Unlock the adjustment knob, set the value, and lock the knob again.



Low-wear bending beam system

Our torque wrench is equipped with a low-wear release system with a bending beam. Unlike conventional torque wrenches with coiled springs, the bending beam is not subjected to any load until the tool is in operation, which means that resetting to '0' is not necessary after use.



2-component handle




Our 2-component handle is non-slip and ergonomically designed. It is resistant to the most common oils, greases, fuels, brake fluids, and Skydrol. The arrow markings on the handle indicate the direction of operation.



DIN EN ISO 6789-2

Our torque wrenches and torque screwdrivers are professionally calibrated in accordance with DIN EN ISO 6789-2 and delivered with a corresponding calibration certificate. We also calibrate angle-controlled torque wrenches in accordance with VDI 2648-2. This ensures the accuracy and traceability of our tools.

Technical drawing.

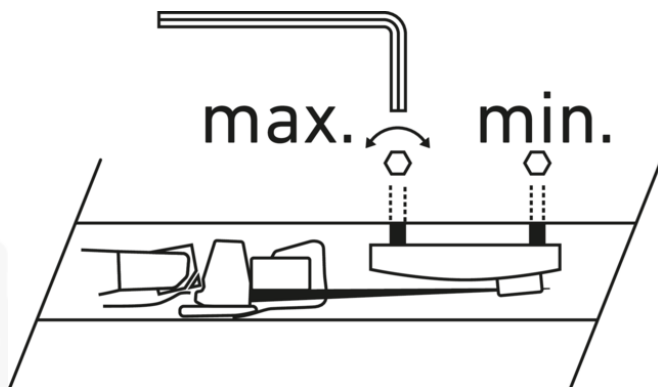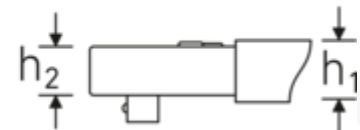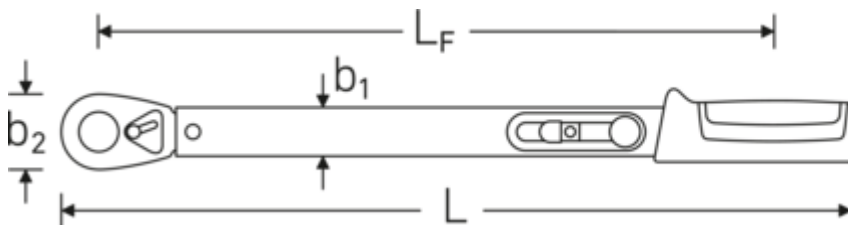

Technical attributes.

| | |
|------------------------------|---------------------------|
| Size | 20 |
| Anzeigeabweichung | ± 4 % |
| Measuring range N·m | 40-200 N·m |
| Measuring range ft·lb | 30-145 ft·lb |
| MA N·m | 40 N·m |
| Nominal value N·m | 200 N·m |
| Scale division N·m | 5 N·m |
| Scale division ft·lb | 5 ft·lb |
| External square drive (inch) | 1/2 |
| Length mm (L) | 482 mm |
| b1 | 28 mm |
| b2 | 41 mm |
| Height mm (h1) | 23 mm |
| Height mm (h2) | 18 mm |
| DIN | DIN EN ISO 6789-2:2017 |
| LF | 416,5 mm |

Logistics data.

| | |
|-------------------------------------|-------------------------|
| Product no. | 50204120 |
| GTIN | 4018754268962 |
| Weight (g) | 1338 g |
| Volume (packaged, dm ³) | 1.03275 dm ³ |
| Packing standard | 1 |
| WEEE/ElektroG | nicht ear-pflichtig |
| Customs tariff no. | 82041100 |
| Country of origin AWR | GERMANY |
| Region of origin | Nordrhein-Westfalen |
| Depth mm (IFS) | 481 |
| Width mm (IFS) | 45 |
| Height mm (IFS) | 35 |
| Weight (gross, kg) | 1,446 |
| Weight PAP (kg) | 0,000 |
| Weight PVC (kg) | 0,110 |
| Length (packaged, mm) | 510 |
| Width (packaged, mm) | 45 |
| Height (packaging, mm) | 45 |

GTIN.



Images.





STAHLWILLE Eduard Wille GmbH

Lindenallee 27 · 42349 Wuppertal · Germany · Phone: +49 202 4791-0

info@stahlwille.de · www.stahlwille.com

© STAHLWILLE Eduard Wille GmbH, Wuppertal